

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.70	Ohms
2	Fs	101.99	Hz
3	Re	5.72	Ohms[dc]
4	Res	51.93	Ohms
5	Qms	3.51	
6	Qes	0.39	
7	Qts	0.35	
8	L1	0.16	mH
9	L2	0.76	mH
10	R2	8.55	Ohms
11	RMSE-load	0.58	Ohms
12	Vas(Sd)	16.51	liters
13	Mms	27.30	grams
14	Cms	89	$\mu\text{M}/\text{Newton}$
15	B1	16.08	Tesla-M
16	SPLref(Sd)	98.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 363.05 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.7% (-20% to -50% is recommended).


RCF MR10H300

MLSSA: Parameters

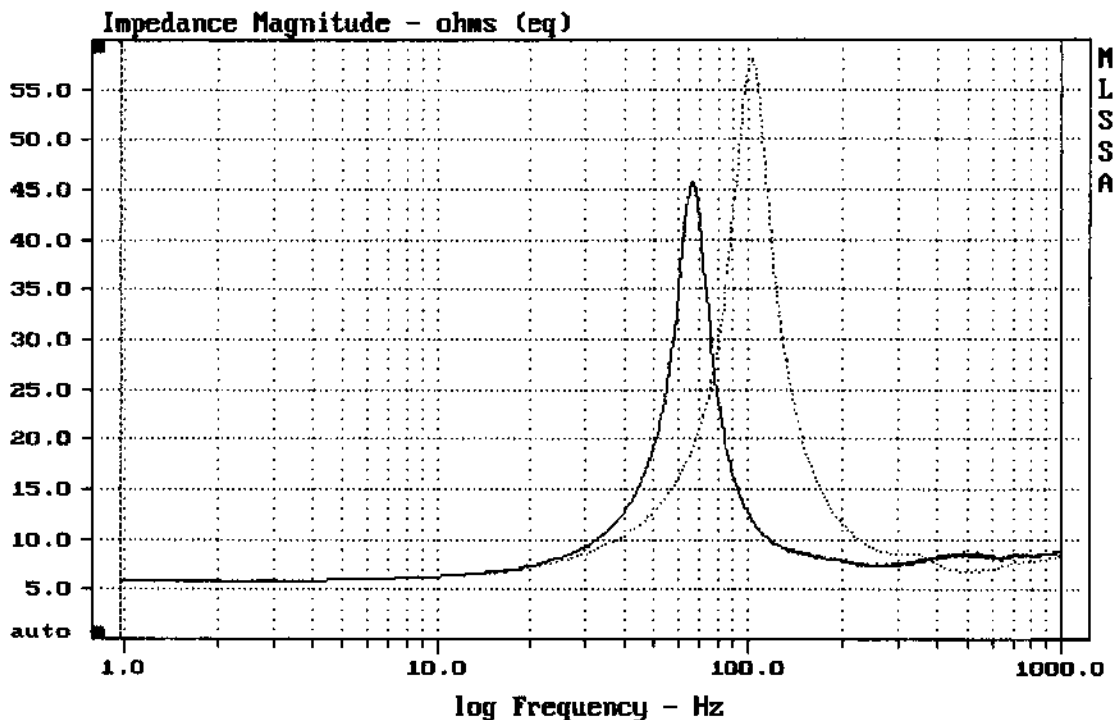

mean: 10.72, rms: 13.8, std: 8.696, max: 58.01, min: 5.003


MLSSA: Frequency Domain

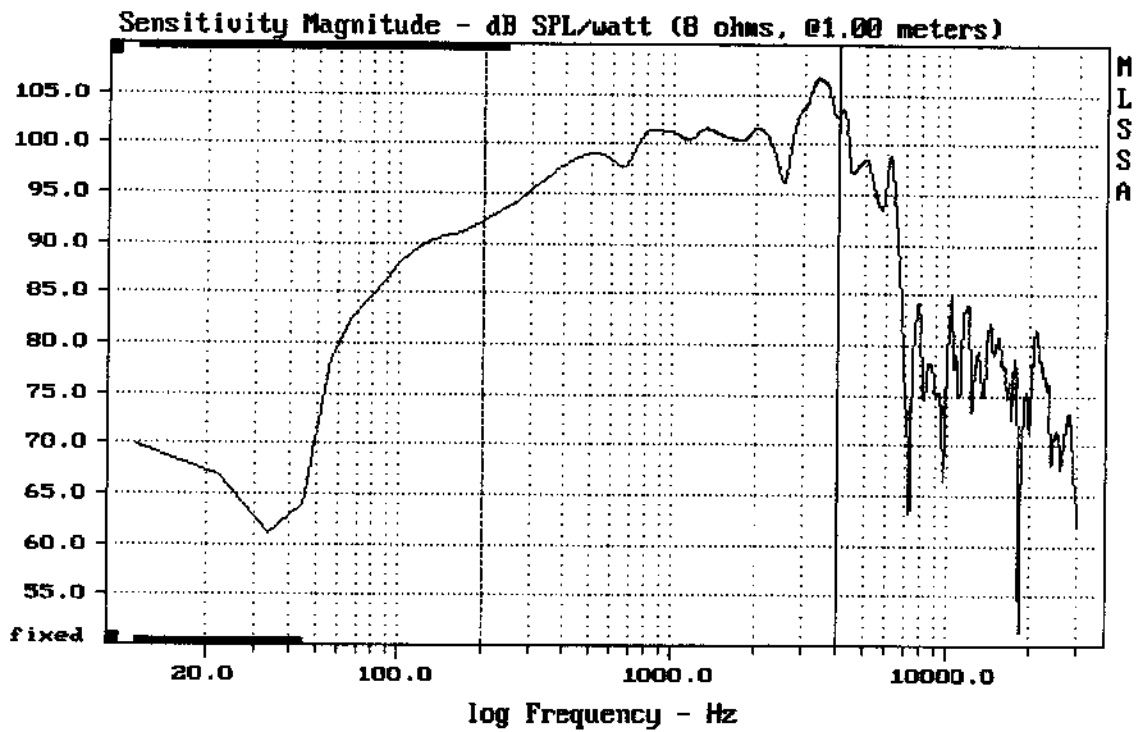

Level (200:400 Hz) = 100.50 dB SPL/watt (8 ohms, @1.00 meters)

RCF MR10H300

MLSSA: Frequency Domain

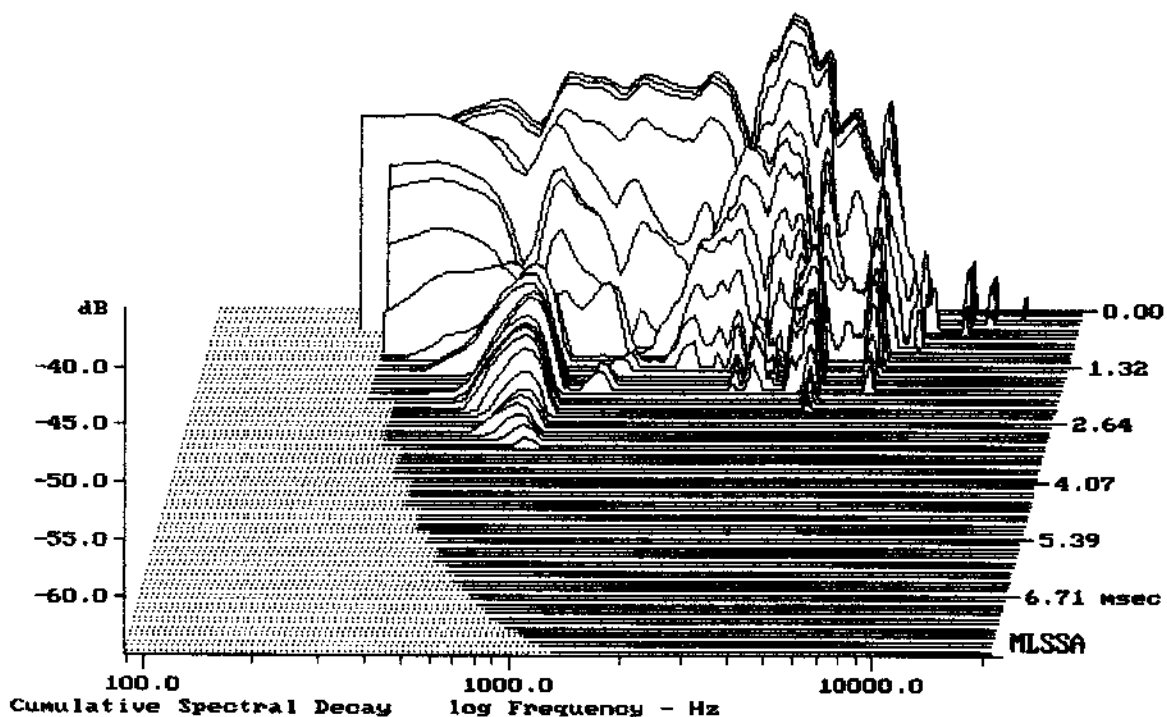

-63.65 dB, 4306 Hz (97), 2.310 msec (22)