

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.37	Ohms
2	Fs	104.35	Hz
3	Re	6.60	Ohms[dc]
4	Res	89.36	Ohms
5	Qms	8.18	
6	Qes	0.60	
7	Qts	0.56	
8	L1	0.36	mH
9	L2	1.05	mH
10	R2	7.12	Ohms
11	RMSE-load	1.01	Ohms
12	Vas(Sd)	27.13	liters
13	Mms	15.87	grams
14	Cms	147	$\mu\text{M}/\text{Newton}$
15	Bl	10.66	Tesla-M
16	SPLref(Sd)	98.9	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (30.00 grams)

Area (Sd): 363.05 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -38.9% (-20% to -50% is recommended).


FANE AX10

MLSSA: Parameters

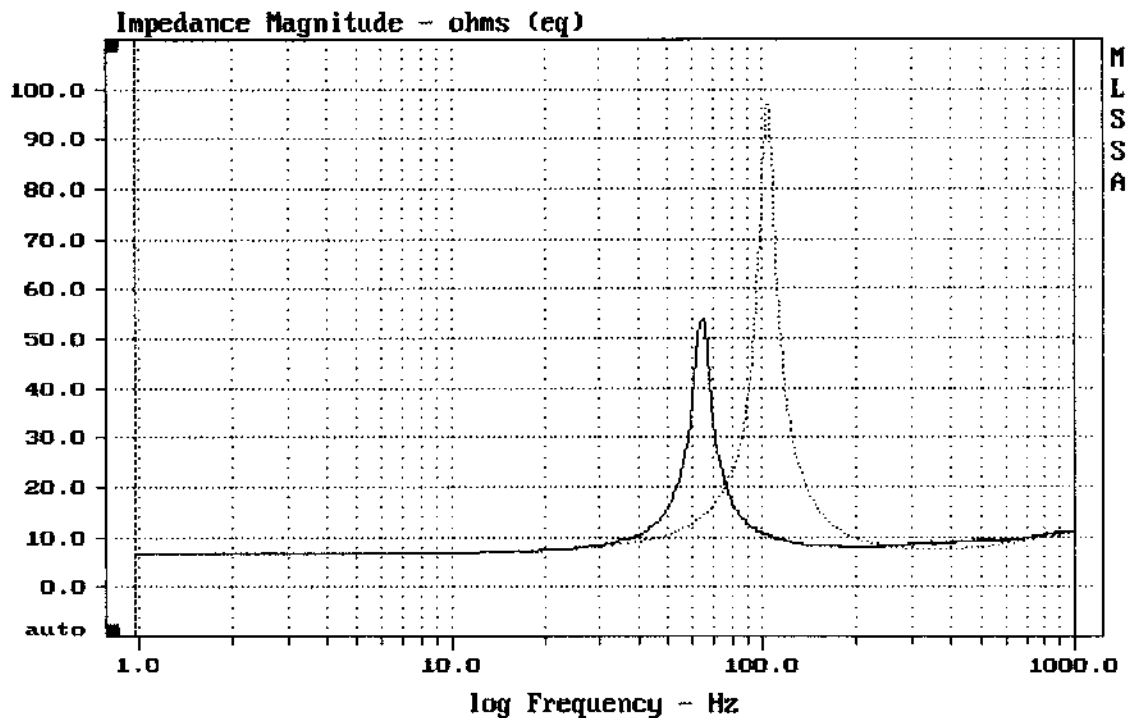

mean: 11.51, rms: 15.67, std: 10.63, max: 96.73, min: 6.603


MLSSA: Frequency Domain

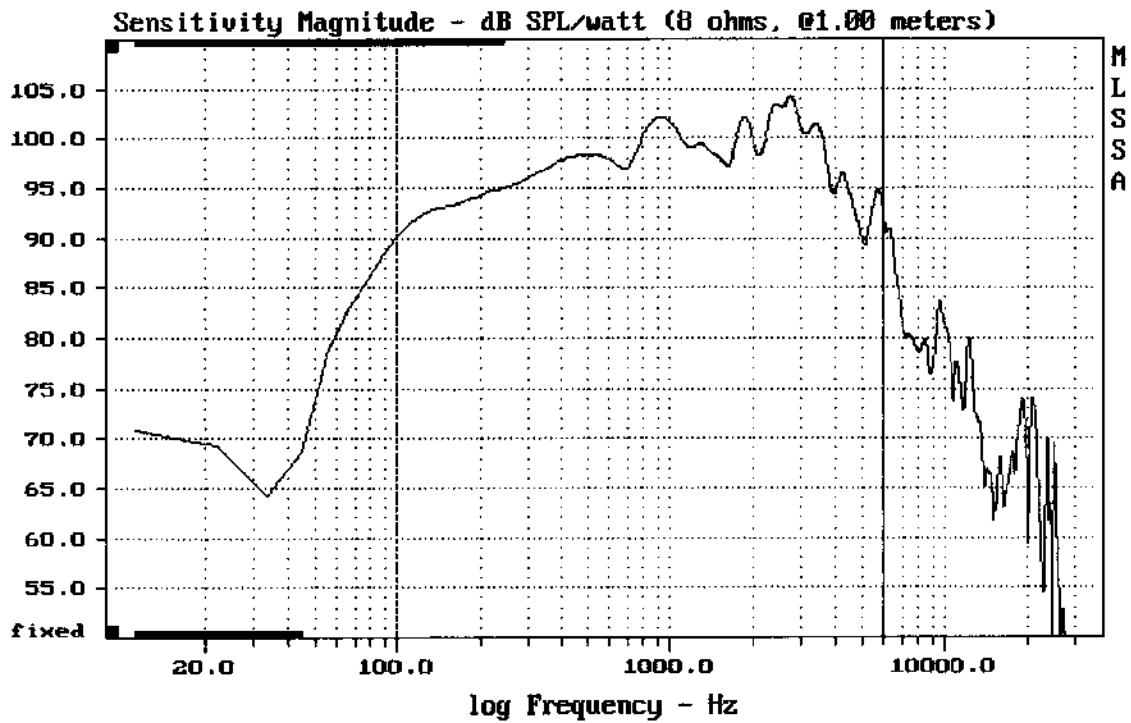

Level (100:6004 Hz) = 98.43 dB SPL/watt (8 ohms, @1.00 meters)

FANE AX10

MLSSA: Frequency Domain

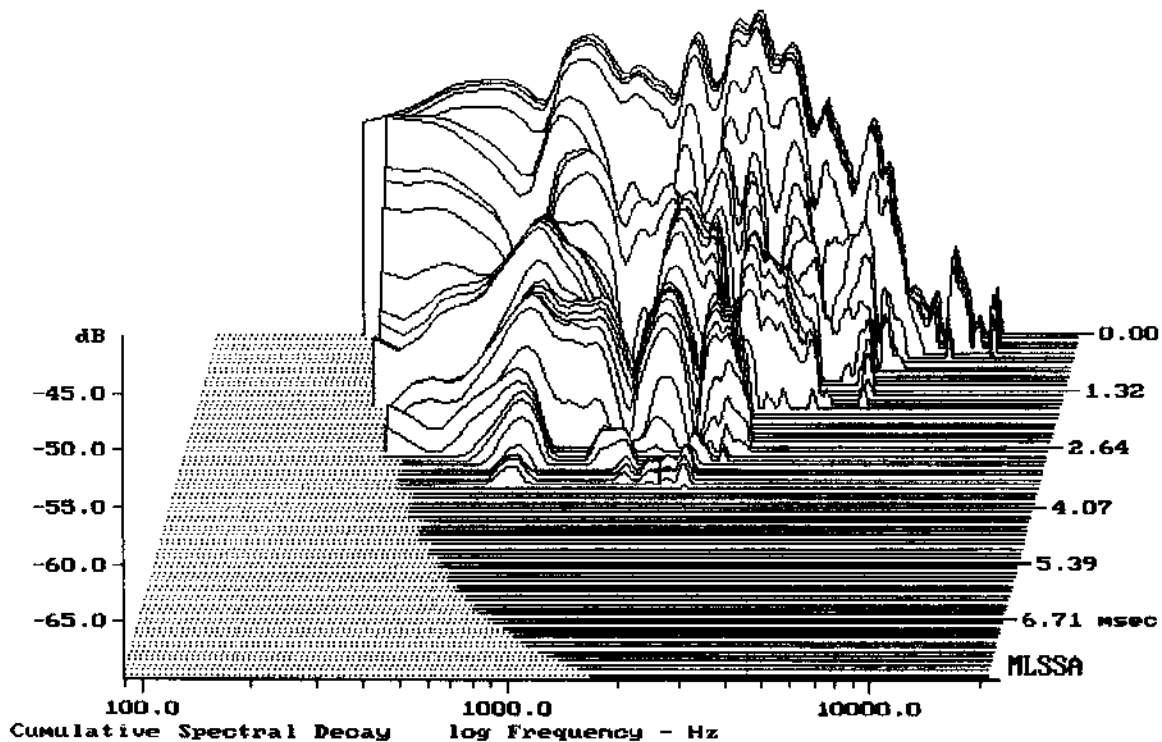

-69.27 dB, 1864 Hz (42), 3.410 msec (32)