

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.31	Ohms
2	Fs	85.48	Hz
3	Re	6.11	Ohms[dc]
4	Res	86.09	Ohms
5	Qms	8.46	
6	Qes	0.60	
7	Qts	0.56	
8	L1	0.30	mH
9	L2	0.84	mH
10	R2	5.43	Ohms
11	RMSE-load	0.60	Ohms
12	Vas(Sd)	29.90	liters
13	Mms	19.54	grams
14	Cms	177	$\mu\text{M}/\text{Newton}$
15	B1	10.33	Tesla-M
16	SPLref(Sd)	96.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.5% (-20% to -50% is recommended).


FANE AX10-75BASS

MLSSA: Parameters

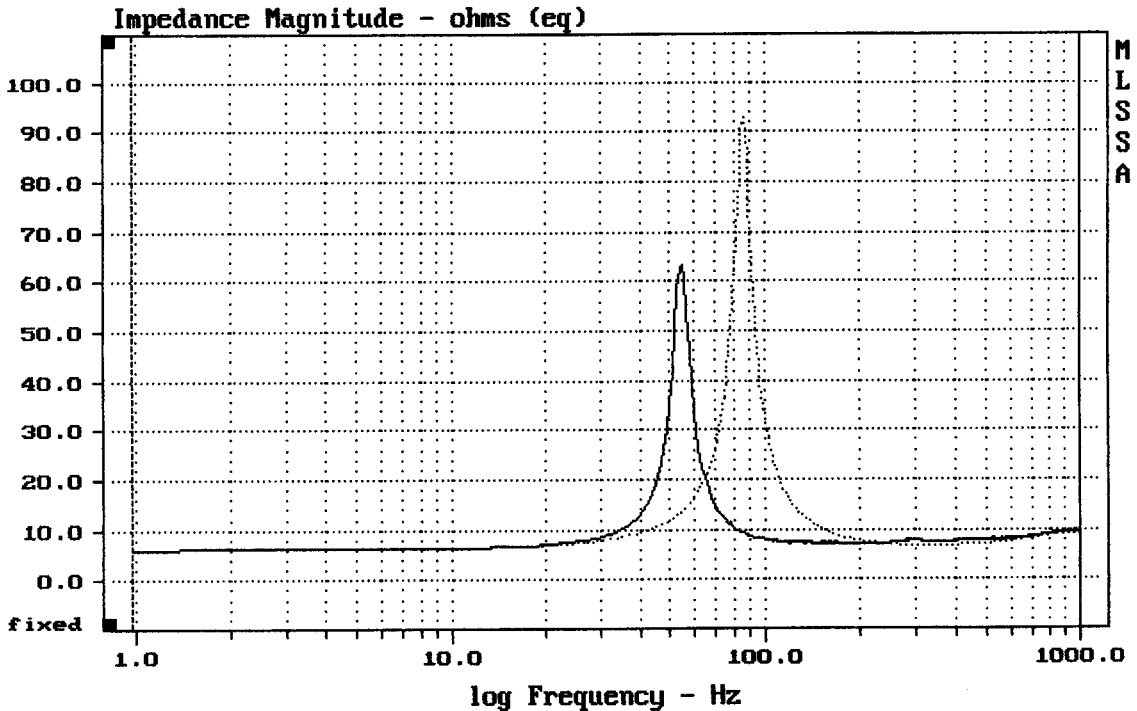

mean: 10.01, rms: 13.65, std: 9.279, max: 92.83, min: 6.126


MLSSA: Frequency Domain

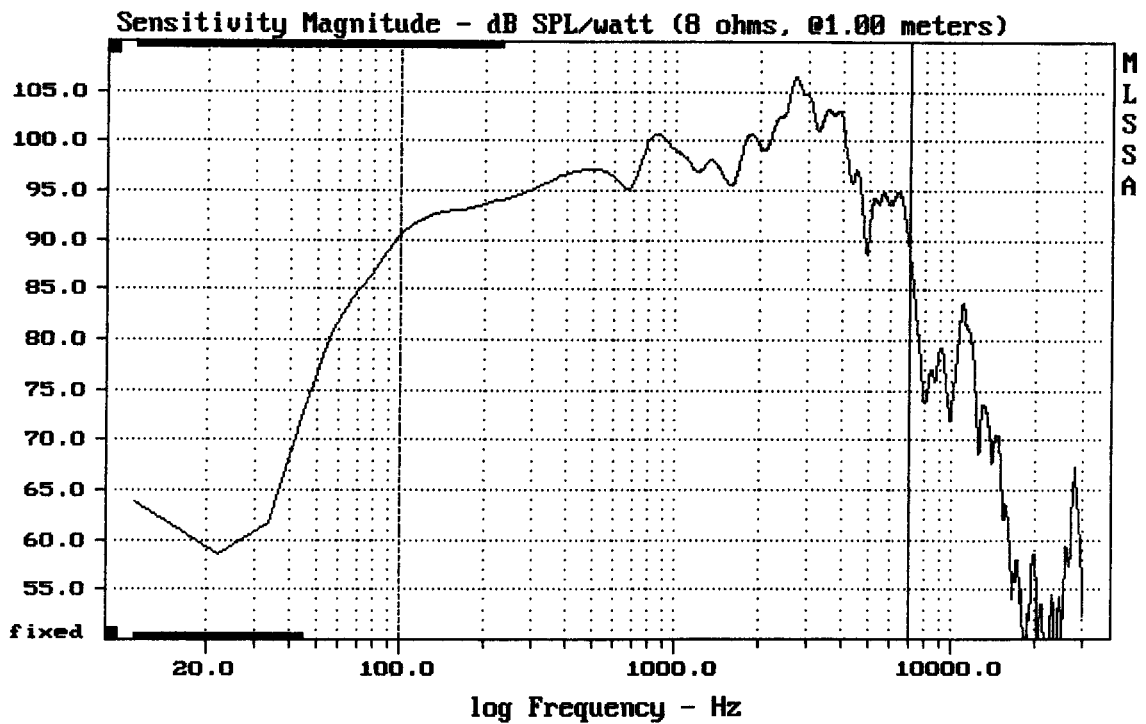

Level (100:7002 Hz) = 98.45 dB SPL/watt (8 ohms, @1.00 meters)

FANE AX10-75BASS

MLSSA: Frequency Domain

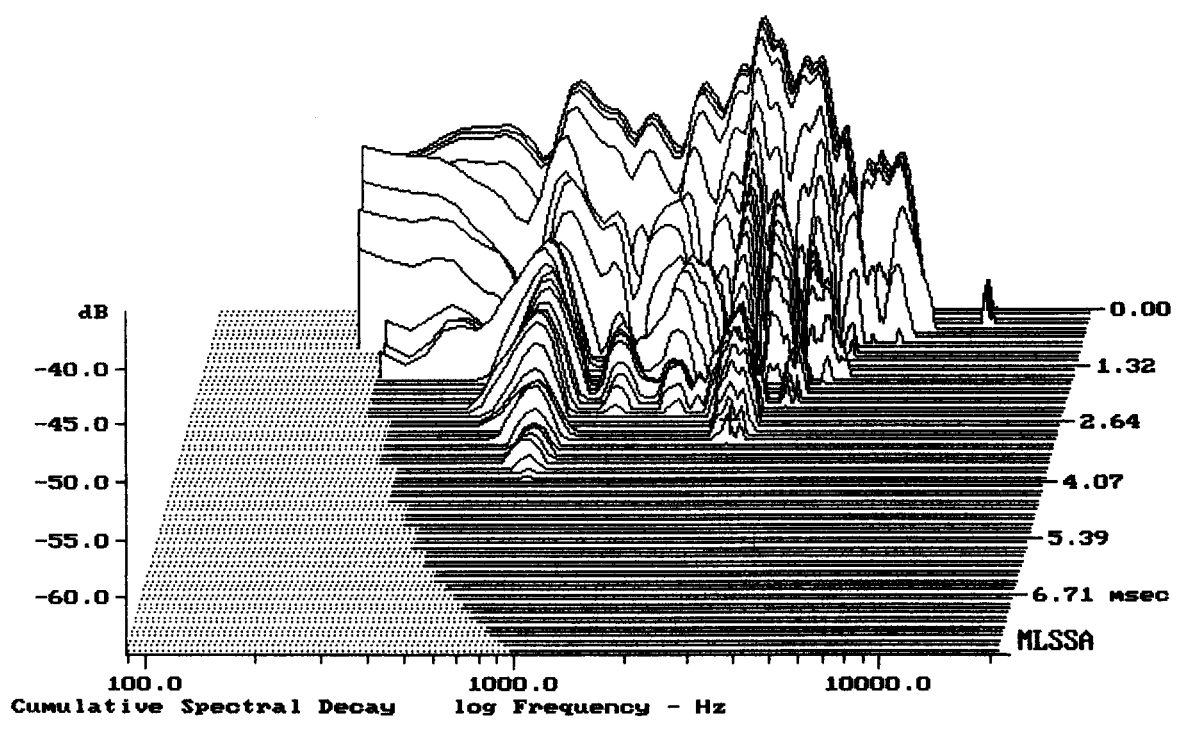

-63.20 dB, 2708 Hz (61), 3.080 msec (29)