

Line	Parameter	Value	Units
1	RMSE-free	0.96	Ohms
2	Fs	34.84	Hz
3	Re	5.77	Ohms[dc]
4	Res	152.03	Ohms
5	Qms	10.46	
6	Qes	0.40	
7	Qts	0.38	
8	L1	3.58	mH
9	L2	2.83	mH
10	R2	10.70	Ohms
11	RMSE-load	0.87	Ohms
12	Vas(Sd)	239.01	liters
13	Mms	184.15	grams
14	Cms	113	$\mu\text{M}/\text{Newton}$
15	Bl	24.20	Tesla-M
16	SPLref(Sd)	95.9	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1225.42 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.0% (-20% to -50% is recommended).


SELENIUM 18SW2P

MLSSA: Parameters

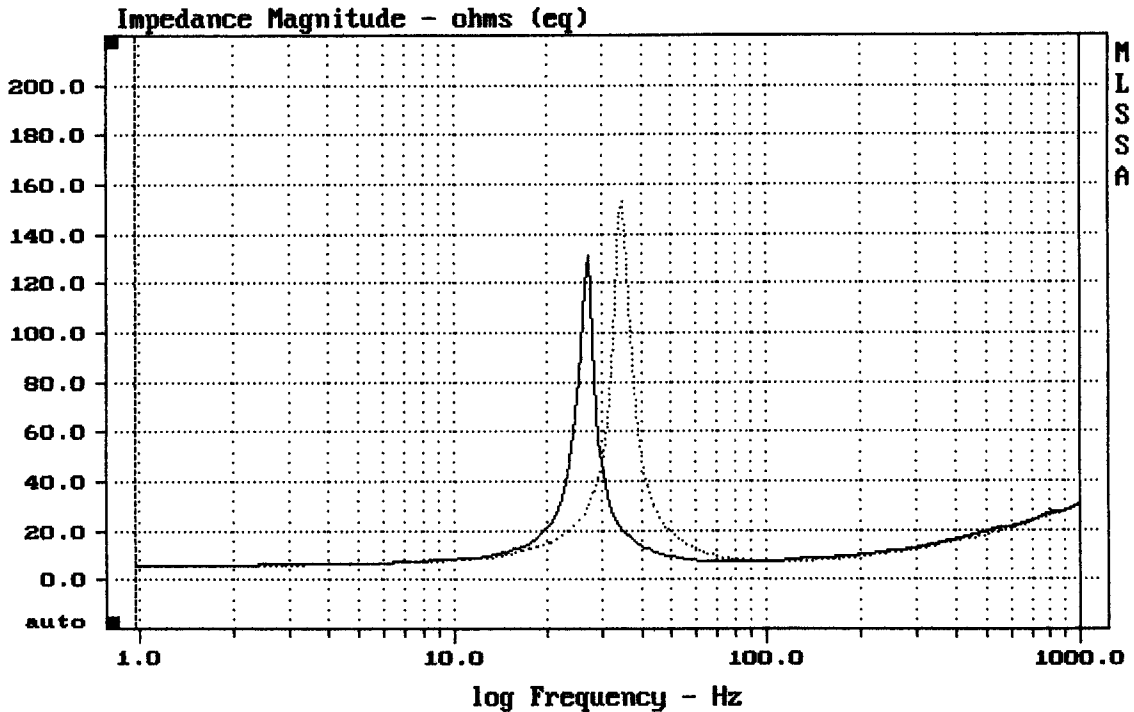

mean: 19.42, rms: 22.41, std: 11.19, max: 153.1, min: 5.755


DTTO

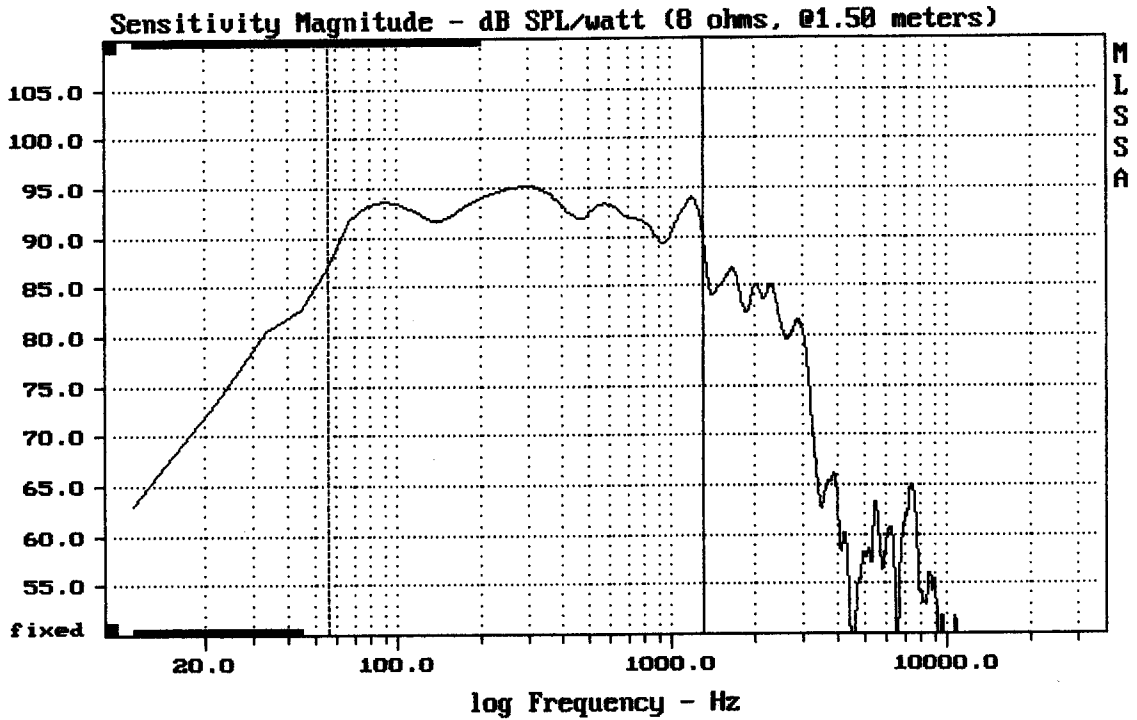

Level (55:1298 Hz) = 92.87 dB SPL/watt (8 ohms, @1.50 meters)

SELENIUM 18SW2P

MLSSA: Frequency Domain

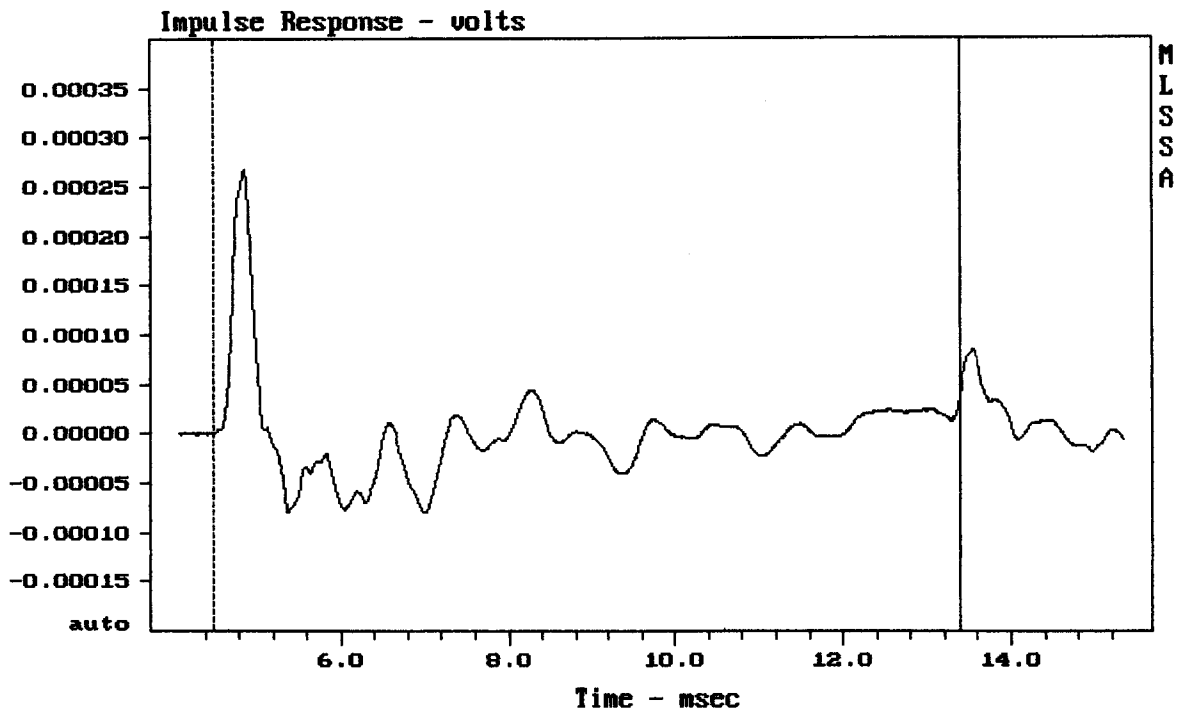

mean: -6.619e-007, rms: 4.782e-005, std: 4.782e-005, max: 0.0002675, min: -7.9