

Line	Parameter	Value	Units
1	RMSE-free	1.09	Ohms
2	Fs	43.76	Hz
3	Re	5.86	Ohms[dc]
4	Res	179.25	Ohms
5	Qms	9.71	
6	Qes	0.32	
7	Qts	0.31	
8	L1	1.12	mH
9	L2	2.53	mH
10	R2	10.11	Ohms
11	RMSE-load	1.17	Ohms
12	Vas(Sd)	157.30	liters
13	Mms	151.90	grams
14	Cms	87	$\mu\text{M}/\text{Newton}$
15	B1	27.76	Tesla-M
16	SPLref(Sd)	98.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.5% (-20% to -50% is recommended).

PDN.18SB40


MLSSA: Parameters

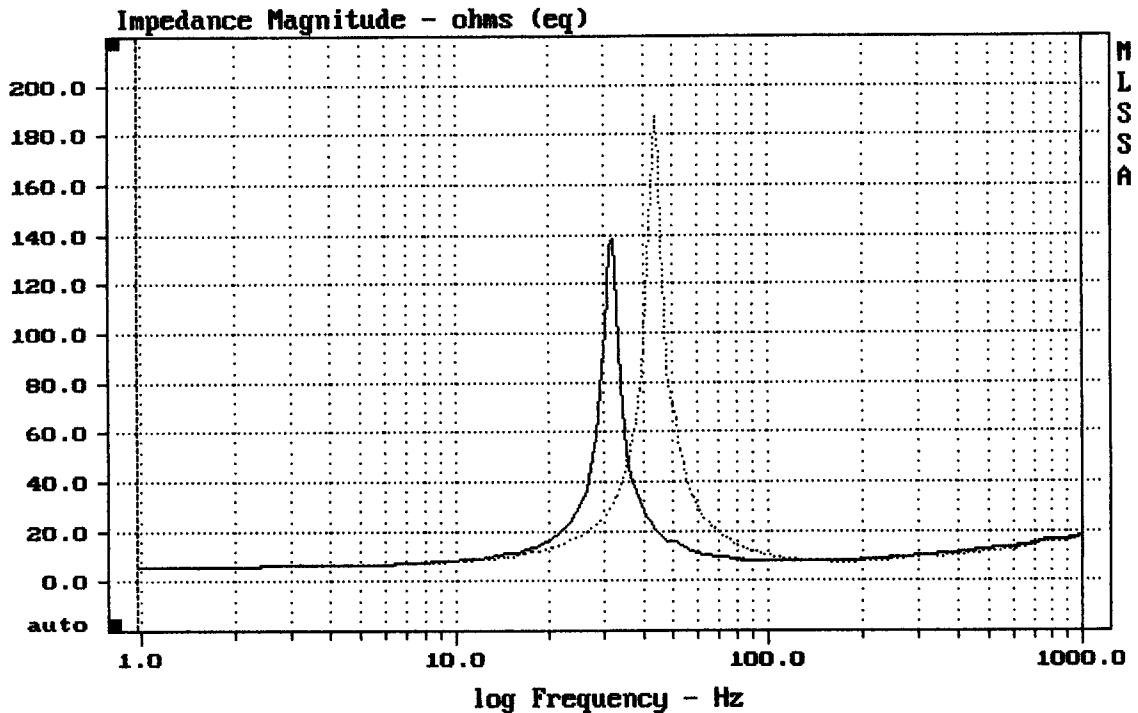

mean: 14.42, rms: 19.66, std: 13.36, max: 187.1, min: 5.897

DTTO


MLSSA: Frequency Domain

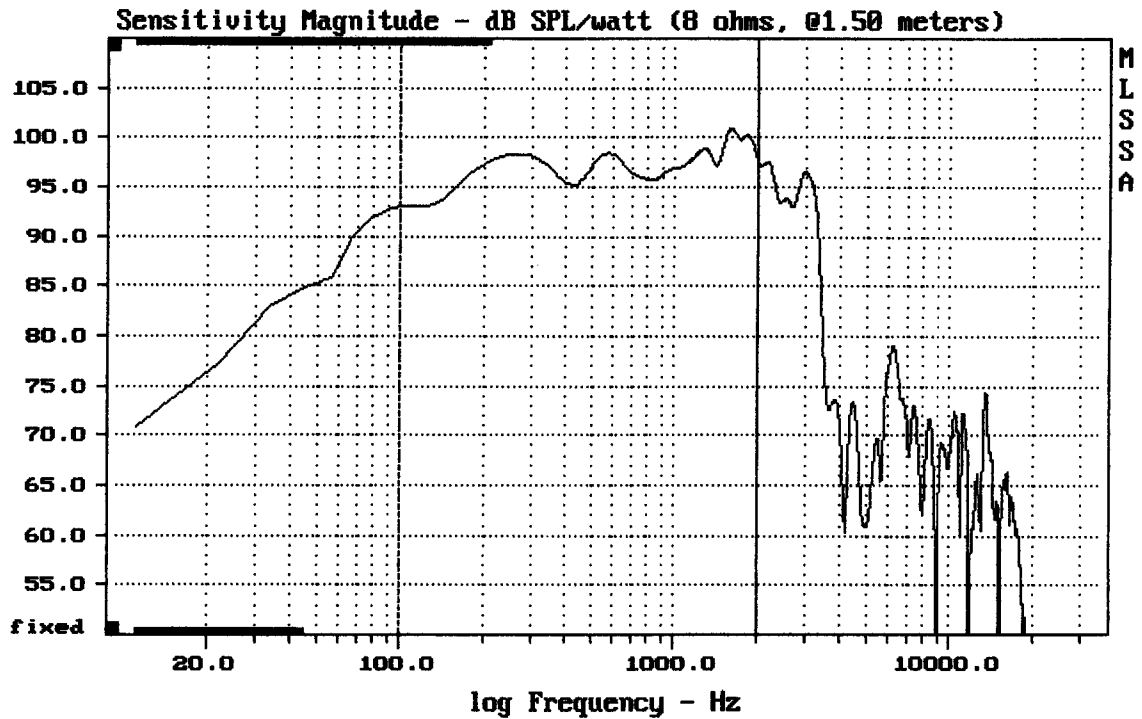

Level (100:1998 Hz) = 97.19 dB SPL/watt (8 ohms, @1.50 meters)

PDN.18SB40

MLSSA: Frequency Domain

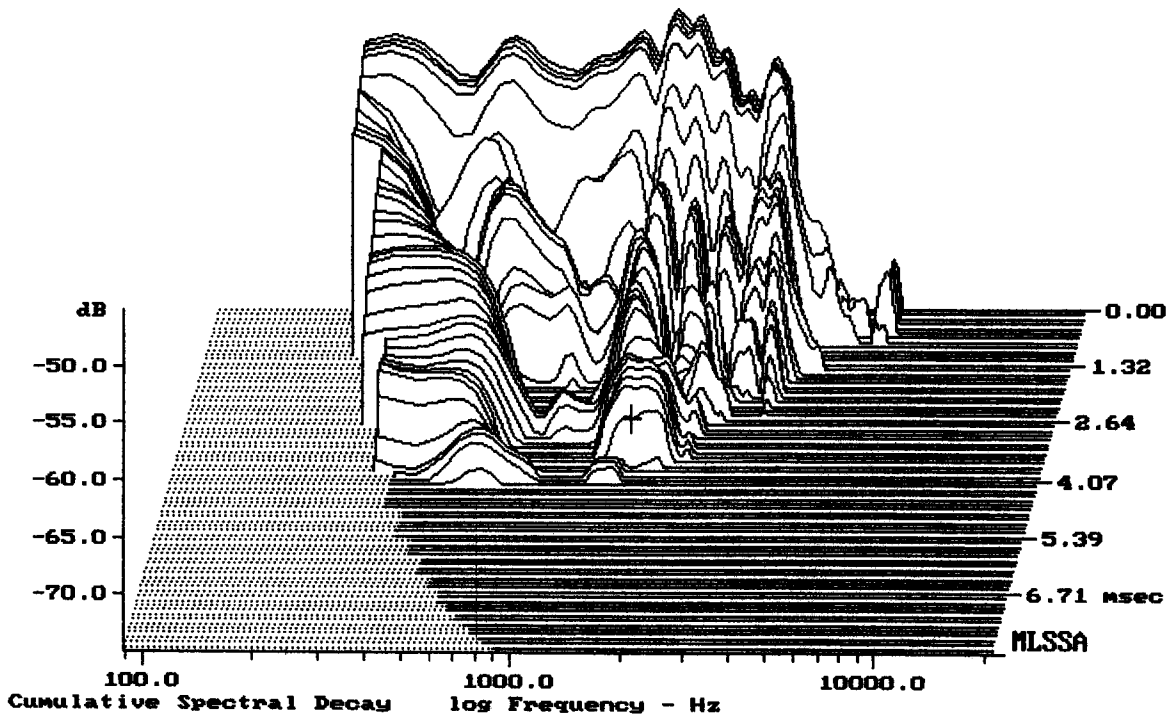

-71.17 dB, 1554 Hz (35), 3.638 msec (34)