

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.09	Ohms
2	Fs	82.32	Hz
3	Re	5.83	Ohms[dc]
4	Res	131.45	Ohms
5	Qms	4.87	
6	Qes	0.22	
7	Qts	0.21	
8	L1	0.51	mH
9	L2	1.62	mH
10	R2	5.34	Ohms
11	RMSE-load	0.98	Ohms
12	Vas(Sd)	21.10	liters
13	Mms	29.85	grams
14	Cms	125	$\mu\text{M}/\text{Newton}$
15	B1	20.42	Tesla-M
16	SPLref(Sd)	99.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.0% (-20% to -50% is recommended).

PDN.10MH25


MLSSA: Parameters

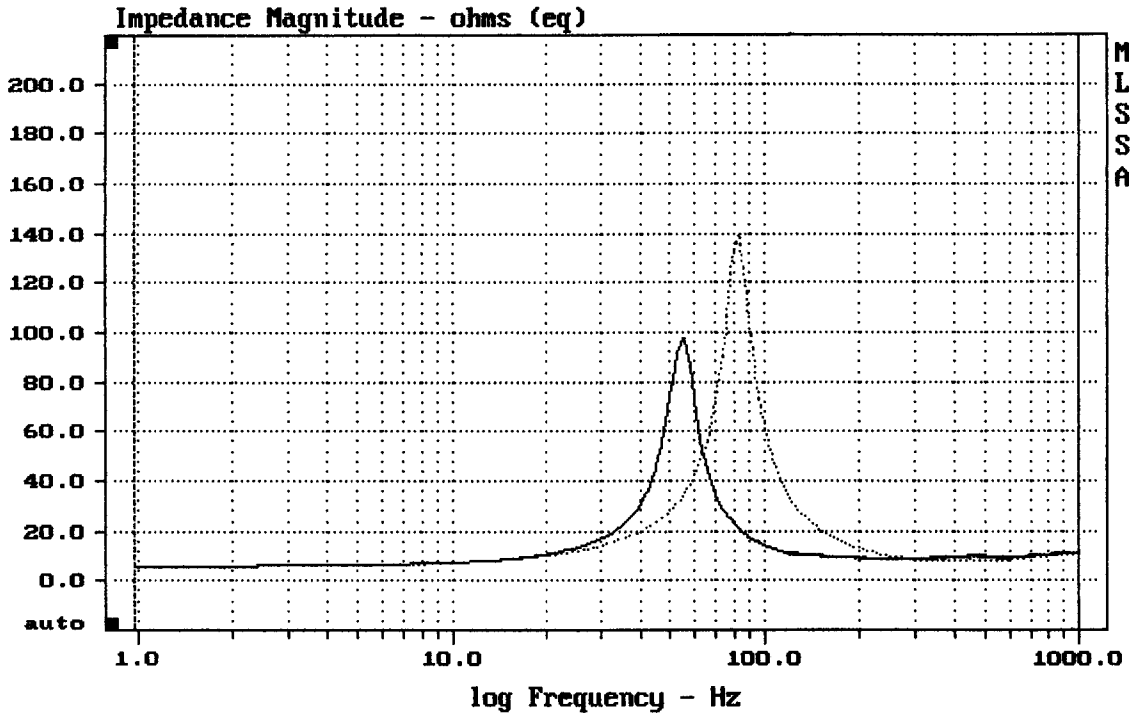

mean: 14.52, rms: 23.1, std: 17.97, max: 139.6, min: 5.925

DITO


MLSSA: Frequency Domain

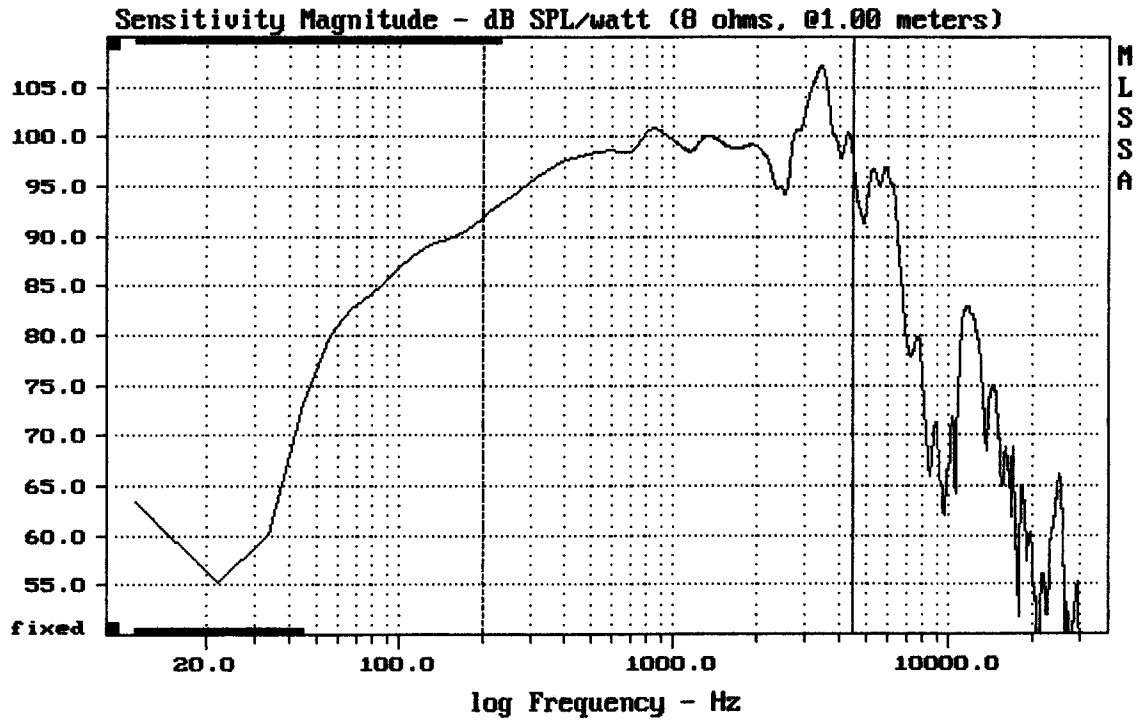

Level (200:4494 Hz) = 99.44 dB SPL/watt (8 ohms, @1.00 meters)

PDM.10MH25

MLSSA: Frequency Domain

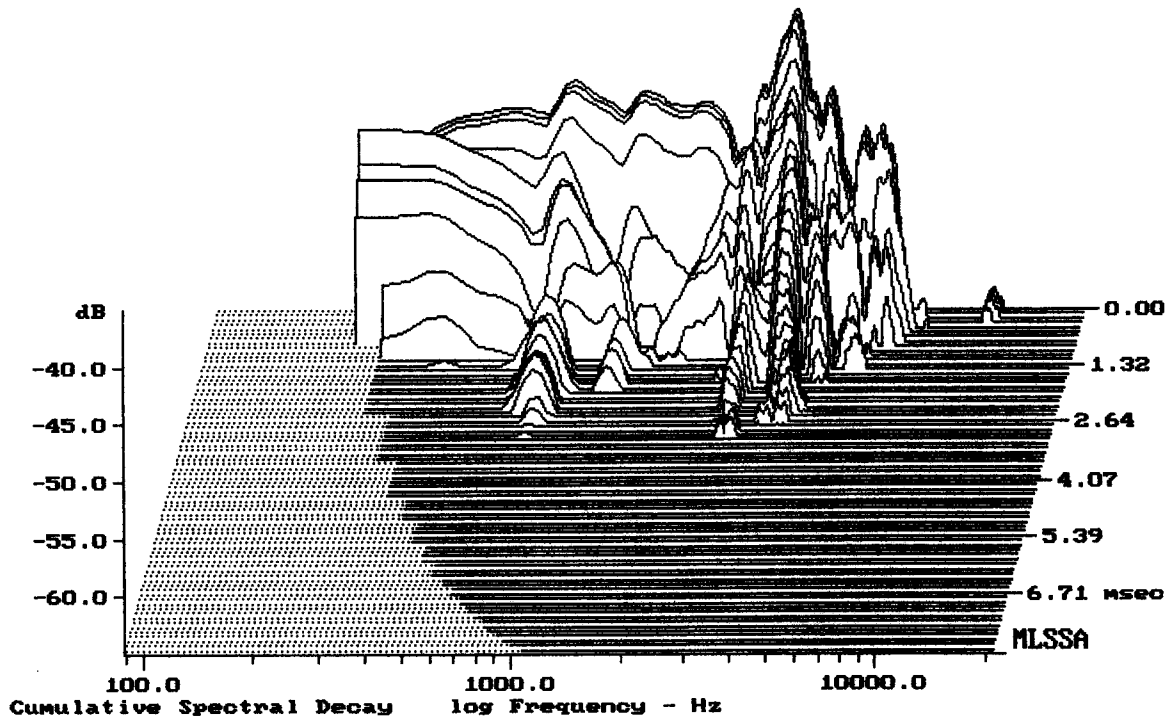

-64.08 dB, 2619 Hz (59), 2.860 msec (27)