

Measured Data			
Line	Parameter	Value	Units
1	RMSE-free	0.17	Ohms
2	Fs	44.81	Hz
3	Re	3.18	Ohms[dc]
4	Res	49.86	Ohms
5	Qms	6.63	
6	Qes	0.42	
7	Qts	0.40	
8	L1	0.70	mH
9	L2	0.69	mH
10	R2	2.18	Ohms
11	RMSE-load	0.28	Ohms
12	Vas(Sd)	79.55	liters
13	Mms	29.36	grams
14	Cms	430	$\mu\text{M}/\text{Newton}$
15	B1	7.89	Tesla-M
16	SPLref(Sd)	94.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 363.05 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.7% (-20% to -50% is recommended).


10" EMINENCE FROM AMPEG SVT-410 HLF

MLSSA: Parameters

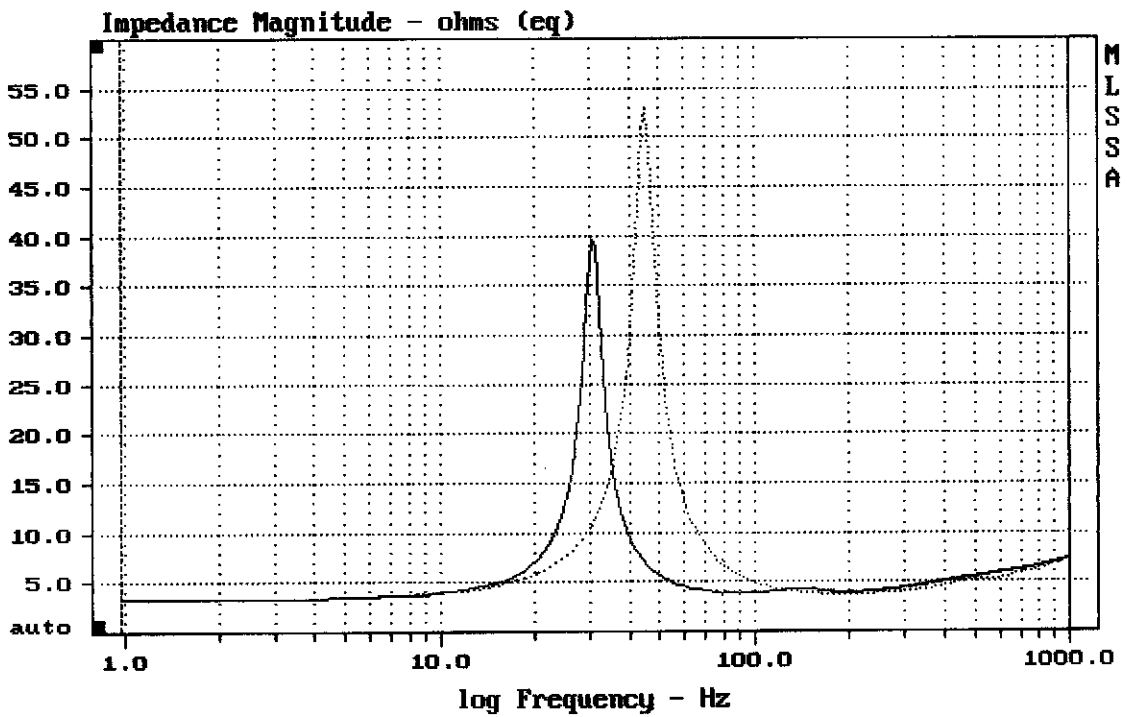

mean: 6.017, rms: 7.445, std: 4.385, max: 53.04, min: 3.245


MLSSA: Frequency Domain

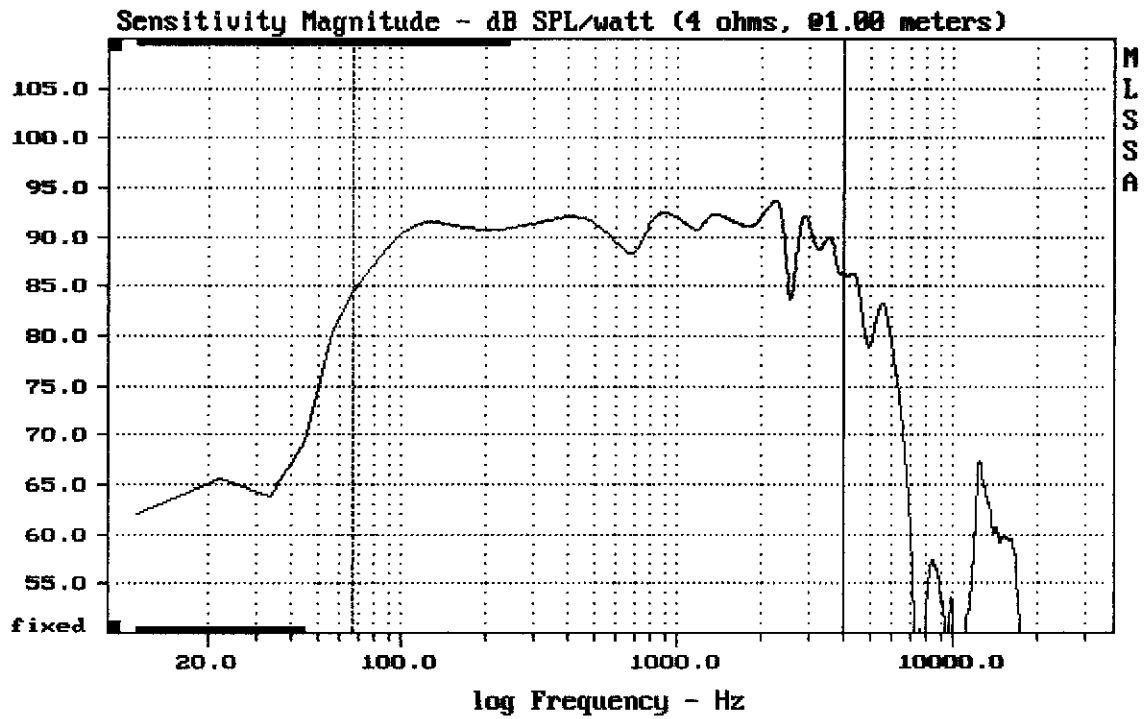


Level (67:3995 Hz) = 90.81 dB SPL/watt (4 ohms, @1.00 meters)

10" EMINENCE FROM AMPEG SVT-410 HLF

MLSSA: Frequency Domain

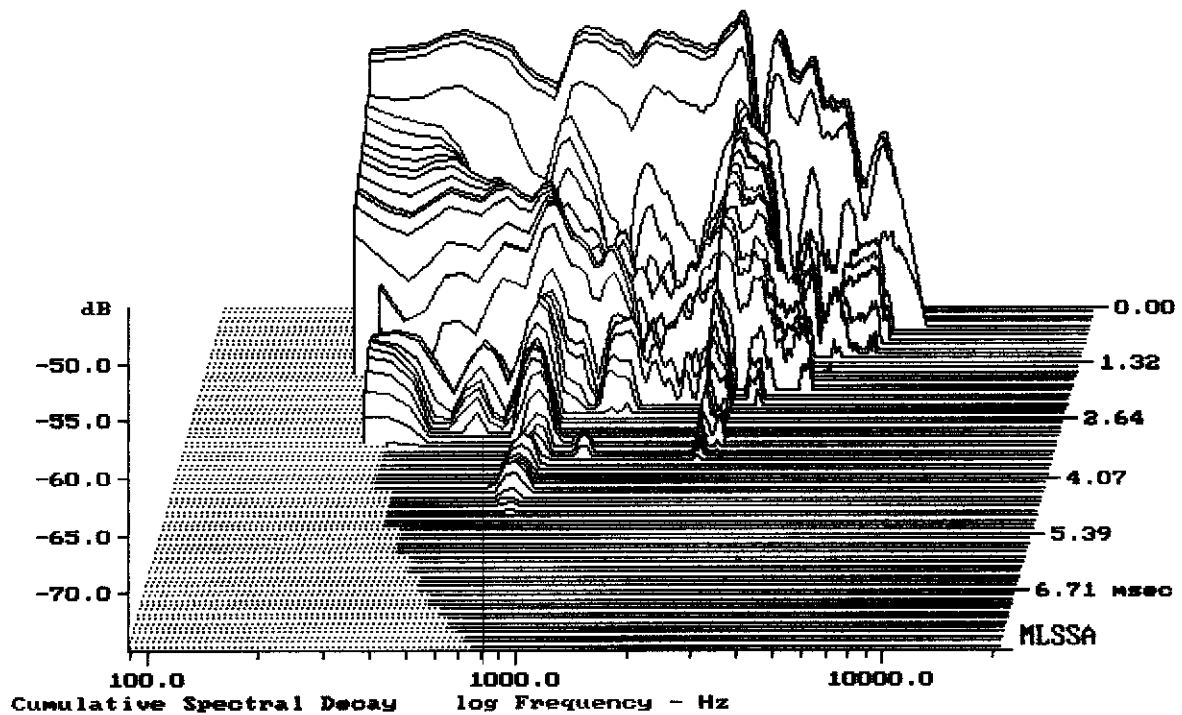


-73.36 dB, 2219 Hz (50), 3.520 msec (33)

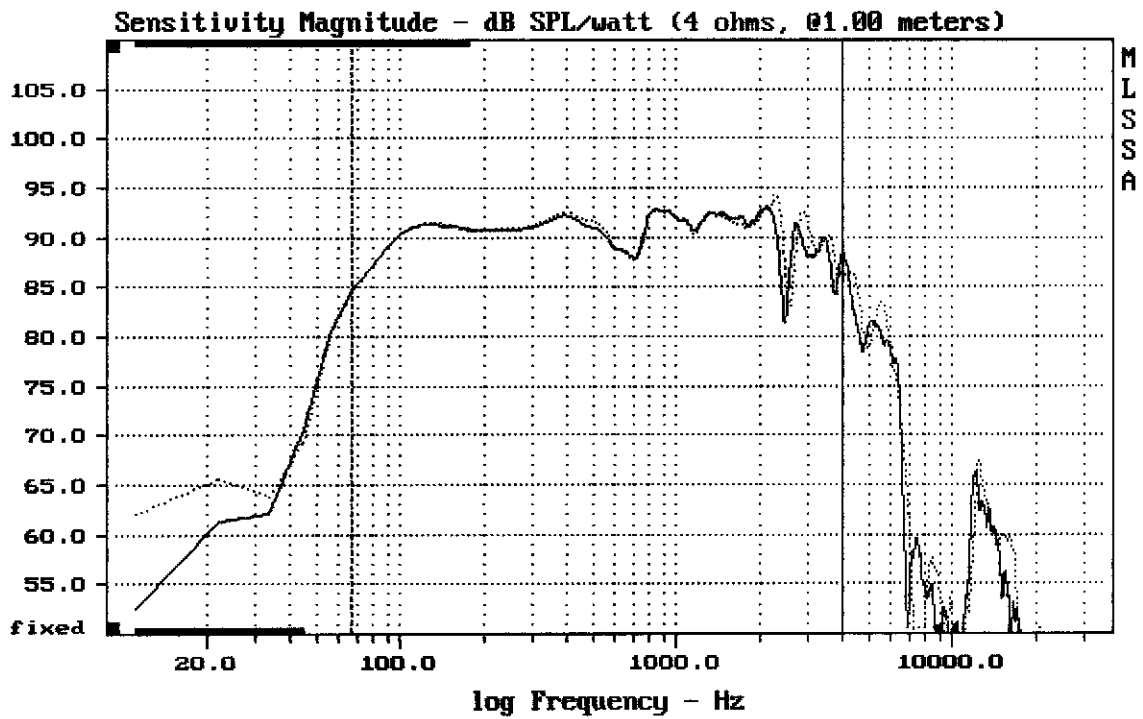

mean: 90.65, rms: 90.88, std: 1.82, max: 94.20, min: 83.18

10" Eminence from AMPEG SUT-418 HLF

MLSSA: Frequency Domain

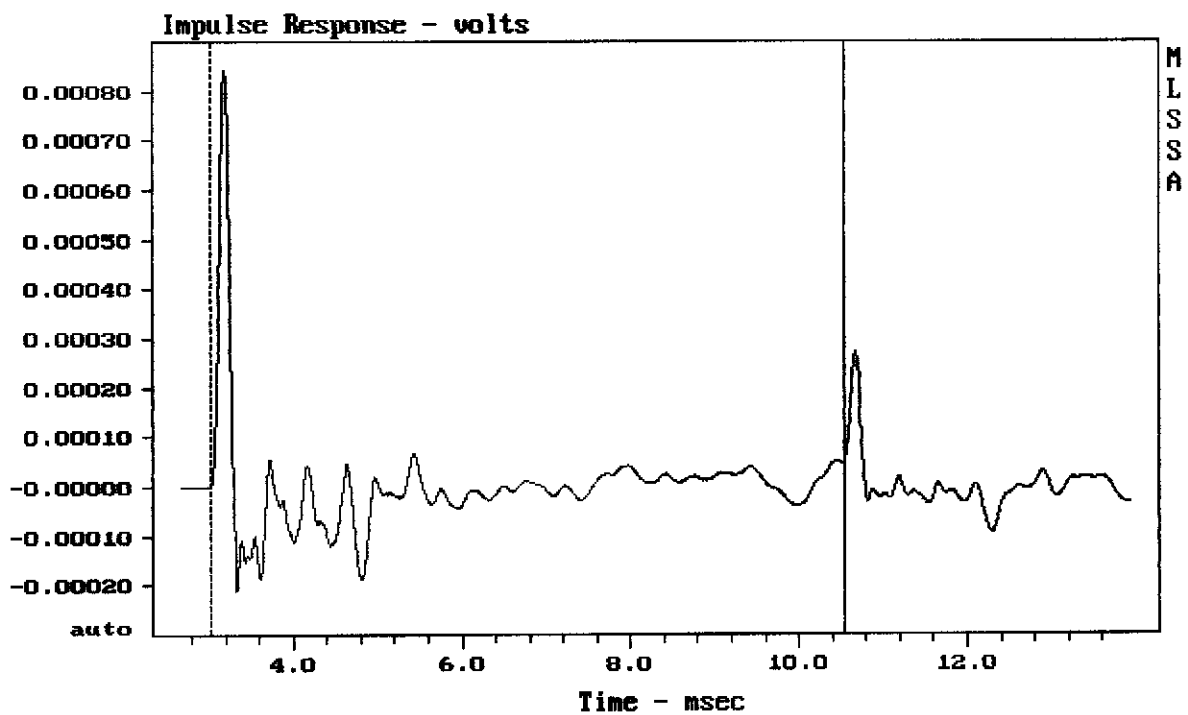

mean: 6.541e-007, rms: 0.0001073, std: 0.0001072, max: 0.0008402, min: -0.0002