

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.07	Ohms
2	Fs	42.81	Hz
3	Re	11.50	Ohms[dc]
4	Res	254.93	Ohms
5	Qms	6.75	
6	Qes	0.30	
7	Qts	0.29	
8	L1	1.77	mH
9	L2	2.73	mH
10	R2	12.37	Ohms
11	RMSE-load	1.55	Ohms
12	Vas(Sd)	69.28	liters
13	Mms	33.61	grams
14	Cms	411	$\mu\text{M}/\text{Newton}$
15	Bl	18.48	Tesla-M
16	SPLref(Sd)	94.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.0% (-20% to -50% is recommended).


G-K RBH210 EMINENCE

MLSSA: Parameters

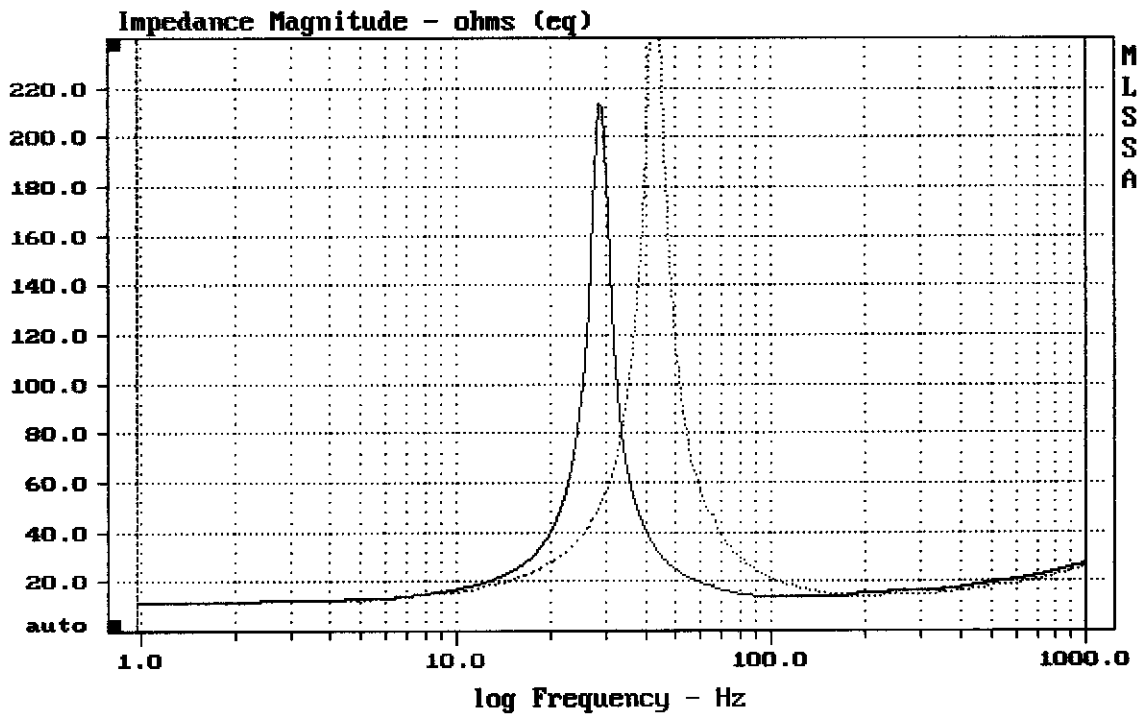

mean: 23.09, rms: 32.02, std: 22.18, max: 267.6, min: 11.57


MLSSA: Frequency Domain

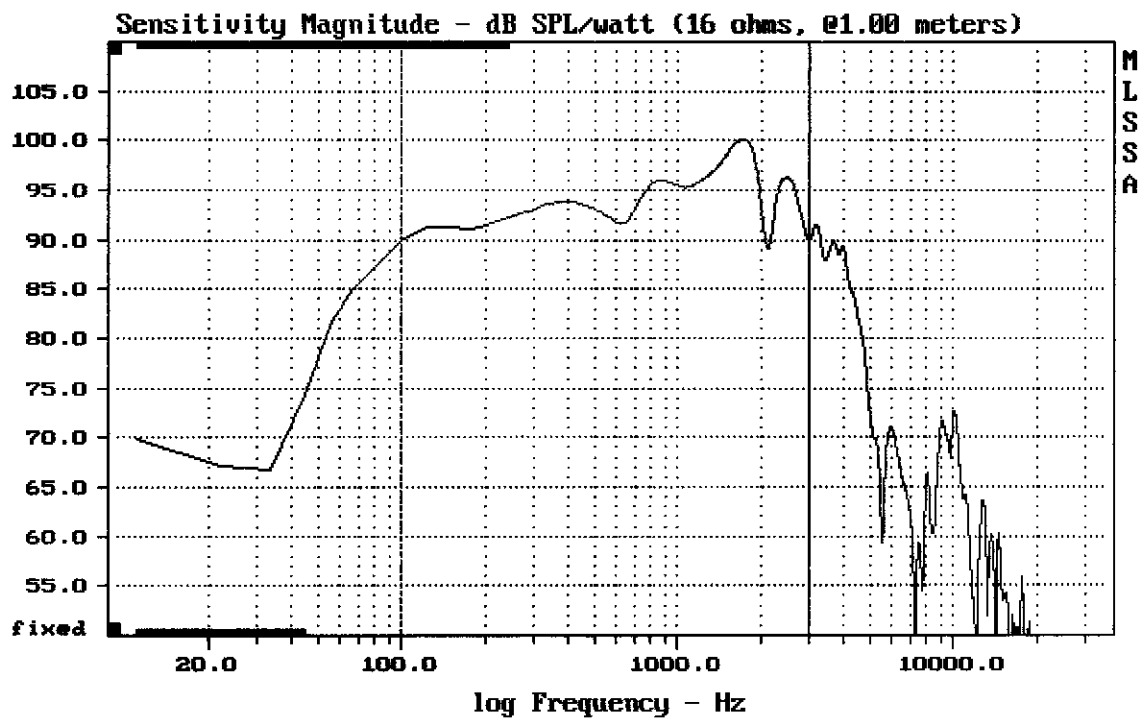

Level (100:2996 Hz) = 94.50 dB SPL/watt (16 ohms, @1.00 meters)

10" EMINENCE FROM G-K RBH210

MLSSA: Frequency Domain

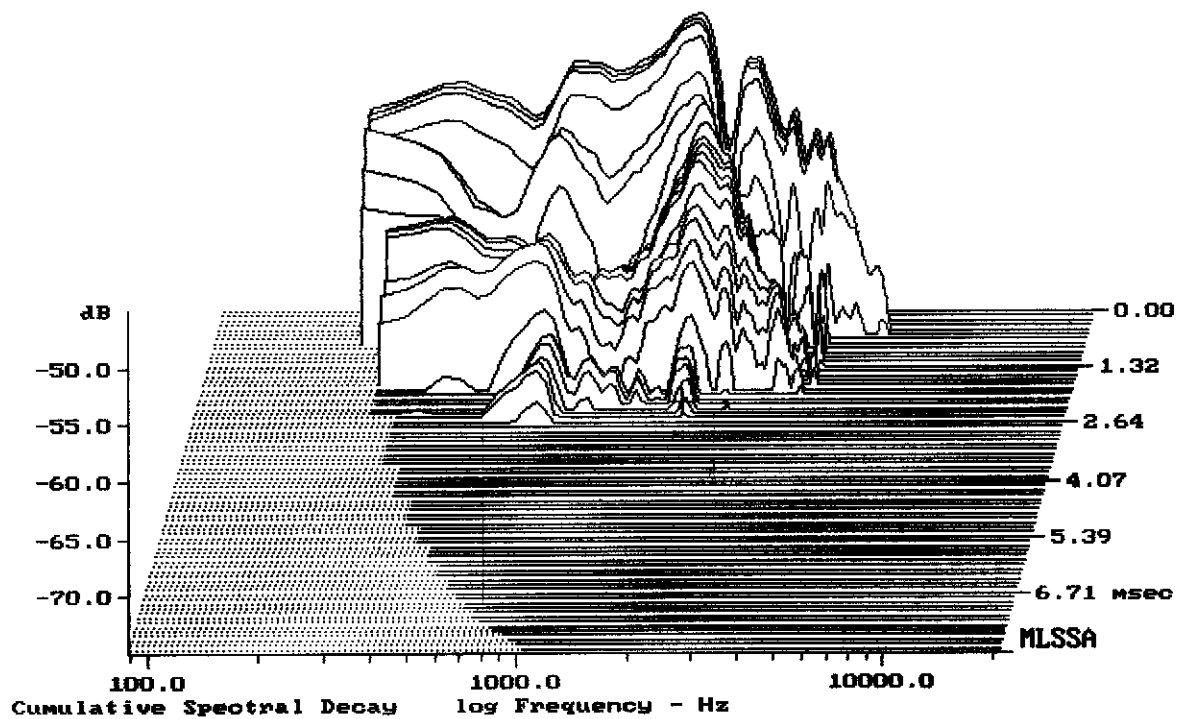

-74.03 dB, 1864 Hz (42), 2.420 msec (23)