

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.81	Ohms
2	Fs	40.96	Hz
3	Re	11.83	Ohms[dc]
4	Res	38.65	Ohms
5	Qms	2.11	
6	Qes	0.65	
7	Qts	0.50	
8	L1	0.47	mH
9	L2	1.17	mH
10	R2	8.97	Ohms
11	RMSE-load	0.57	Ohms
12	Vas(Sd)	94.31	liters
13	Mms	26.97	grams
14	Cms	560	$\mu\text{M}/\text{Newton}$
15	B1	11.26	Tesla-M
16	SPLref(Sd)	91.8	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.1% (-20% to -50% is recommended).


G-K SBX210 NO NAME CHINA YDD250-H5-2D

MLSSA: Parameters

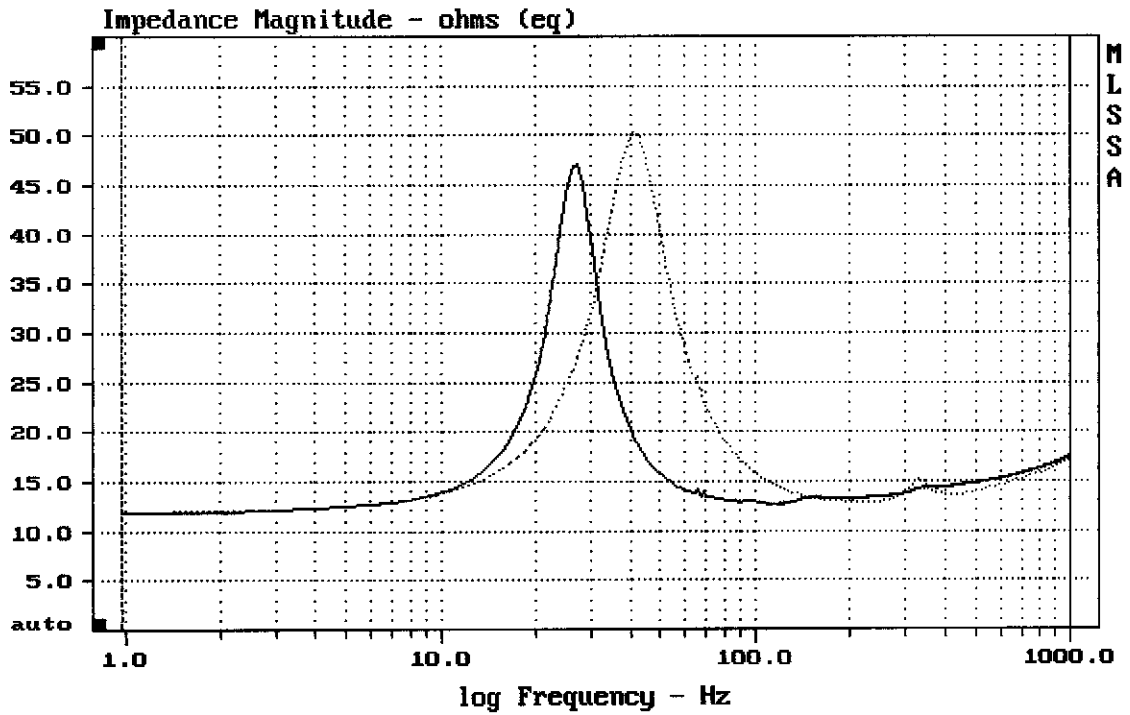

mean: 15.82, rms: 16.58, std: 4.966, max: 50.27, min: 11.92


MLSSA: Frequency Domain

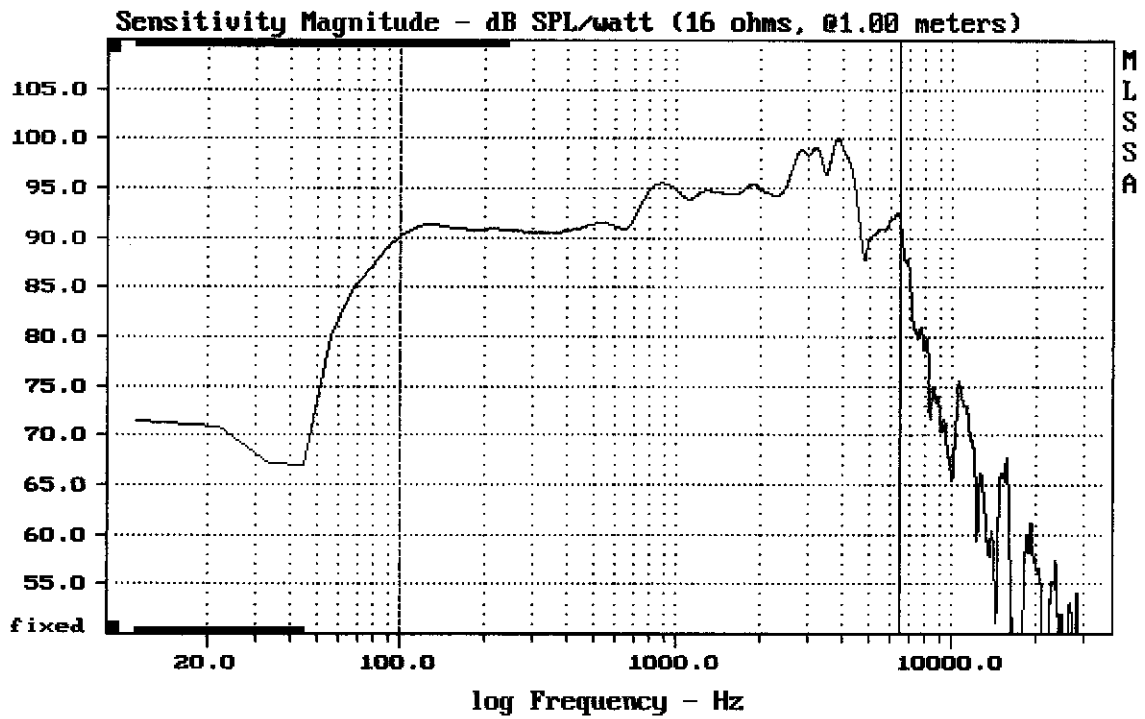

Level (100:6503 Hz) = 93.93 dB SPL/watt (16 ohms, @1.00 meters)

10" CHINA FROM G-K SBX210

MLSSA: Frequency Domain

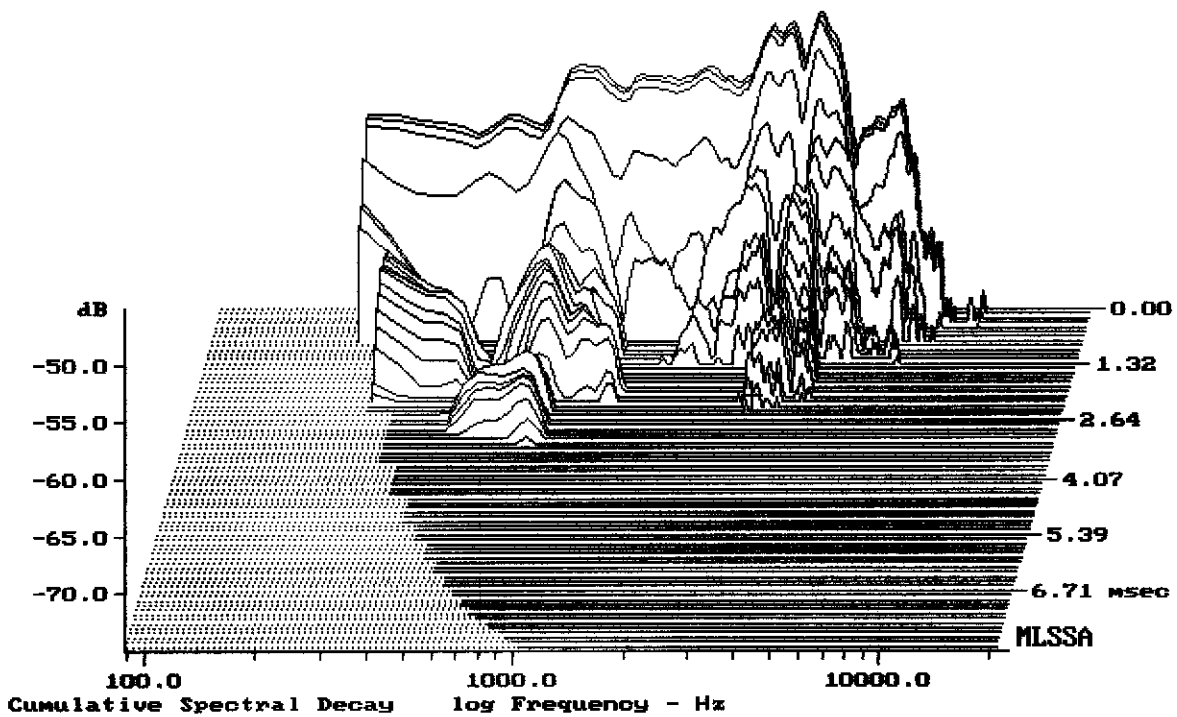

-74.05 dB, 2930 Hz (66), 2.310 msec (22)