

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.59	Ohms
2	Fs	64.39	Hz
3	Re	5.57	Ohms[dc]
4	Res	95.62	Ohms
5	Qms	5.71	
6	Qes	0.33	
7	Qts	0.31	
8	L1	0.83	mH
9	L2	1.37	mH
10	R2	3.79	Ohms
11	RMSE-load	1.39	Ohms
12	Vas(Sd)	35.89	liters
13	Mms	34.55	grams
14	Cms	177	$\mu\text{M}/\text{Newton}$
15	B1	15.30	Tesla-M
16	SPLref(Sd)	96.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 380.13 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.3% (-20% to -50% is recommended).


BEYMA 10G-200

MLSSA: Parameters

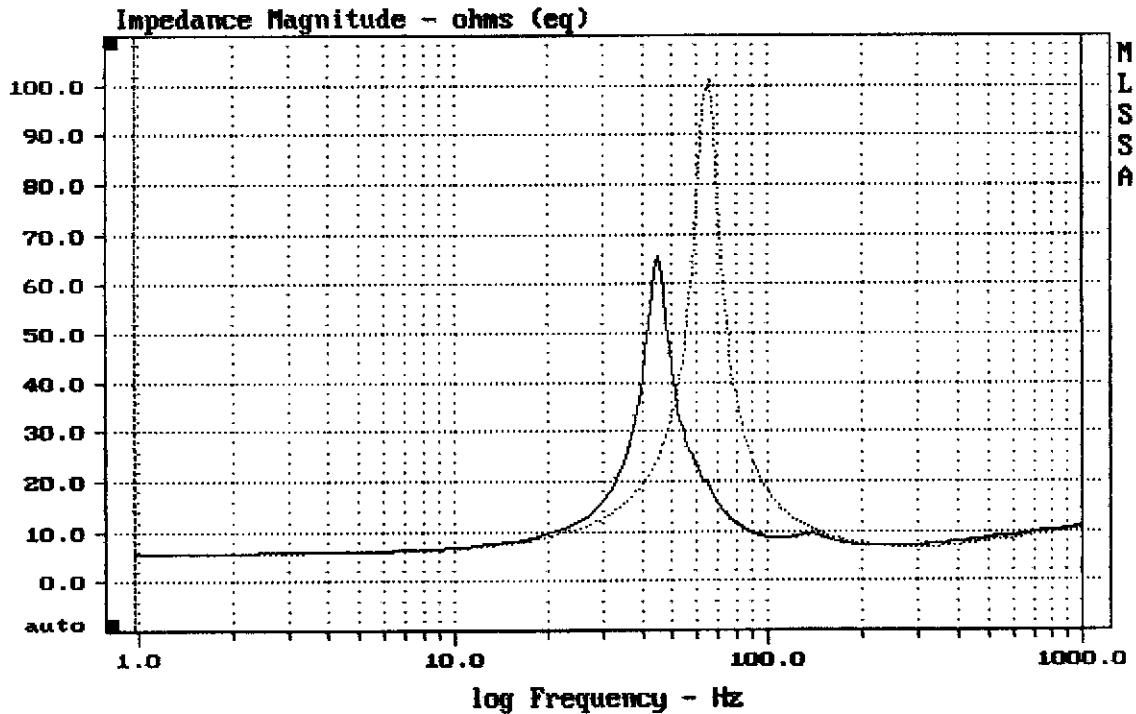

mean: 11.03, rms: 15.35, std: 10.60, max: 101.1, min: 5.674


MLSSA: Frequency Domain

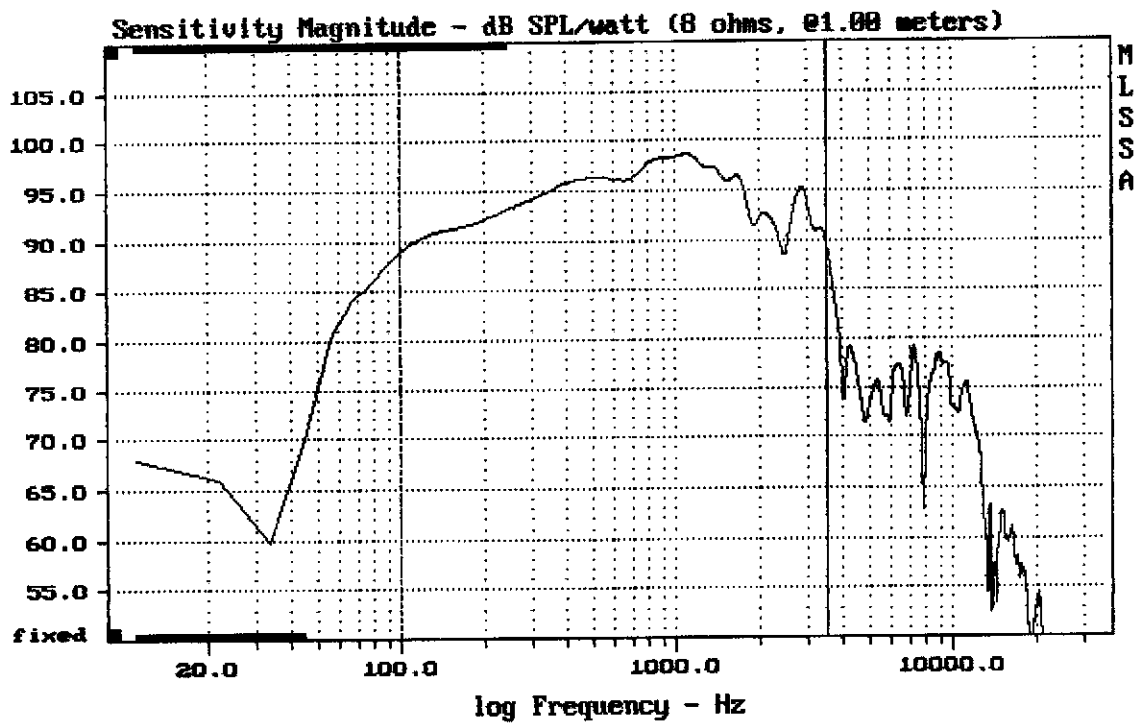

Level (100:3507 Hz) = 95.04 dB SPL/watt (8 ohms, @1.00 meters)

BEYMA 10G-200

MLSSA: Frequency Domain

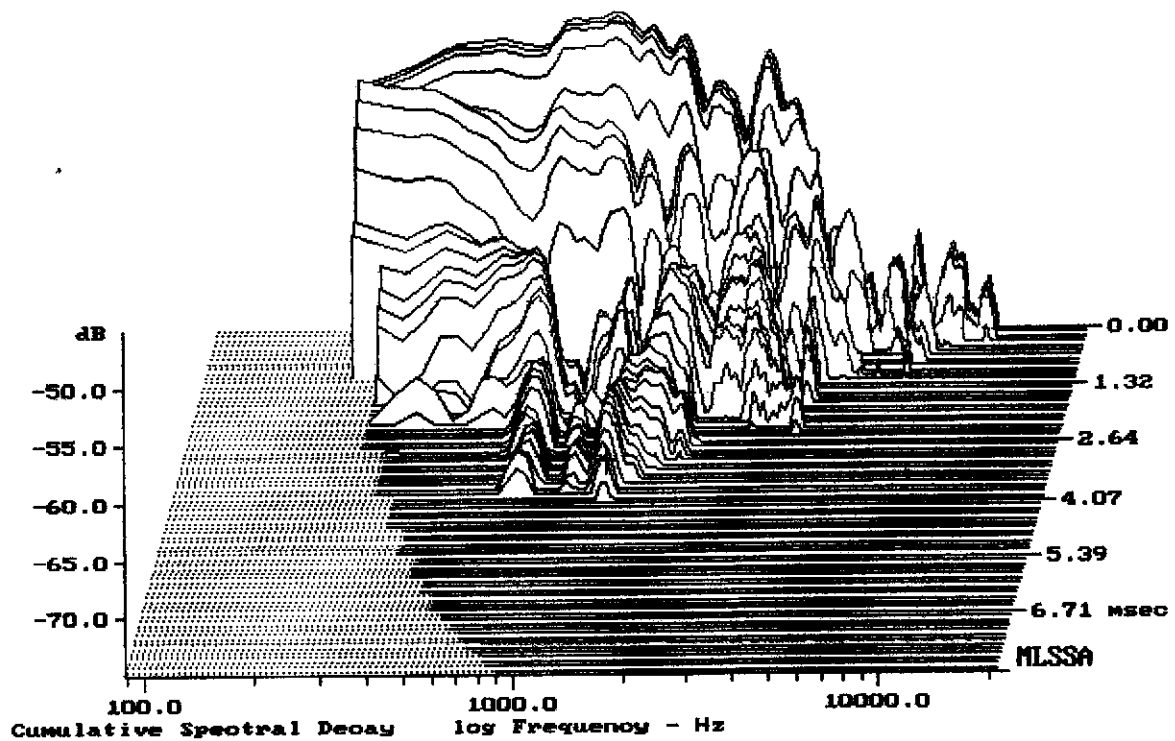

-72.13 dB, 1332 Hz (30), 3.850 msec (36)