

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.53	Ohms
2	Fs	72.01	Hz
3	Re	5.44	Ohms[dc]
4	Res	75.65	Ohms
5	Qms	4.98	
6	Qes	0.36	
7	Qts	0.33	
8	L1	0.60	mH
9	L2	1.17	mH
10	R2	6.07	Ohms
11	RMSE-load	1.84	Ohms
12	Vas(Sd)	31.14	liters
13	Mms	26.43	grams
14	Cms	185	$\mu\text{M}/\text{Newton}$
15	B1	13.48	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.4% (-20% to -50% is recommended).


FANE M4-10

MLSSA: Parameters

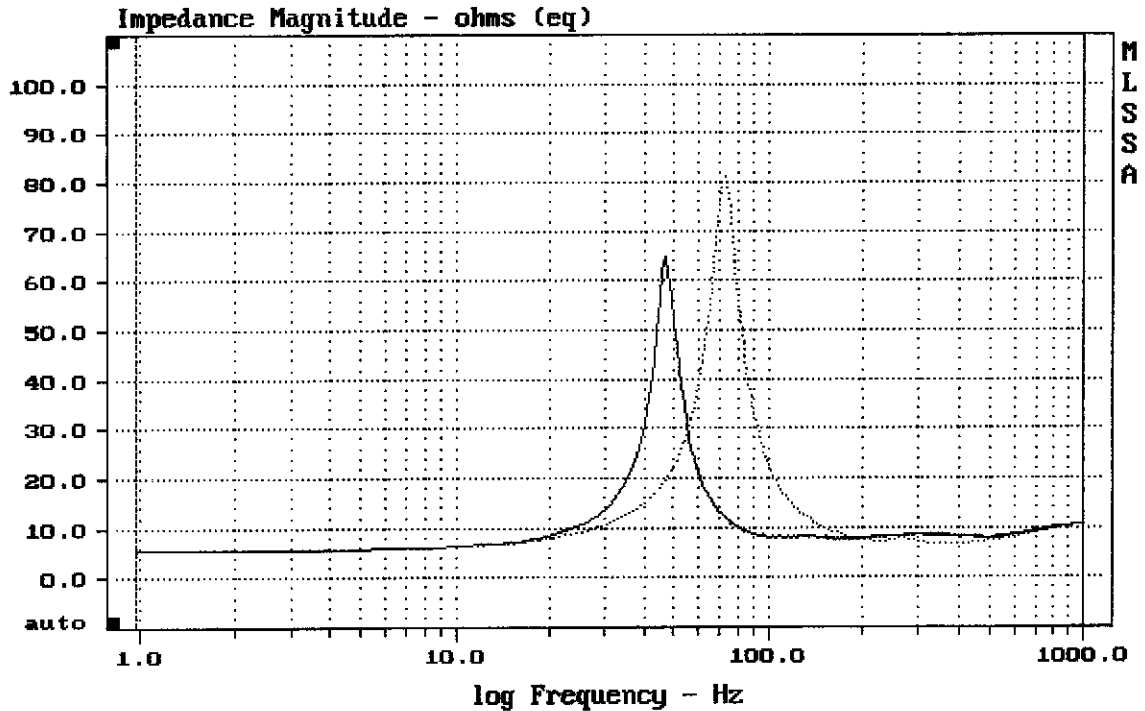

mean: 10.75, rms: 14.26, std: 9.372, max: 81.36, min: 5.483


MLSSA: Frequency Domain

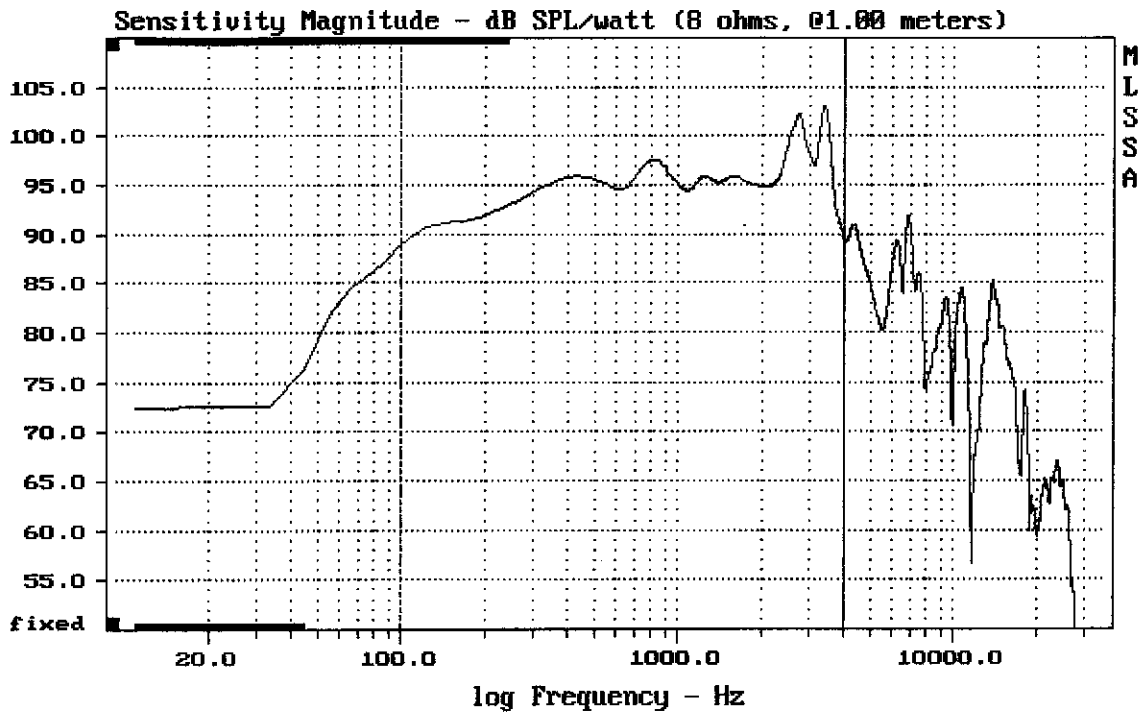

Level (100:3995 Hz) = 95.68 dB SPL/watt (8 ohms, @1.00 meters)

FANE M4-10

MLSSA: Frequency Domain

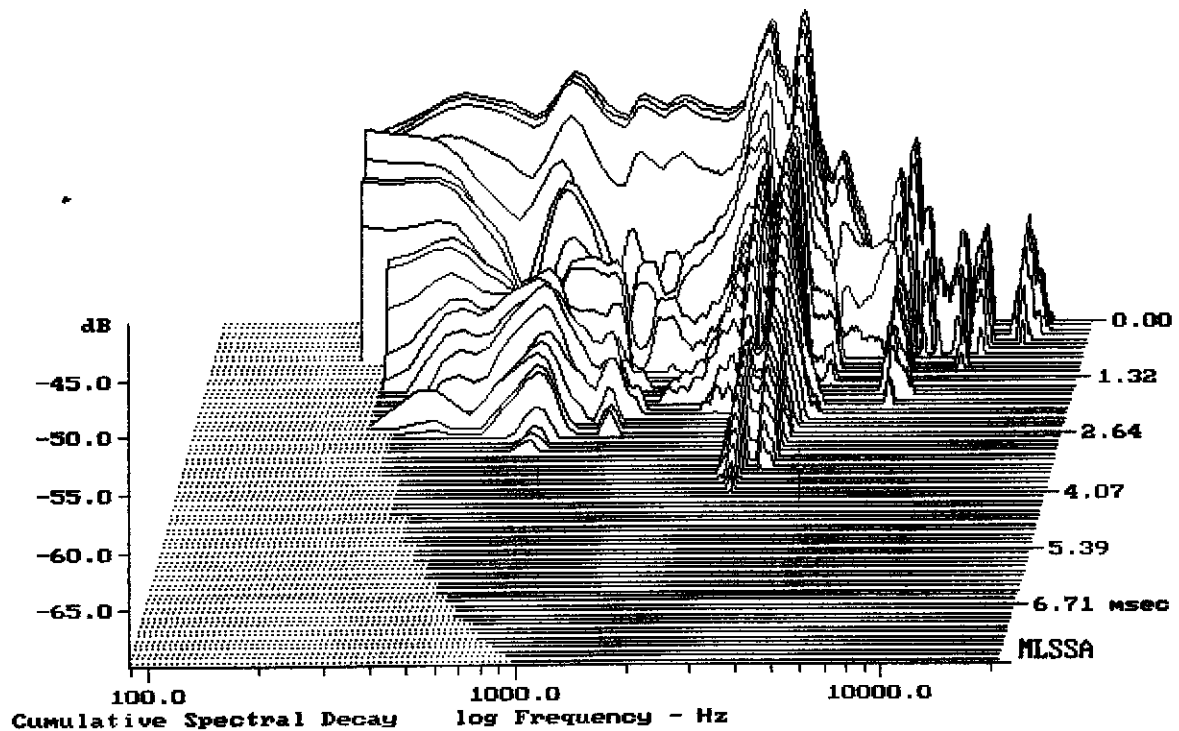

-69.05 dB, 2841 Hz (64), 3.960 msec (37)