


Level (100:4006 Hz) = 94.94 dB SPL/watt (8 ohms, @1.00 meters)

2x CLA10-200

MLSSA: Frequency Domain

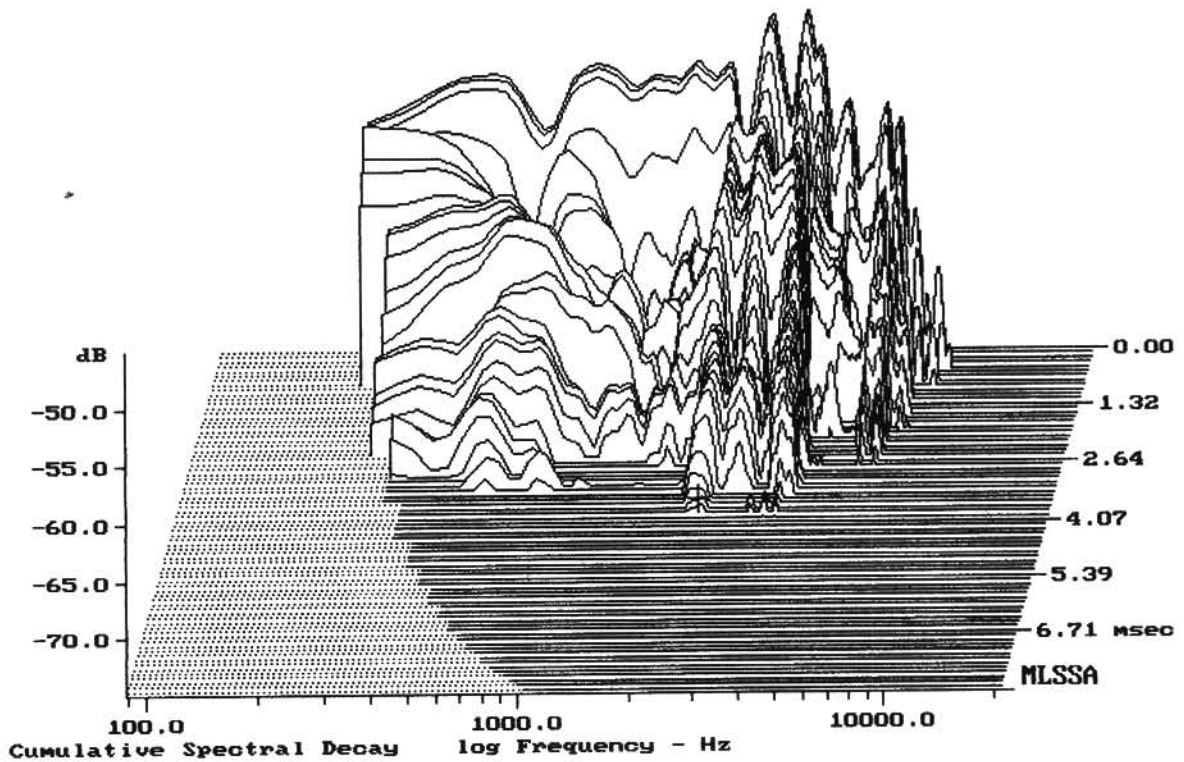

-74.15 dB, 2264 Hz (51), 3.740 msec (35)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.37	Ohms
2	Fs	50.18	Hz
3	Re	5.63	Ohms[dc]
4	Res	118.19	Ohms
5	Qms	8.77	
6	Qes	0.42	
7	Qts	0.40	
8	L1	0.69	mH
9	L2	0.66	mH
10	R2	2.46	Ohms
11	RMSE-load	0.78	Ohms
12	Vas(Sd)	48.59	liters
13	Mms	35.63	grams
14	Cms	282	$\mu\text{M}/\text{Newton}$
15	B1	12.30	Tesla-M
16	SPLref(Sd)	93.5	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 350.00 sq cm

DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.7% (-20% to -50% is recommended).

CLA10-200

MLSSA: Parameters

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	49.60	Hz
3	Re	5.27	Ohms[dc]
4	Res	116.77	Ohms
5	Qms	8.79	
6	Qes	0.40	
7	Qts	0.38	
8	L1	0.64	mH
9	L2	0.64	mH
10	R2	2.26	Ohms
11	RMSE-load	0.58	Ohms
12	Vas(Sd)	46.81	liters
13	Mms	37.85	grams
14	Cms	272	$\mu\text{M}/\text{Newton}$
15	B1	12.52	Tesla-M
16	SPLref(Sd)	93.4	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 350.00 sq cm

DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.0% (-20% to -50% is recommended).

CLA10-200

MLSSA: Parameters