


Level (100:8001 Hz) = 97.89 dB SPL/watt (8 ohms, @1.00 meters)

L10-581K FROM ELITE EM168

MLSSA: Frequency Domain

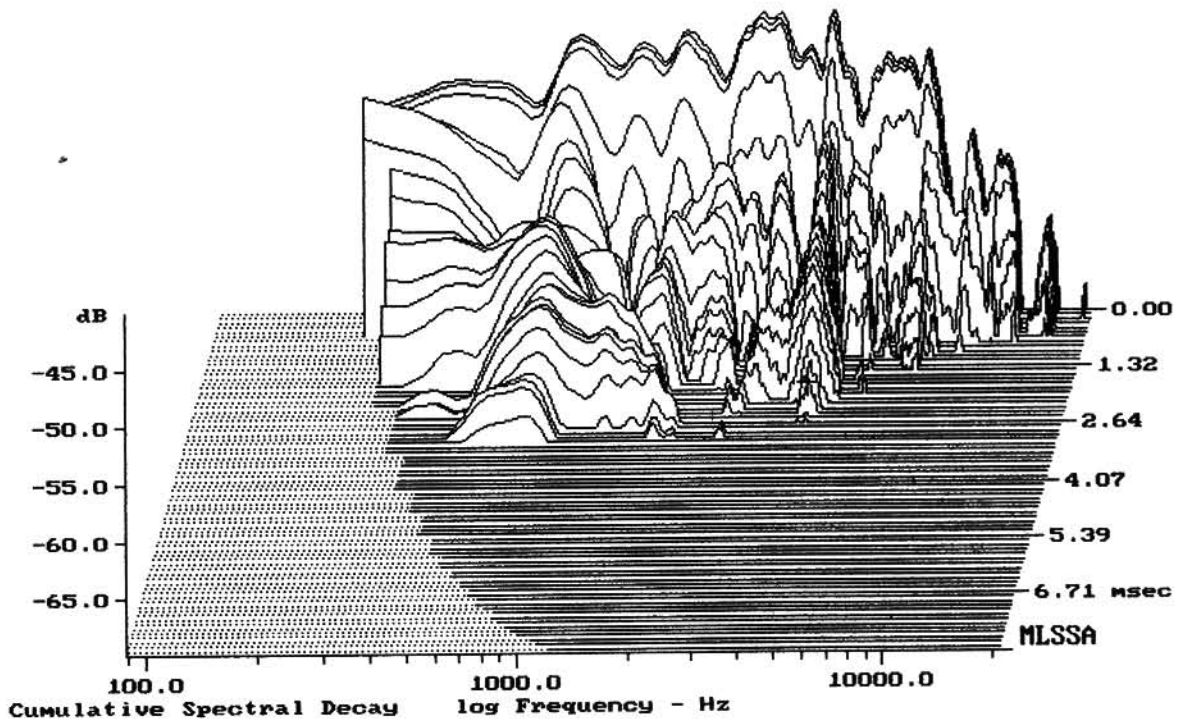

-67.24 dB, 4128 Hz (93), 2.420 msec (23)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.36	Ohms
2	Fs	85.40	Hz
3	Re	5.23	Ohms[dc]
4	Res	83.99	Ohms
5	Qms	7.36	
6	Qes	0.46	
7	Qts	0.43	
8	L1	0.14	mH
9	L2	1.11	mH
10	R2	5.46	Ohms
11	RMSE-load	0.65	Ohms
12	Vas(Sd)	25.95	liters
13	Mms	22.55	grams
14	Cms	154	$\mu\text{M}/\text{Newton}$
15	Bl	11.75	Tesla-M
16	SPLref(Sd)	97.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -38.3% (-20% to -50% is recommended).

L10-581K FROM ELITE EM168

MLSSA: Parameters

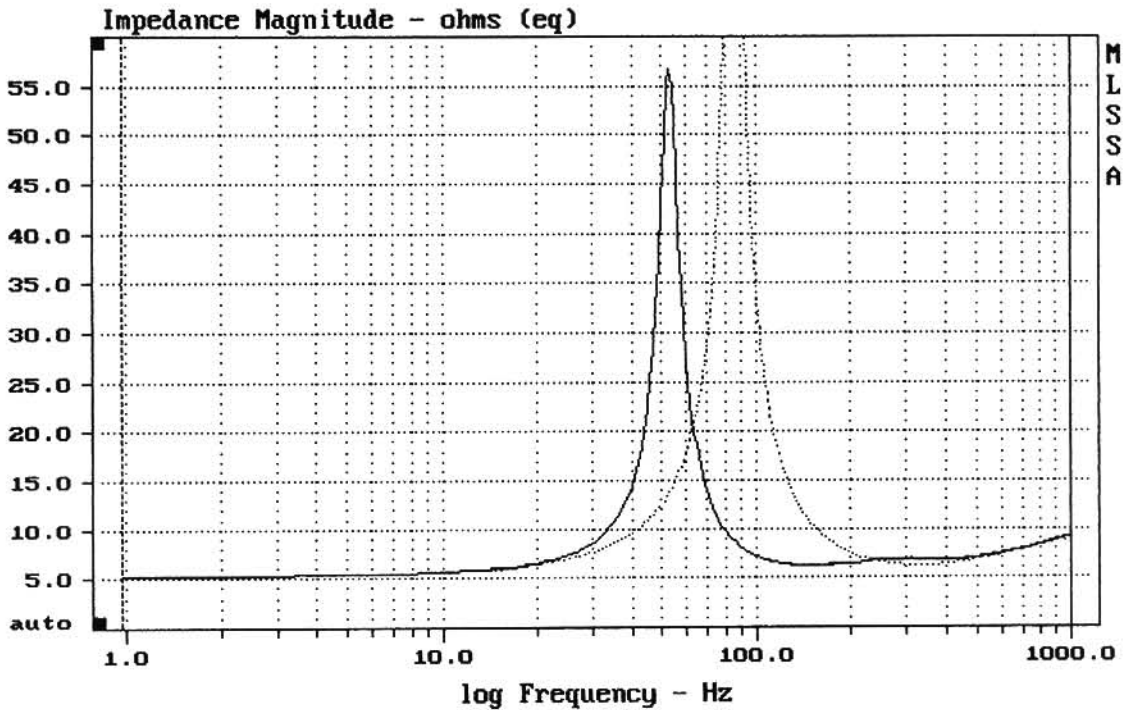

mean: 9.779, rms: 13.69, std: 9.587, max: 88.89, min: 5.298

MLSSA: Frequency Domain