



---

Level (42:197 Hz) = 104.98 dB SPL/watt (4 ohms, @4.00 meters)

---

RCF UMAX V218

MLSSA: Frequency Domain

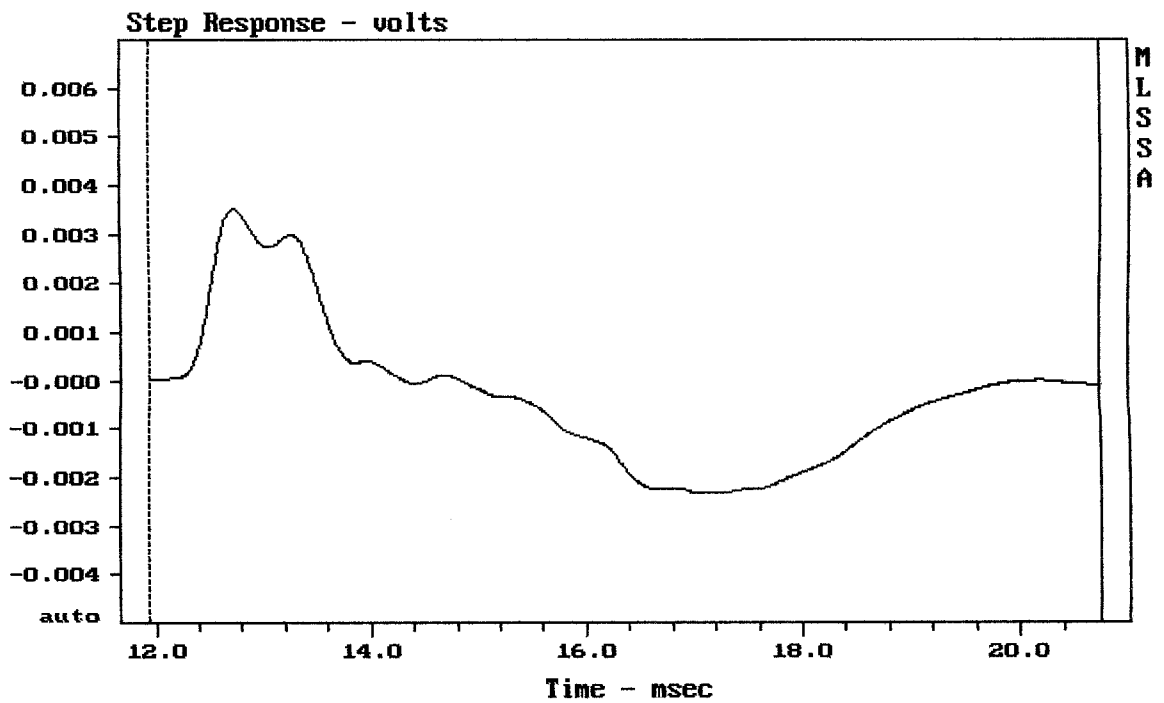



---

CURSOR:  $y = -7.79579e-005$   $x = 20.7460$  (1886)

---

RCF UMAX V218


MLSSA: Time Domain

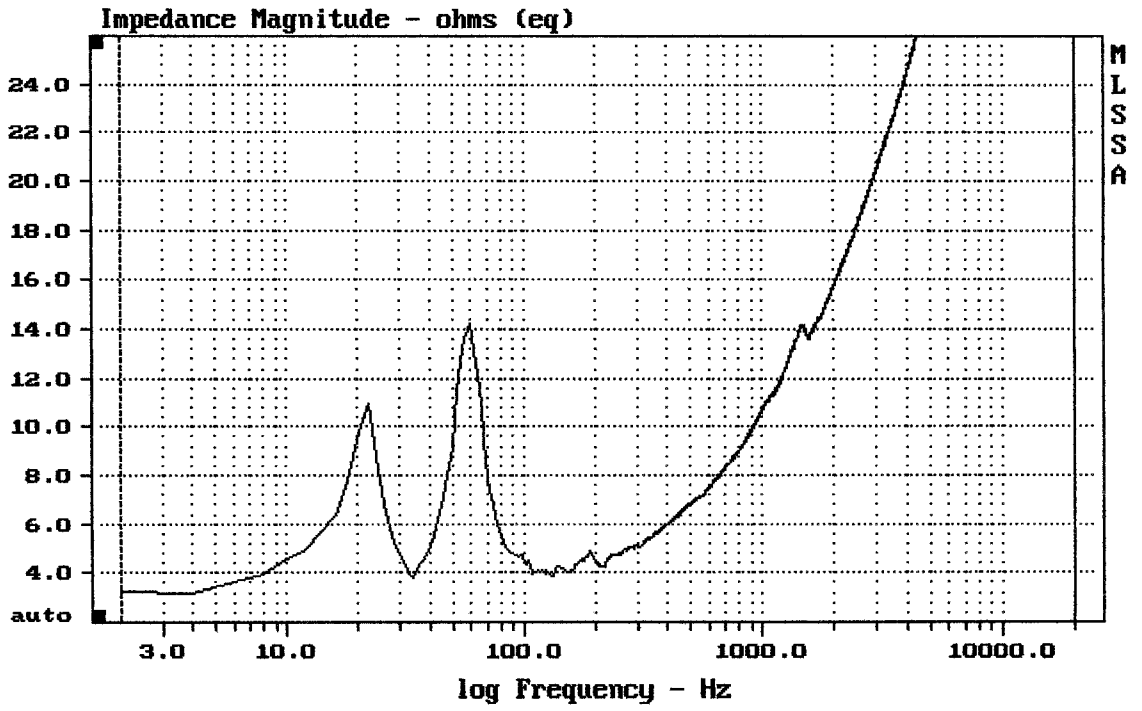


mean: 40.06, rms: 43.2, std: 16.15, max: 64.2, min: 3.193

RCF UMAX U218

MLSSA: Frequency Domain

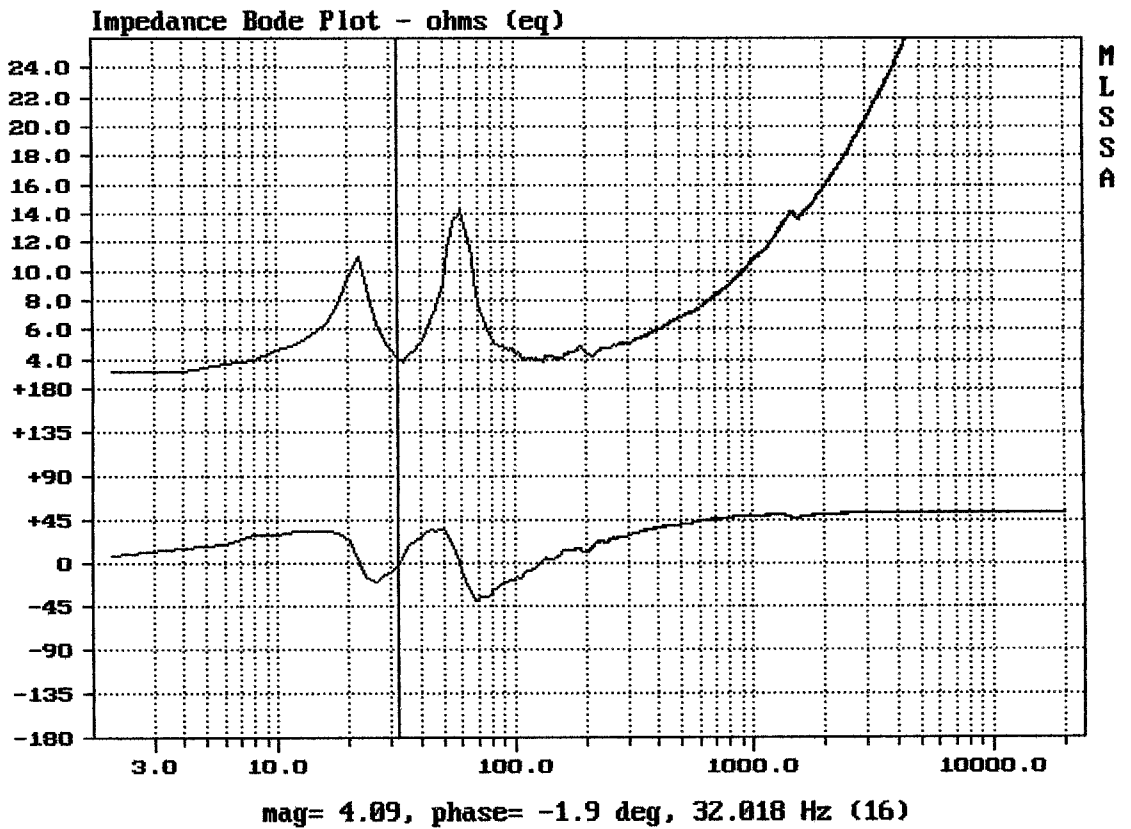


DTTO

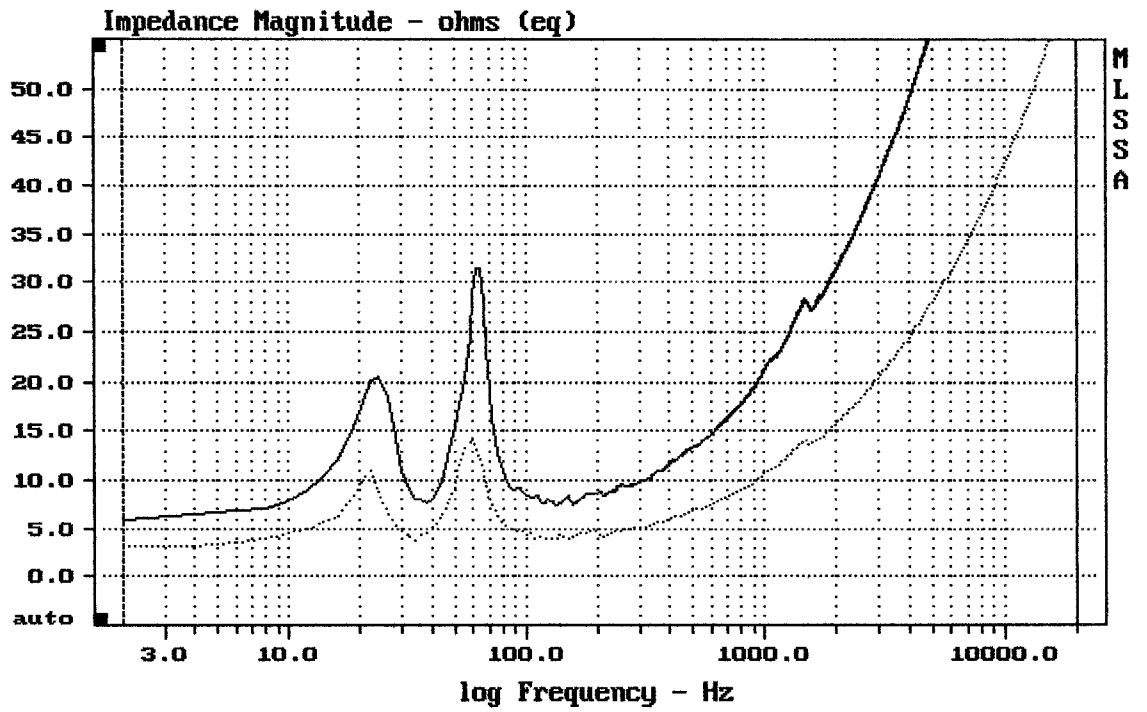

Overlay Compare: dev= +27/-38, std= 17, avg= 41

RCF UMAX UZ18 cela ... / polovina ----

MLSSA: Frequency Domain

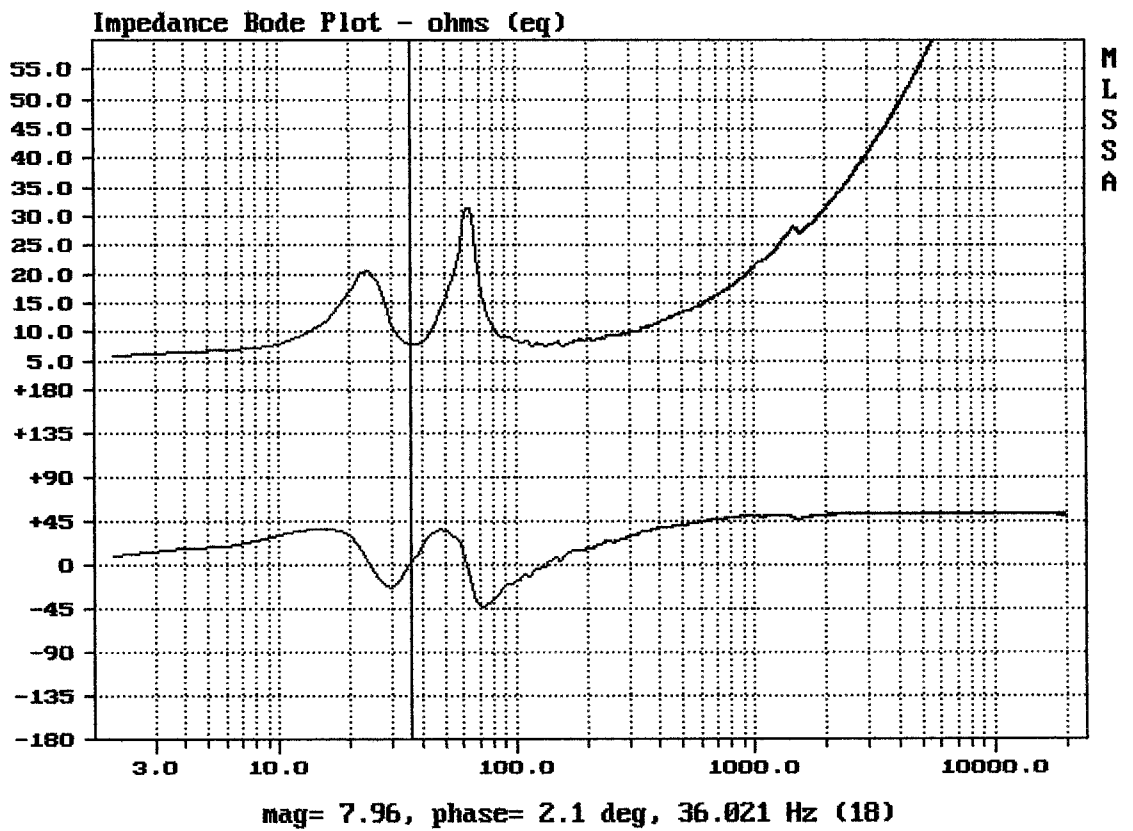

RCF UMAX UZ18 polovina

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.70	Ohms
2	Fs	37.45	Hz
3	Re	5.61	Ohms[dc]
4	Res	78.21	Ohms
5	Qms	5.81	
6	Qes	0.42	
7	Qts	0.39	
8	L1	1.86	mH
9	L2	2.61	mH
10	R2	10.55	Ohms
11	RMSE-load	0.68	Ohms
12	Vas(Sd)	195.60	liters
13	Mms	194.74	grams
14	Cms	93	$\mu\text{M}/\text{Newton}$
15	B1	24.83	Tesla-M
16	SPLref(Sd)	95.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1225.42 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.8% (-20% to -50% is recommended).

RCF V218-S

MLSSA: Parameters

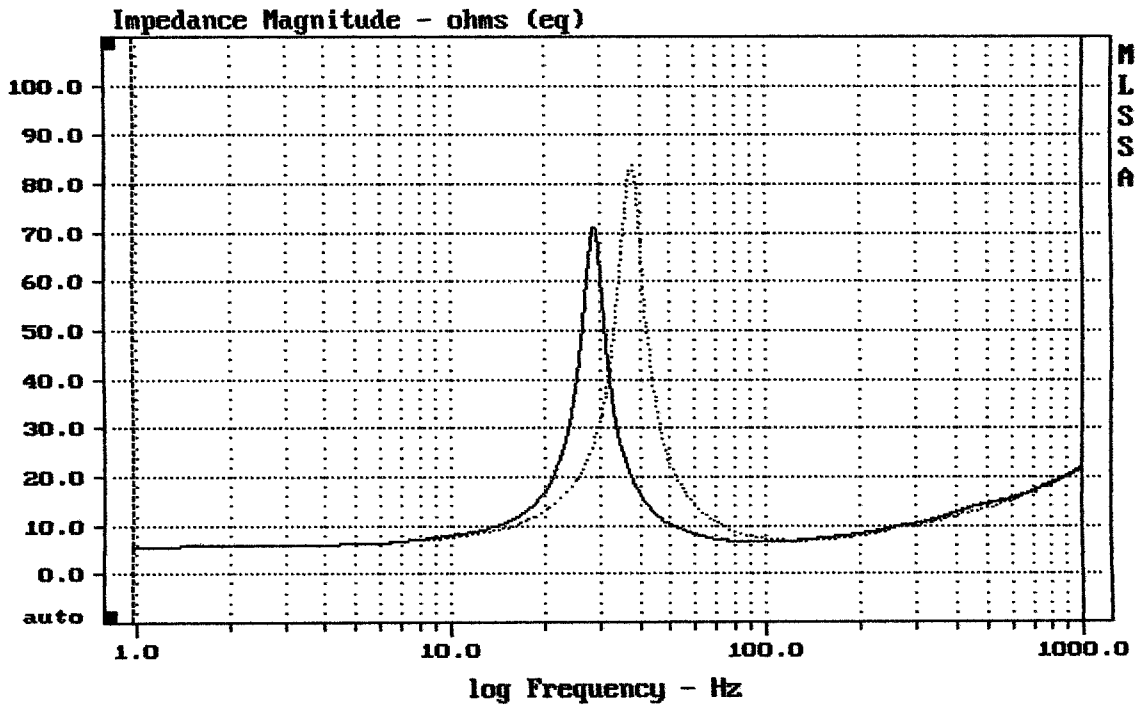

mean: 14.75, rms: 16.43, std: 7.247, max: 83.87, min: 5.659

MLSSA: Frequency Domain