


Level (89:20000 Hz) = 90.96 dB SPL/watt (8 ohms, @1.75 meters)

FOCUX C-8


MLSSA: Frequency Domain

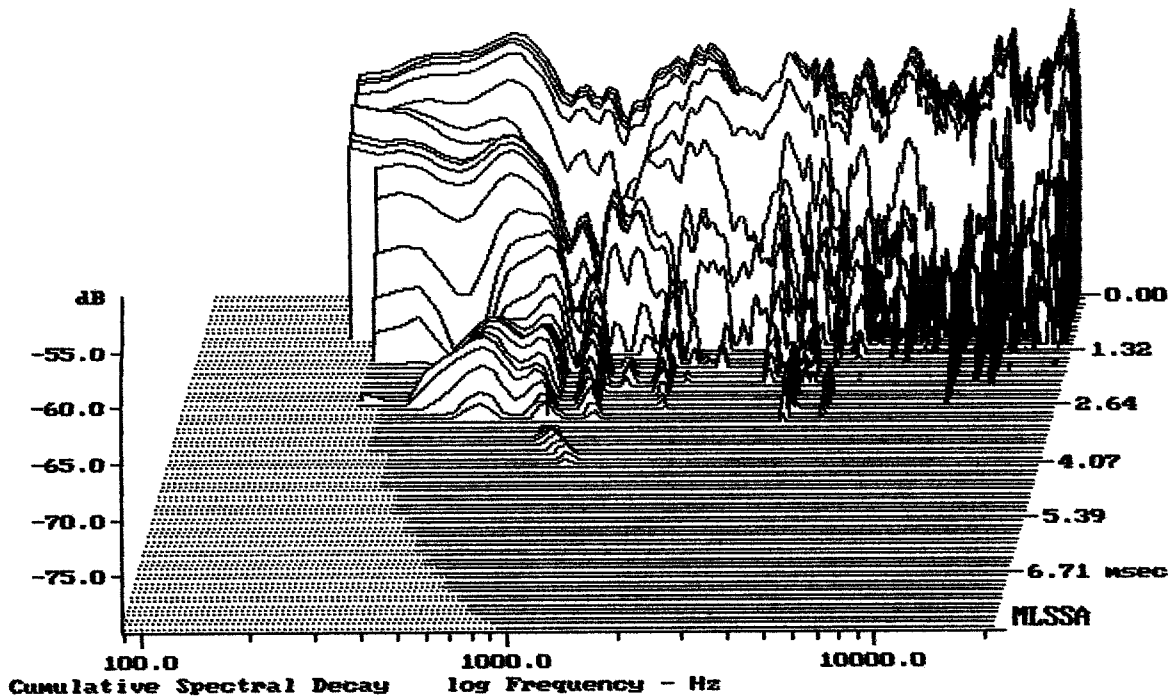

-78.53 dB, 888 Hz (20), 2.970 msec (28)

DTTO

Step Response - volts

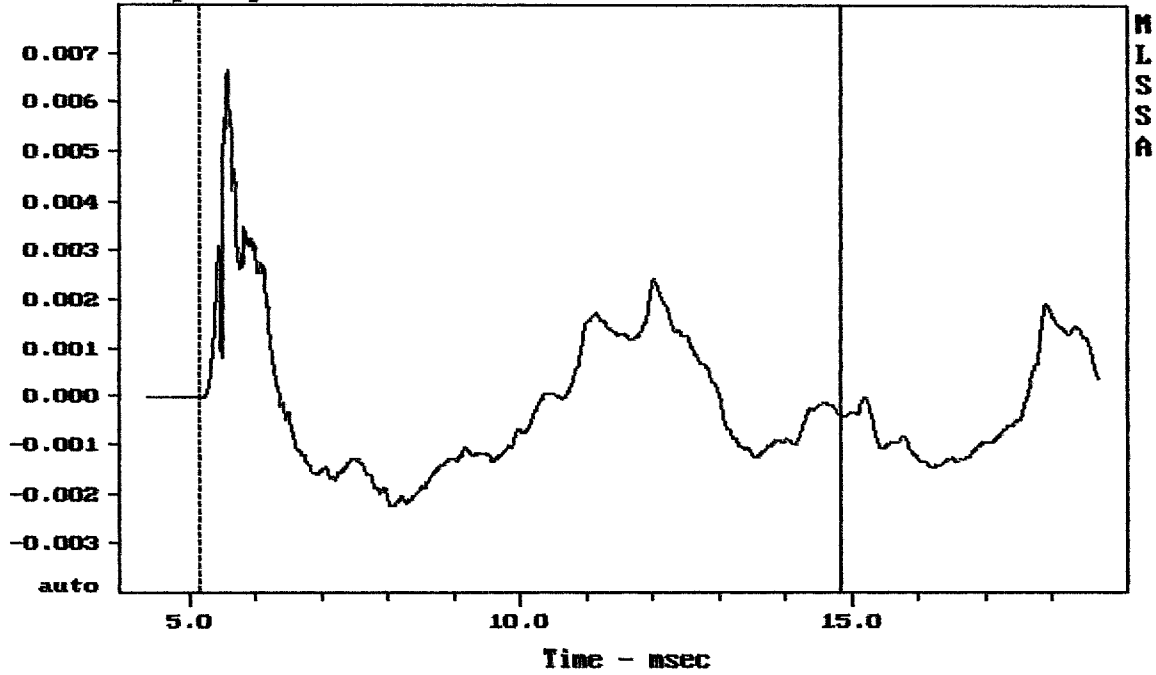


mean: -0.0001076, rms: 0.001587, std: 0.001583, max: 0.006636, min: -0.002266

FOCUX C-8

MLSSA: Time Domain


Sensitivity Mag - dB SPL/watt (8 ohms, @1.75 meters) (0.33 oct)

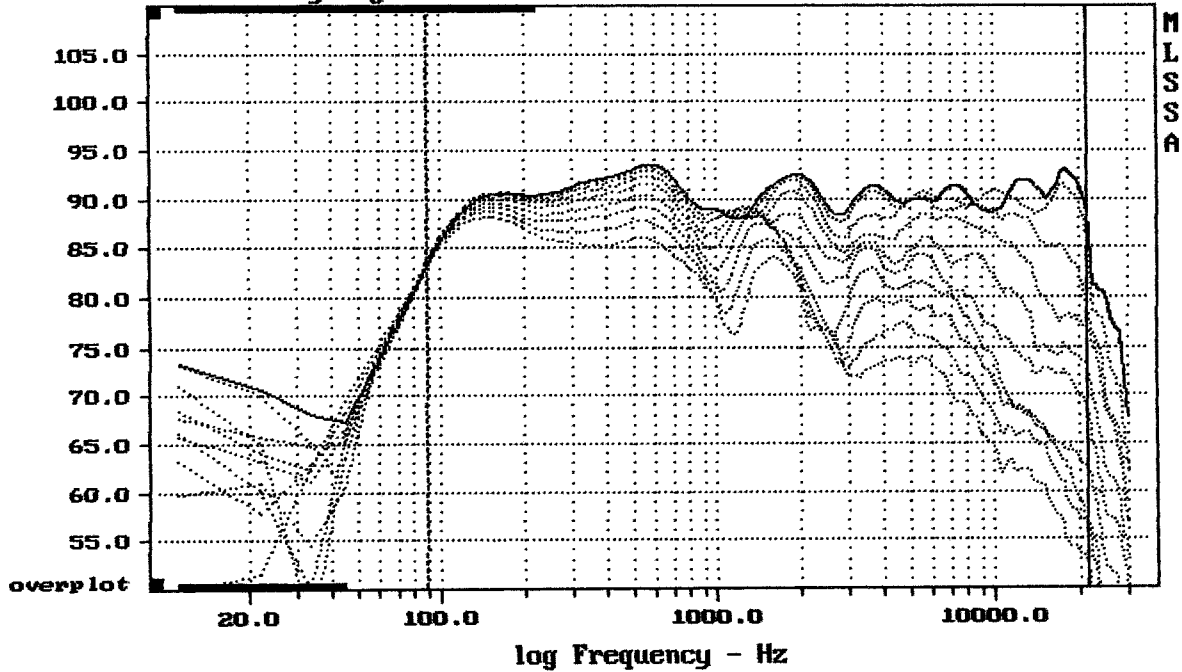

Overlay Compare: dev= +25/-13, std= 9.3, avg= -25

FOCUX C-8


MLSSA: Frequency Domain

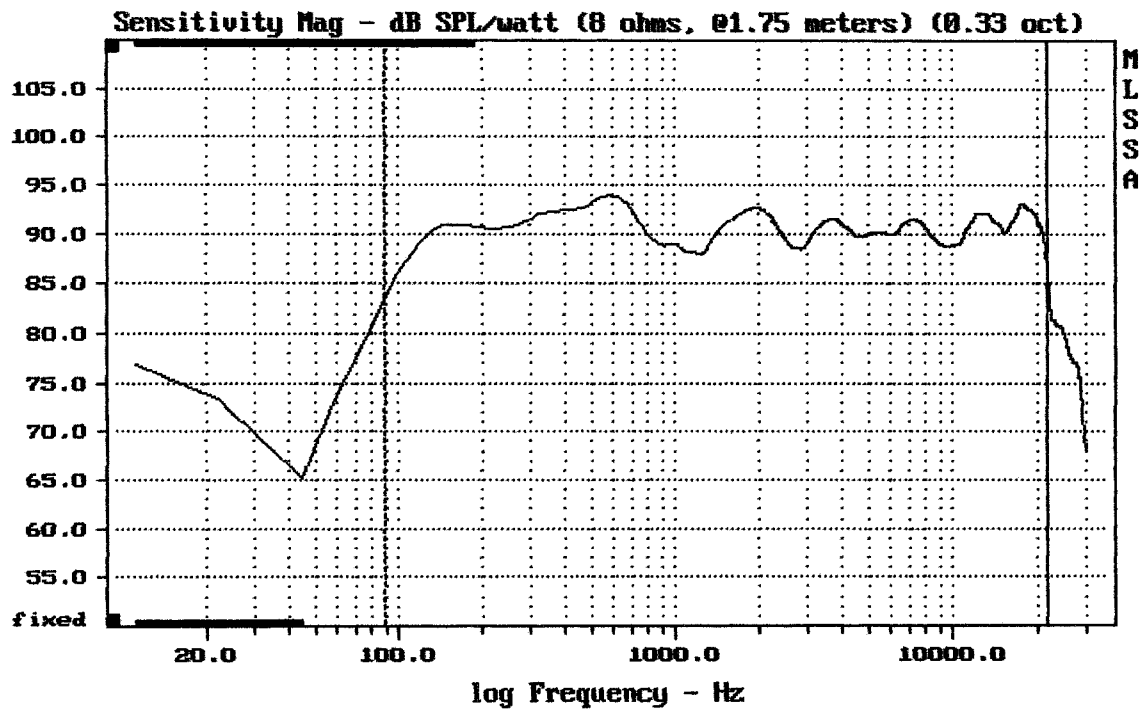

mean: 90.89, rms: 90.98, std: 1.21, max: 93.96, min: 83.39

FOCUX C-8


MLSSA: Frequency Domain

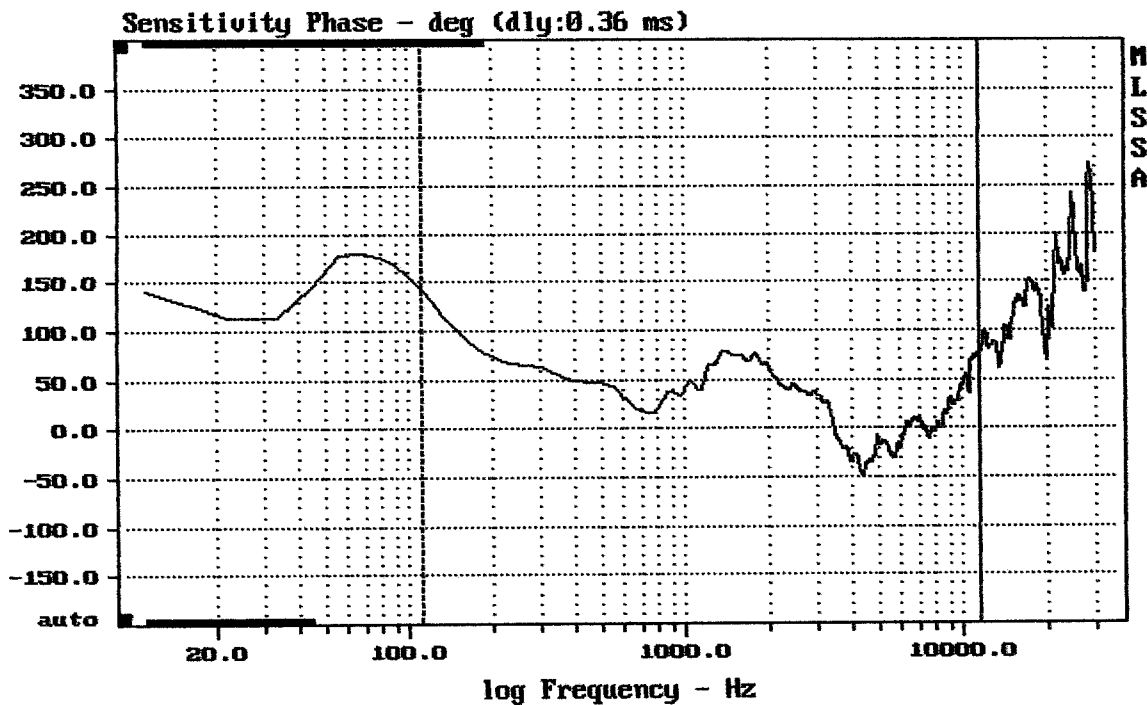

mean: 28.43, rms: 39.83, std: 34.19, max: 142.9, min: -47.5

FOCUX C-8


MLSSA: Frequency Domain

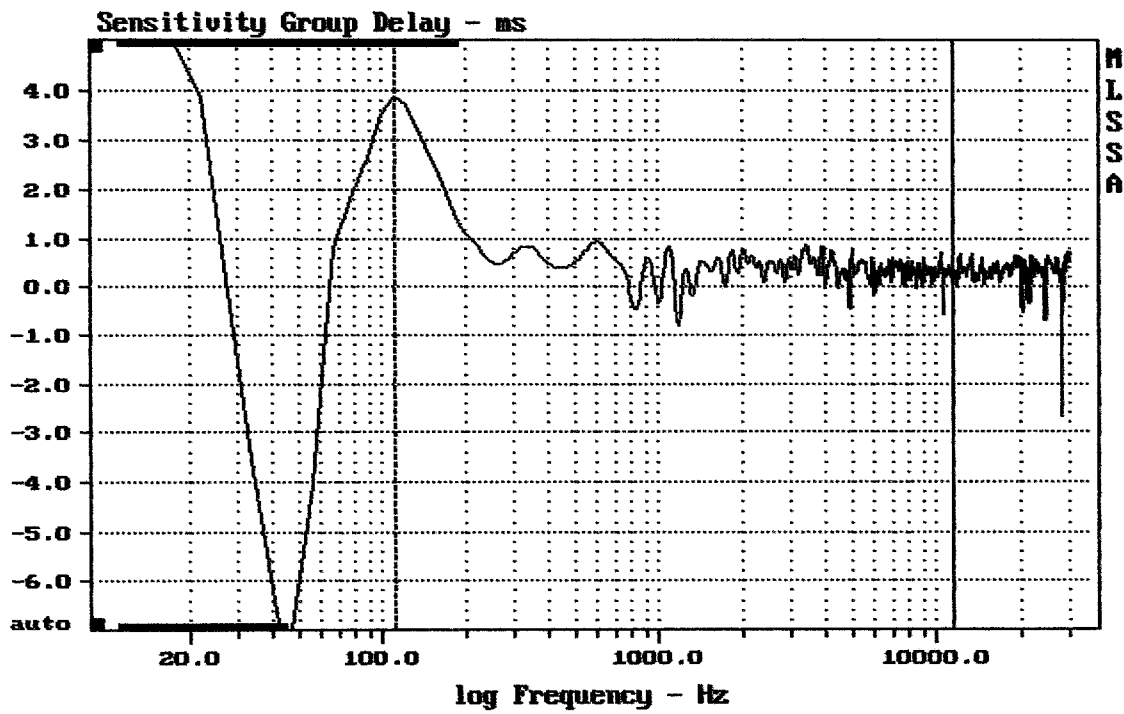

mean: 0.3756, rms: 0.4942, std: 0.3212, max: 3.886, min: -0.8214

FOCUX C-8


MLSSA: Frequency Domain

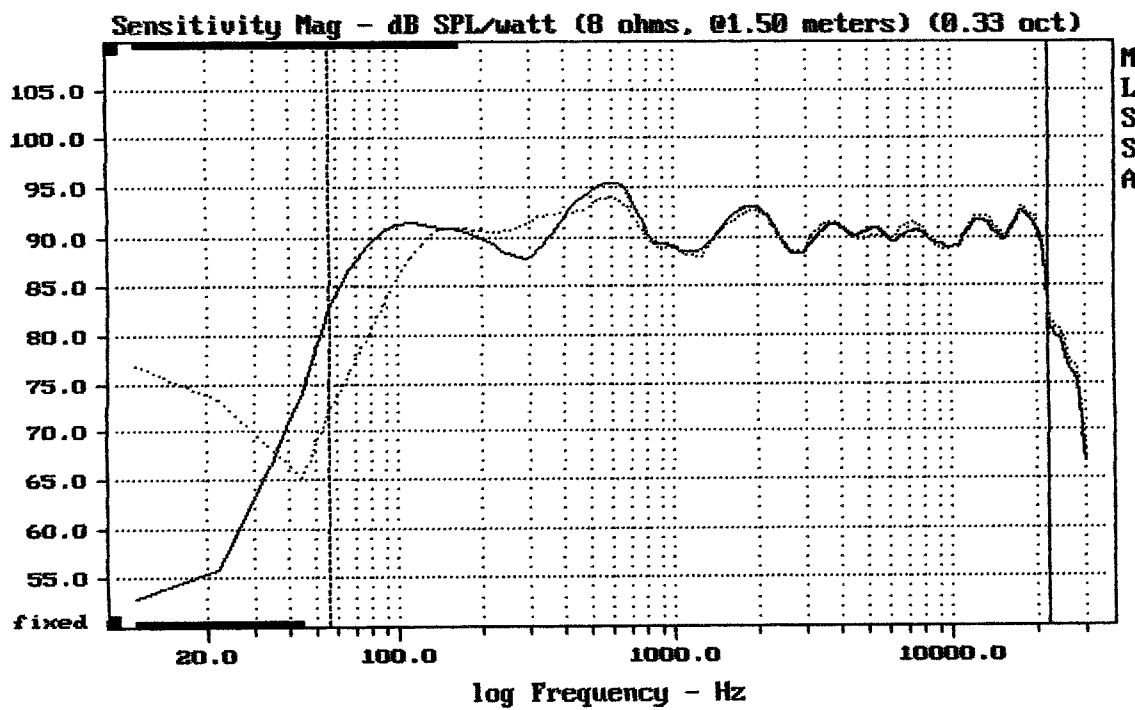

Overlay Compare: dev= +11/-3.4, std= 0.67, avg= -0.2

— FLOOR


MLSSA: Frequency Domain

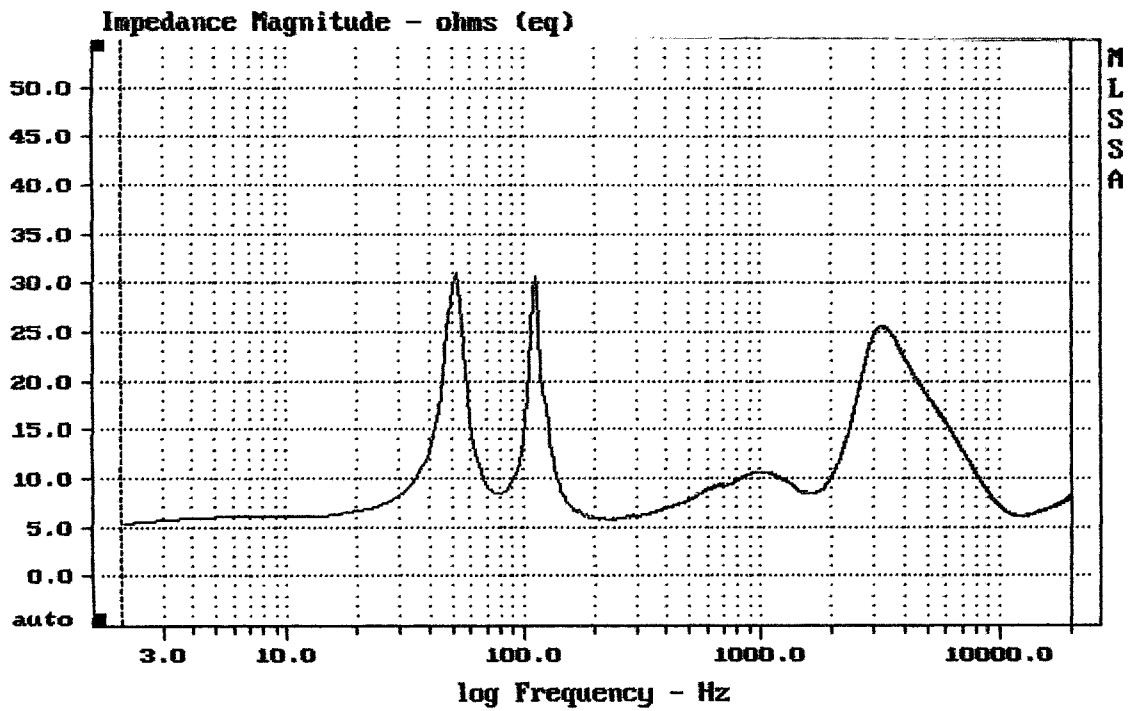

mean: 10.48, rms: 11.8, std: 5.423, max: 31.03, min: 5.381


FOCUX C-8

MLSSA: Frequency Domain

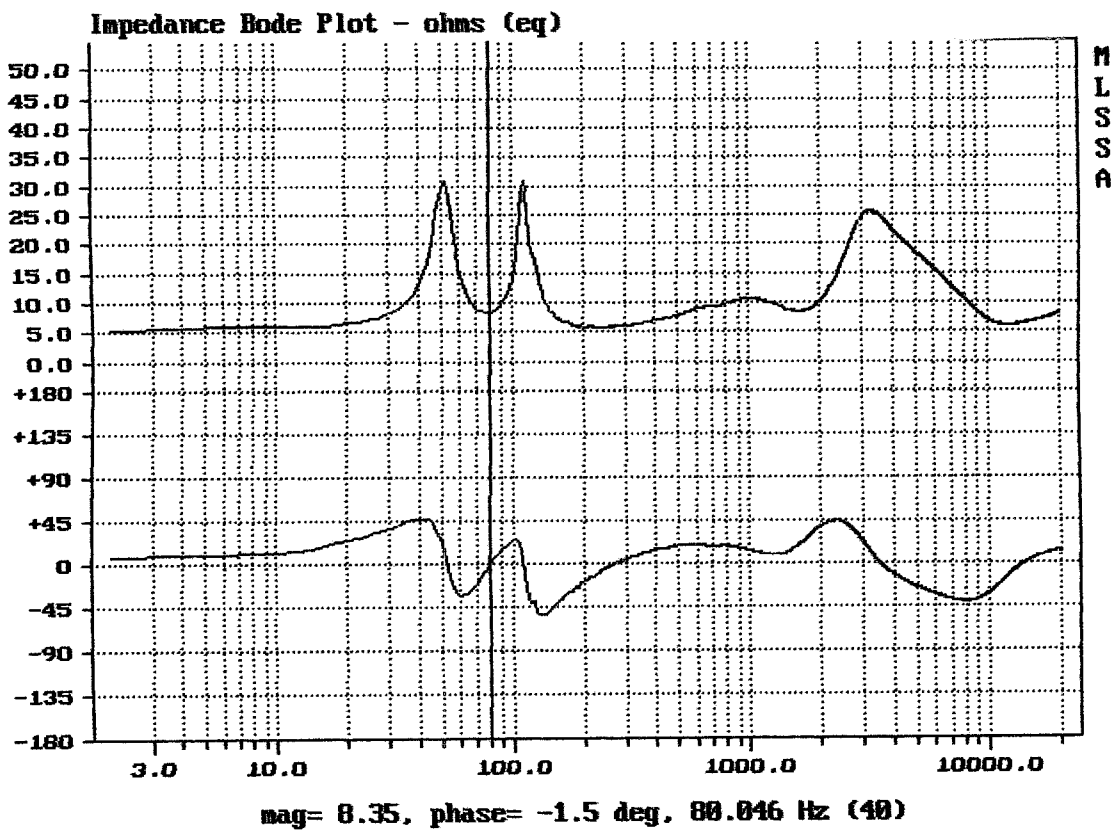

DTTO

Impulse Response - volts

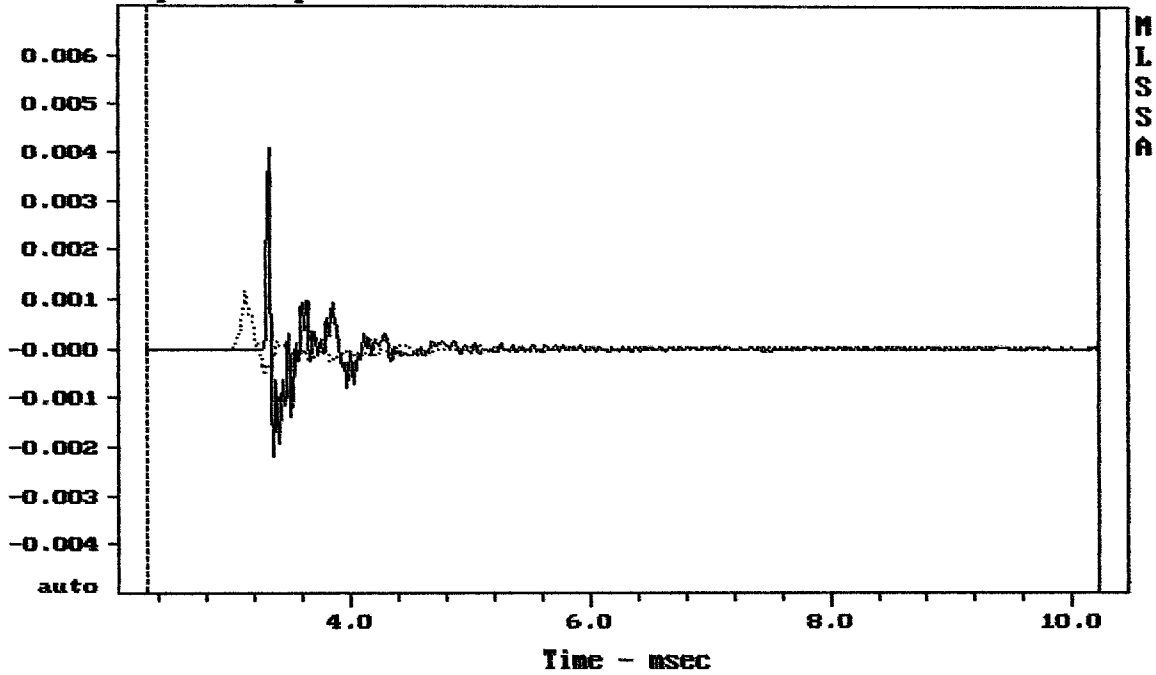


CURSOR: $dy = -1.51368e-005$ $x = 10.2190$ (929)

FOCUX CB

MLSSA: Time Domain


Sensitivity Magnitude - dB SPL/watt (8 ohms, @1.00 meters)

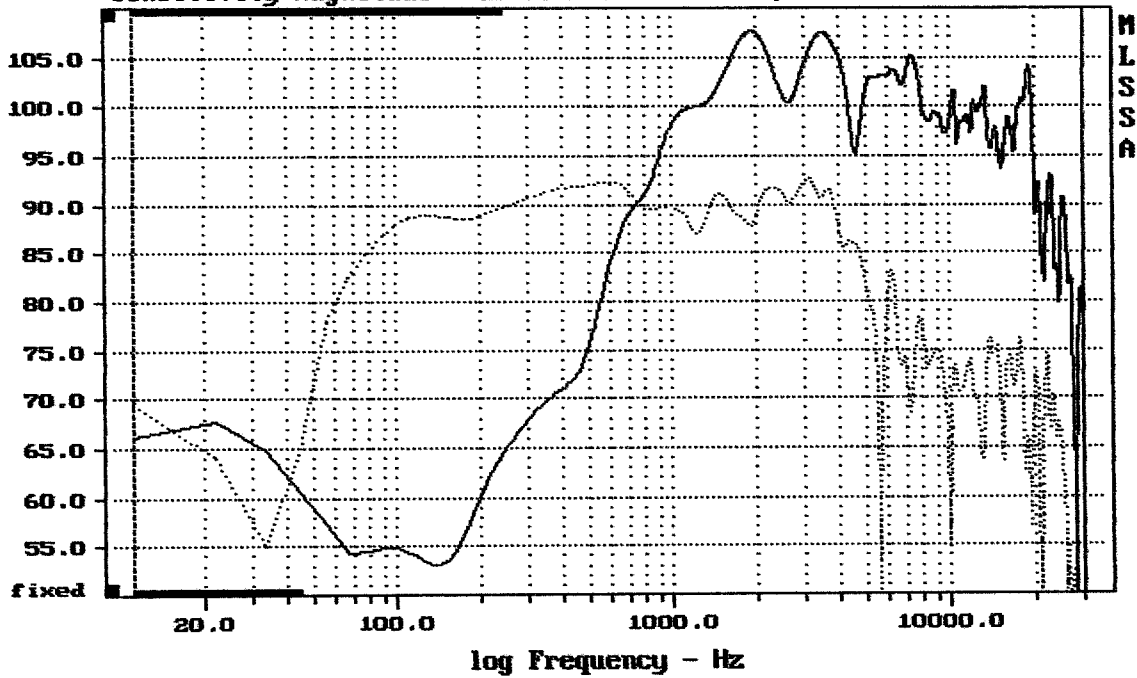

CURSOR: $dy = -46.1184$ $x = 30007.1014$ (2704)

FOCUX CB


MLSSA: Frequency Domain

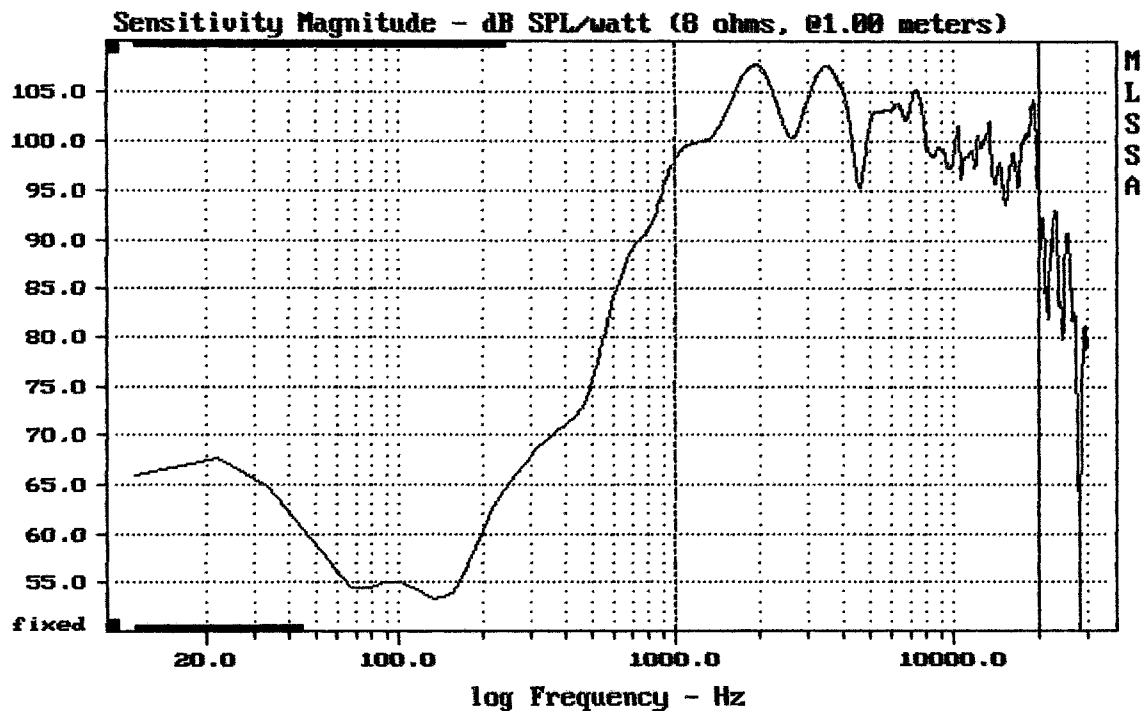

Level (999:19997 Hz) = 102.97 dB SPL/watt (8 ohms, @1.00 meters)


FOCUX CB

MLSSA: Frequency Domain

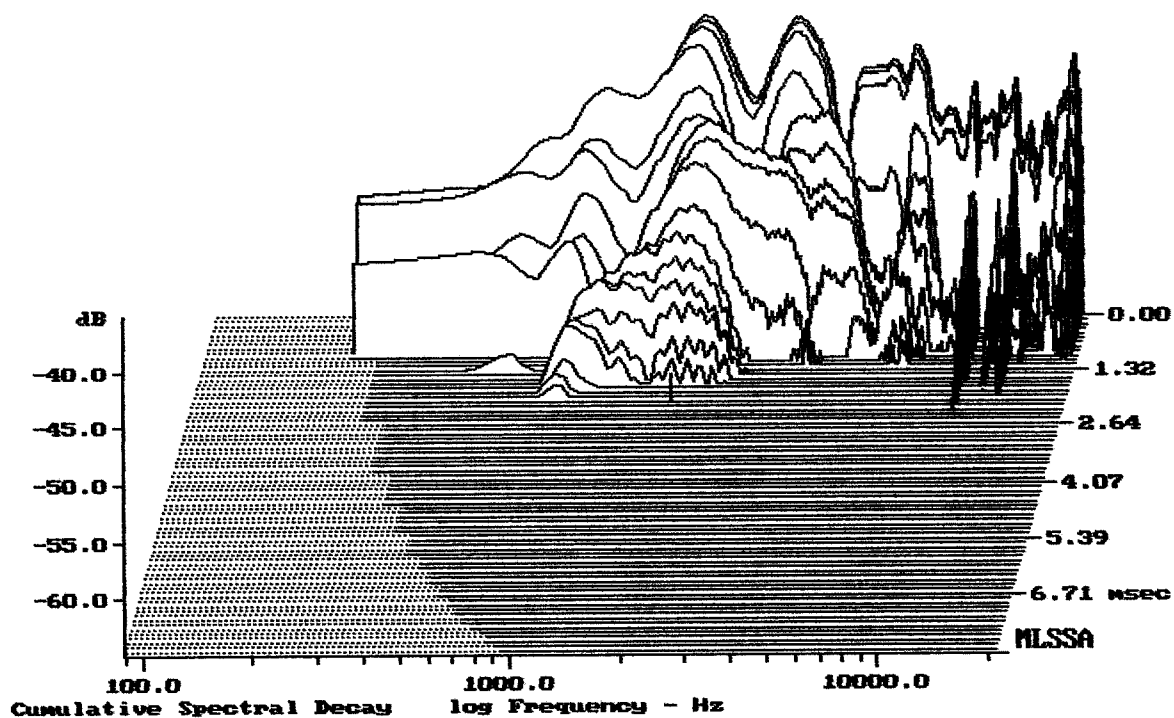

-65.00 dB, 1731 Hz (39), 1.768 msec (17)


DTTO

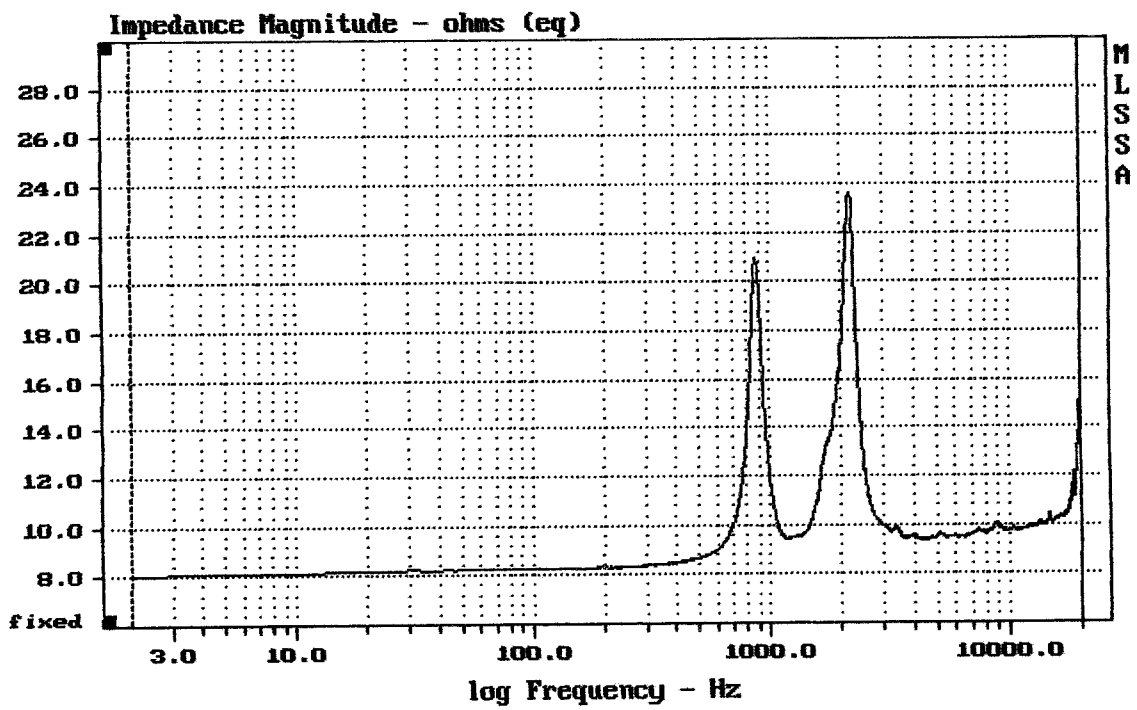

mean: 10.49, rms: 10.68, std: 1.963, max: 23.63, min: 8.041

FOCUX CB


MLSSA: Frequency Domain

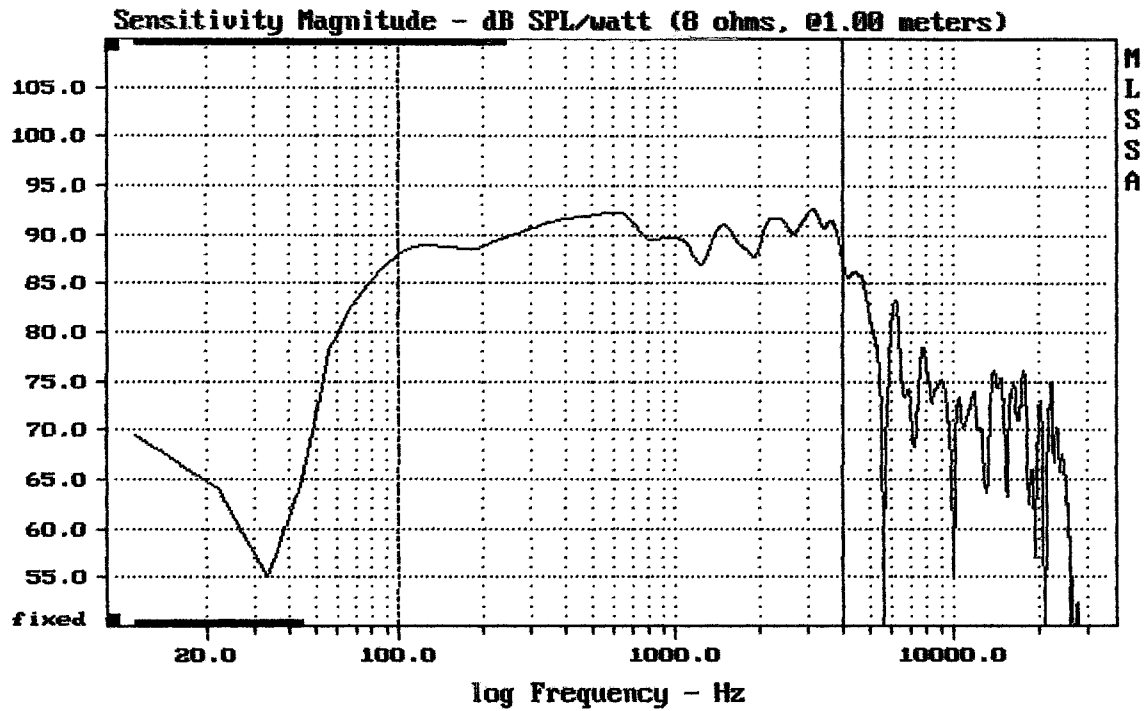

Level (100:3995 Hz) = 90.33 dB SPL/watt (8 ohms, @1.00 meters)

FOCUX CB

MLSSA: Frequency Domain

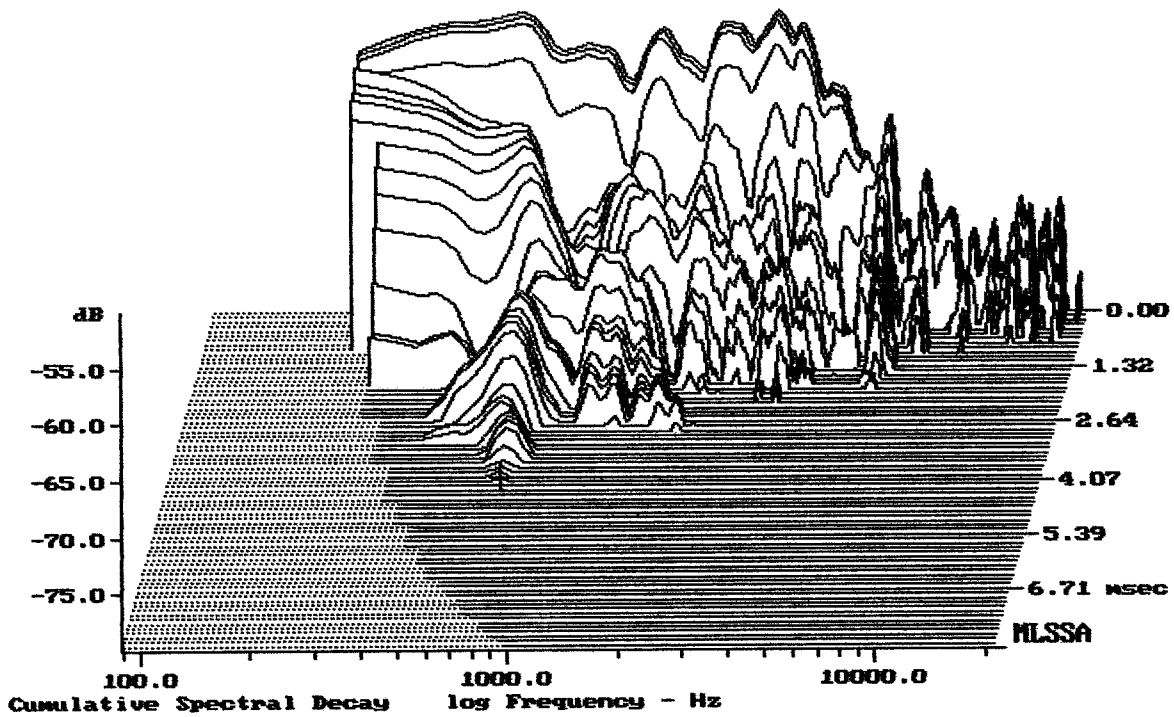

-79.63 dB, 710 Hz (16), 4.878 msec (38)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.52	Ohms
2	Fs	73.92	Hz
3	Re	5.23	Ohms[dc]
4	Res	93.31	Ohms
5	Qms	11.01	
6	Qes	0.62	
7	Qts	0.58	
8	L1	0.56	mH
9	L2	0.67	mH
10	R2	2.26	Ohms
11	RMSE-load	0.23	Ohms
12	Vas(Sd)	14.83	liters
13	Mms	17.75	grams
14	Cms	261	μ M/Newton
15	B1	8.36	Tesla-M
16	SPLref(Sd)	91.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (25.00 grams)

Area (Sd): 201.06 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.2% (-20% to -50% is recommended).

FOCUX C-8

MLSSA: Parameters

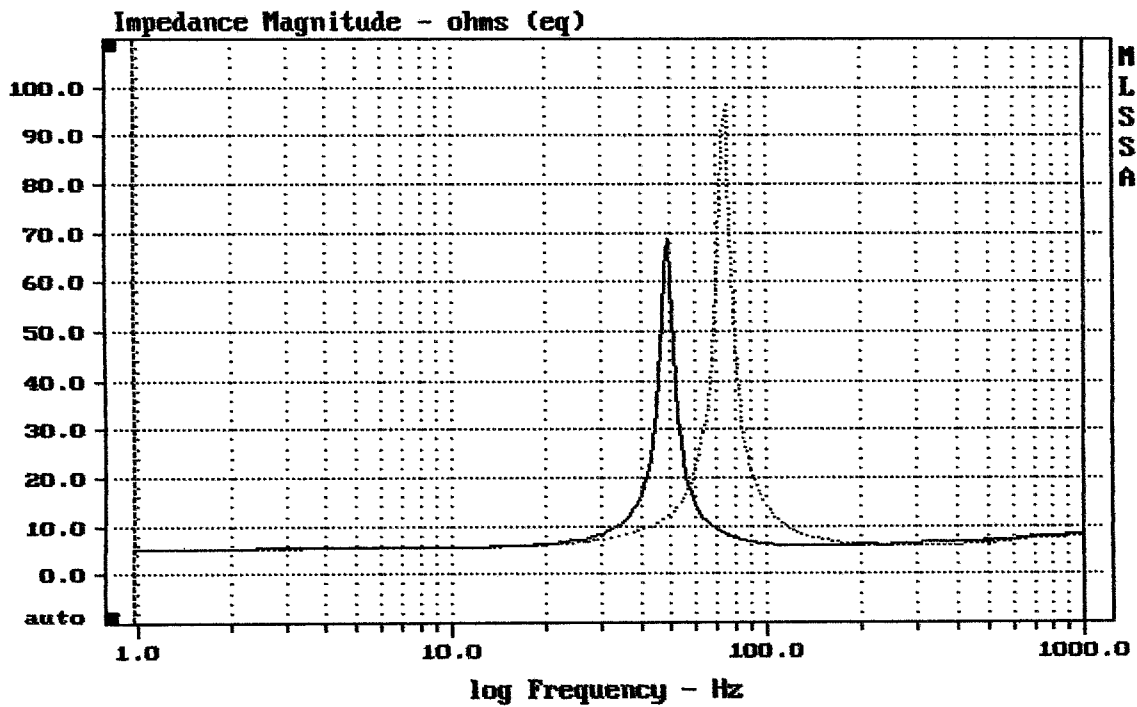

mean: 8.467, rms: 11.91, std: 8.379, max: 96.29, min: 5.316

MLSSA: Frequency Domain