


Level (89:21507 Hz) = 96.53 dB SPL/watt (8 ohms, @1.60 meters)

FOCUX C-10


MLSSA: Frequency Domain

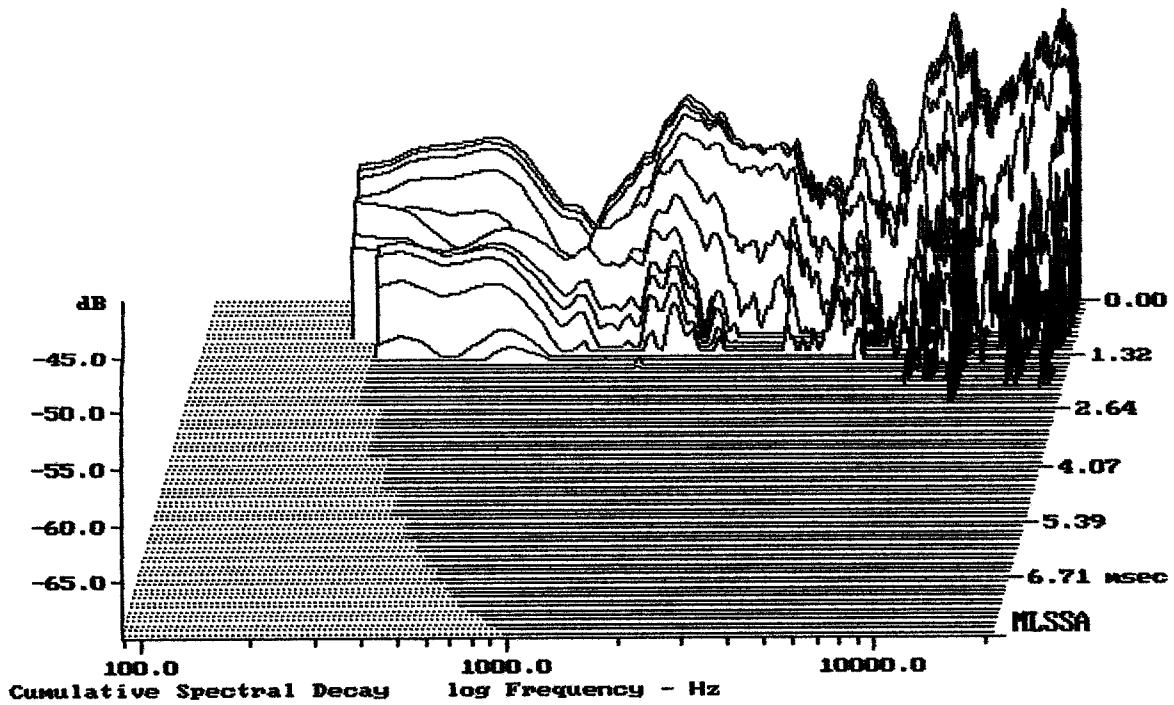

-68.77 dB, 10653 Hz (240), 2.420 msec (23)

DTTO

Step Response - volts

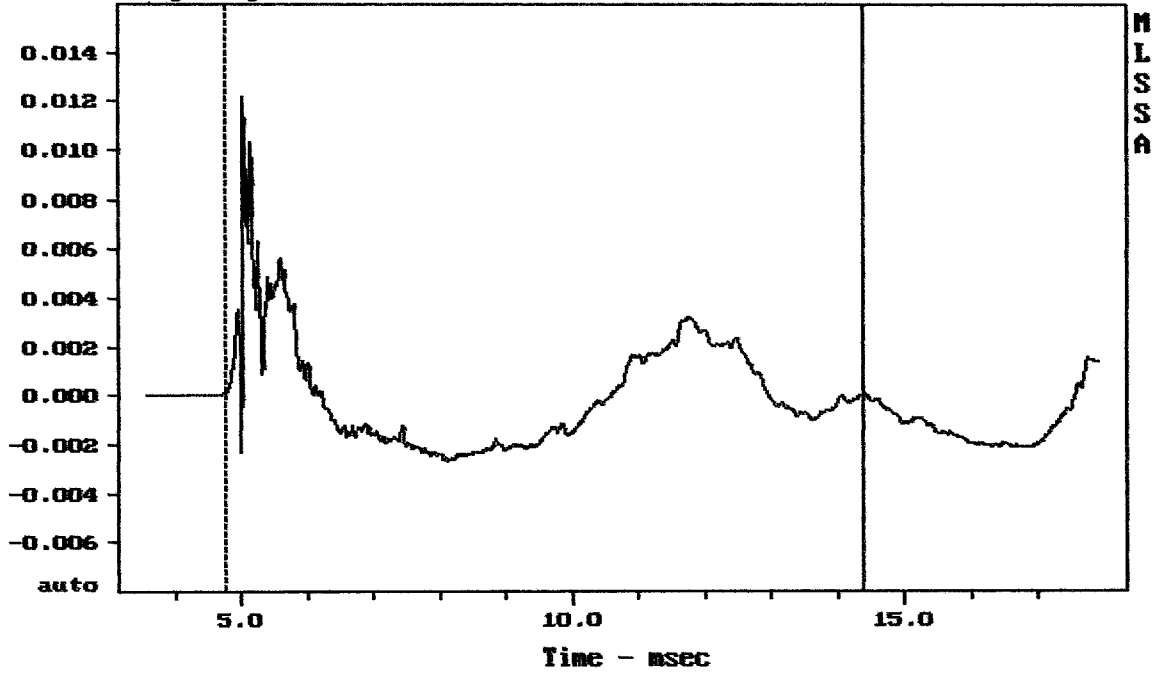


mean: 8.225e-005, rms: 0.002247, std: 0.002245, max: 0.01221, min: -0.002676

FOCUX C-10

MLSSA: Time Domain


Sensitivity Mag - dB SPL/watt (8 ohms, @1.60 meters) (0.33 oct)

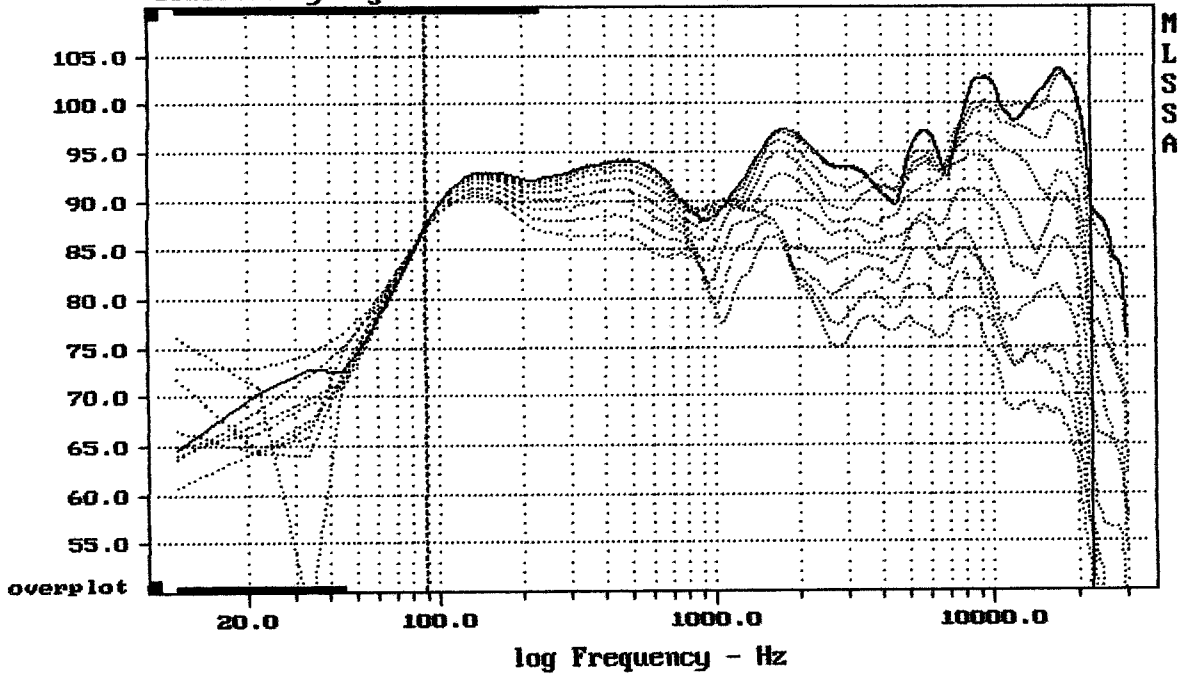

Overlay Compare: dev= +27/-15, std= 9.9, avg= -27

FOCUX C-10


MLSSA: Frequency Domain

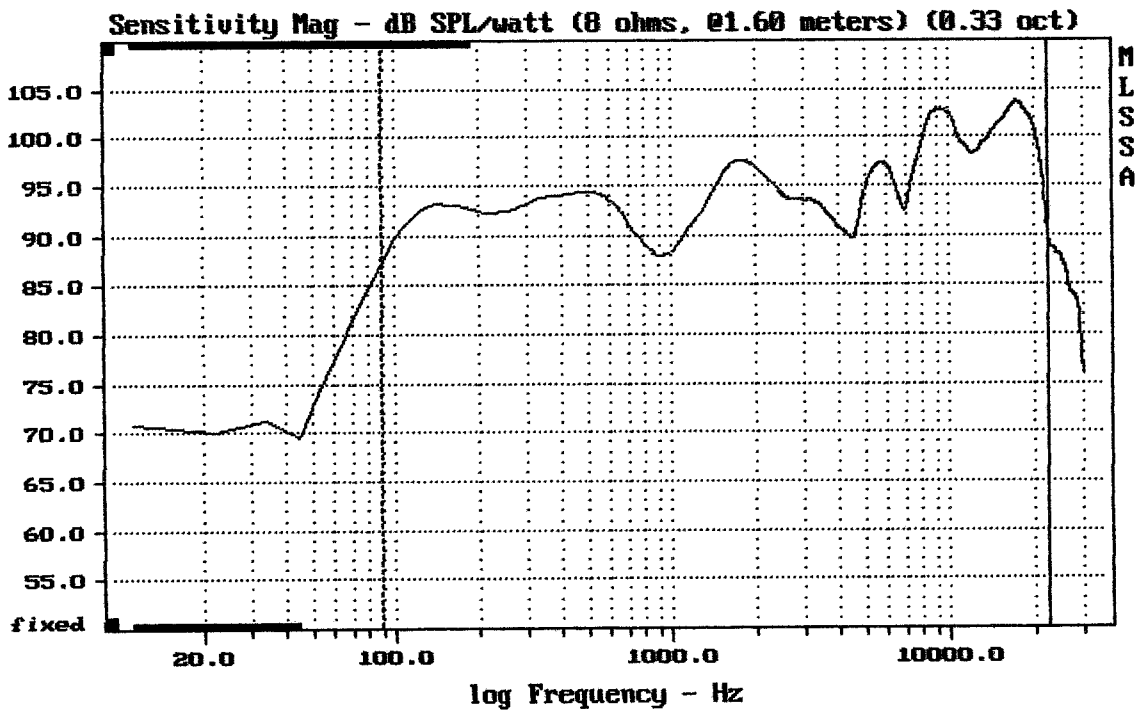

mean: 99.16, rms: 99.84, std: 2.99, max: 103.67, min: 87.27

FOCUX C-10


MLSSA: Frequency Domain

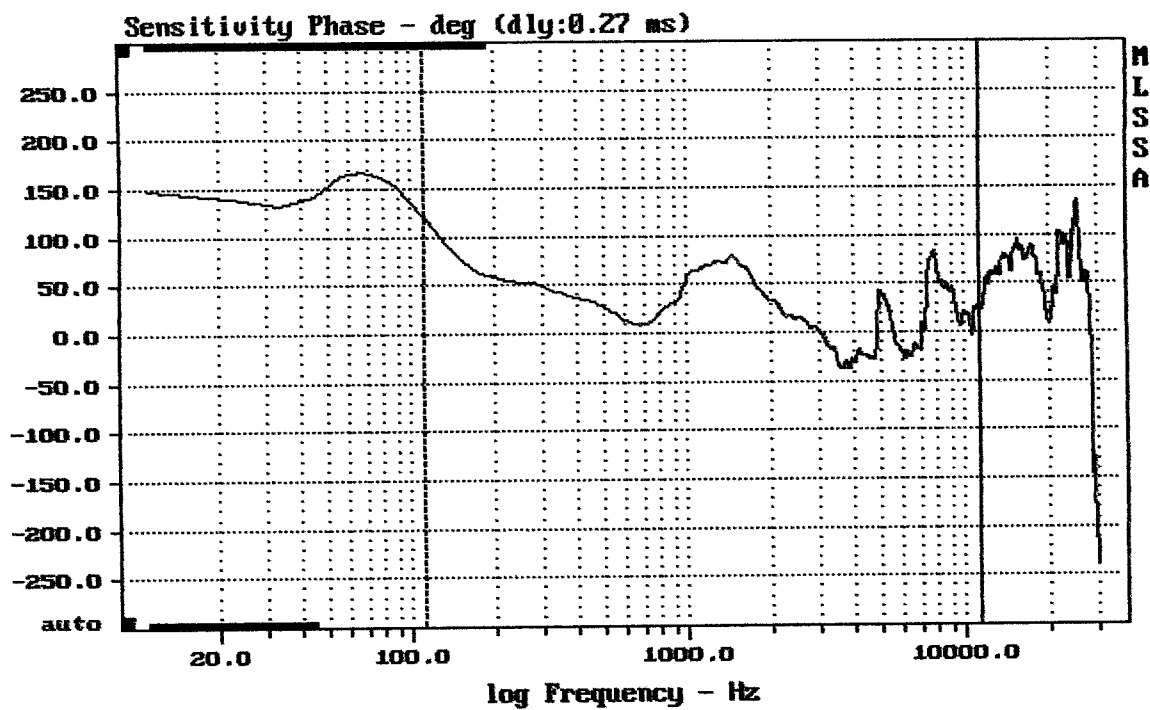

mean: 18.33, rms: 36.98, std: 32.12, max: 121, min: -37.78

FOCUX C-10


MLSSA: Frequency Domain

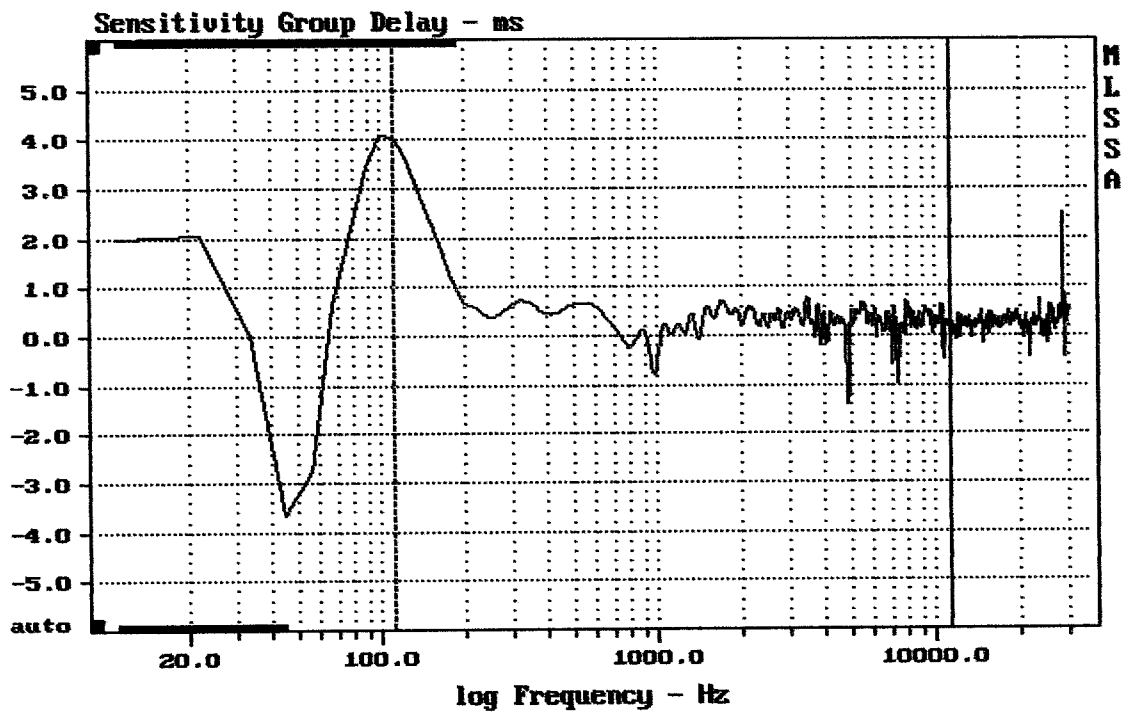

mean: 0.2977, rms: 0.4647, std: 0.3568, max: 4.06, min: -1.409

FOCUX C-10


MLSSA: Frequency Domain

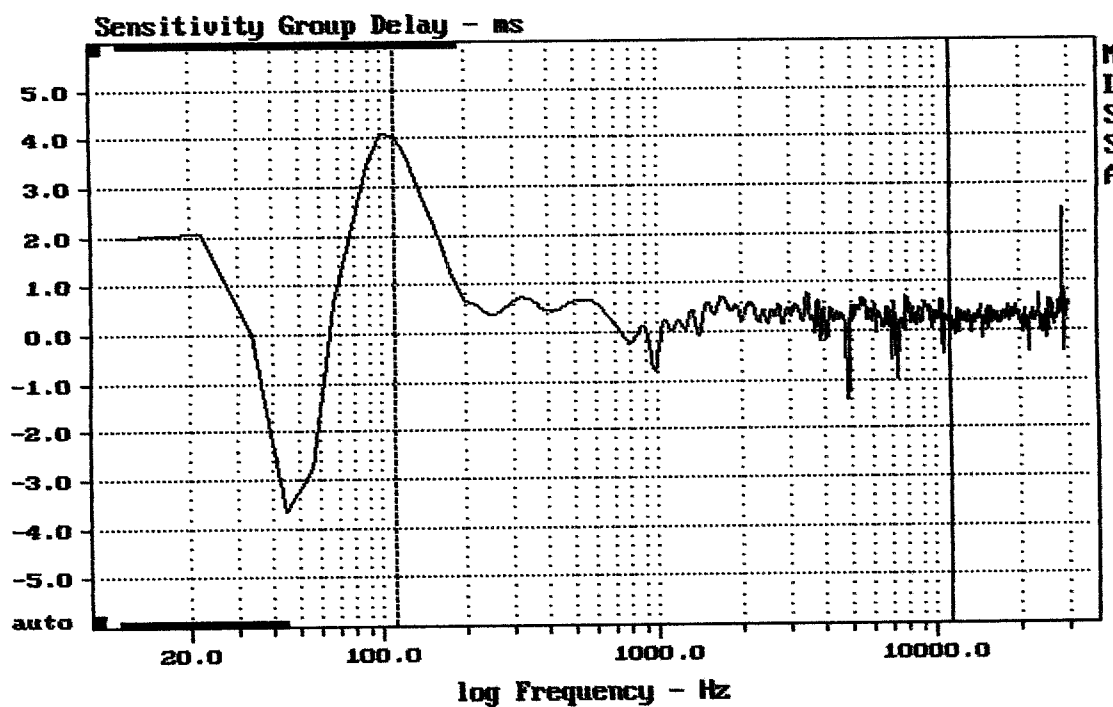

mean: 0.2977, rms: 0.4647, std: 0.3568, max: 4.06, min: -1.409

FOCUX C-10


MLSSA: Frequency Domain

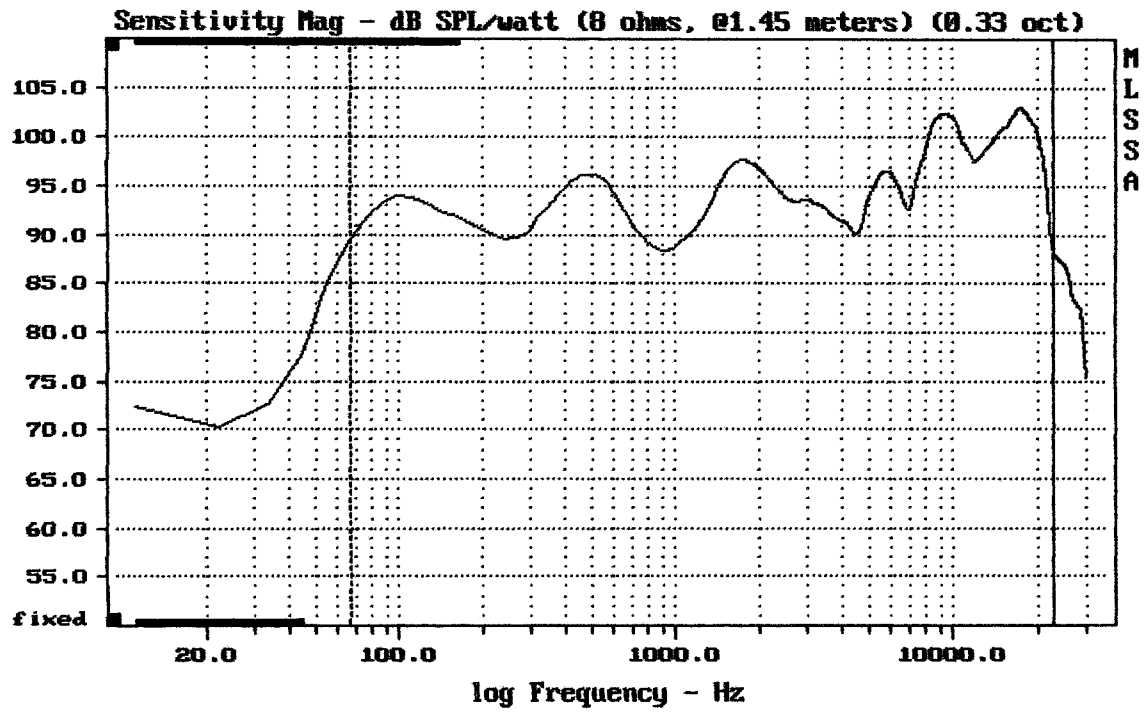

mean: 98.59, rms: 99.24, std: 2.94, max: 102.98, min: 88.32

FOCUX C-18 FLOOR


MLSSA: Frequency Domain

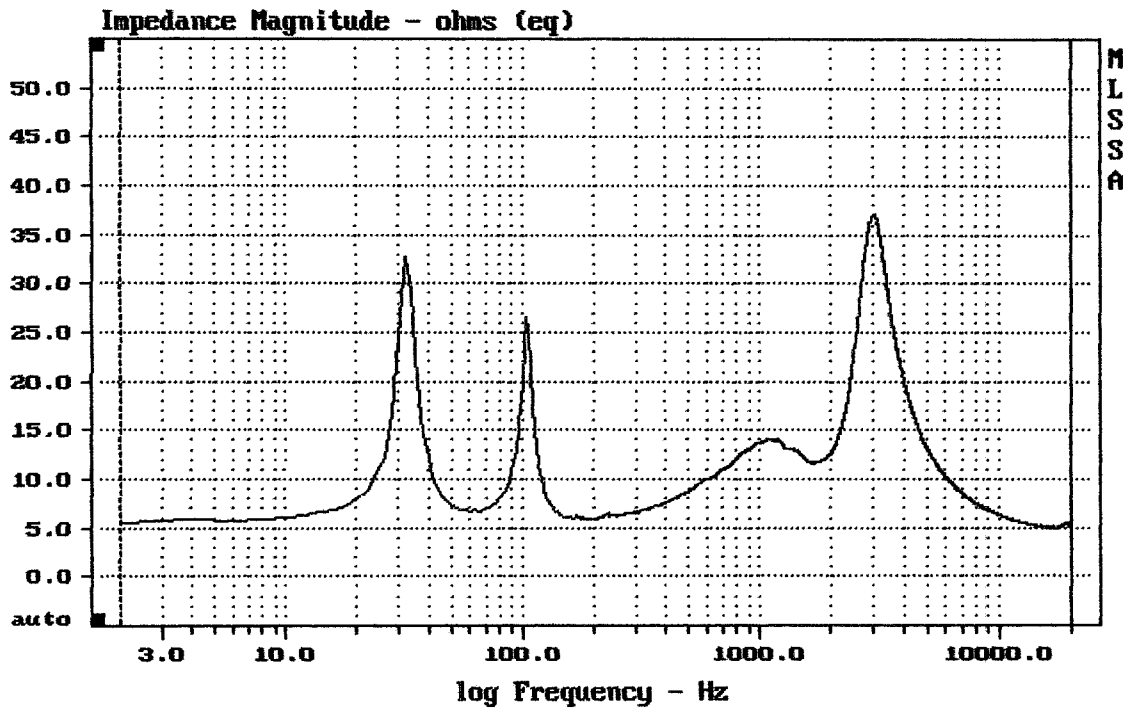

mean: 9.386, rms: 11.63, std: 6.873, max: 37.16, min: 4.955

FOCLIX C-18


MLSSA: Frequency Domain

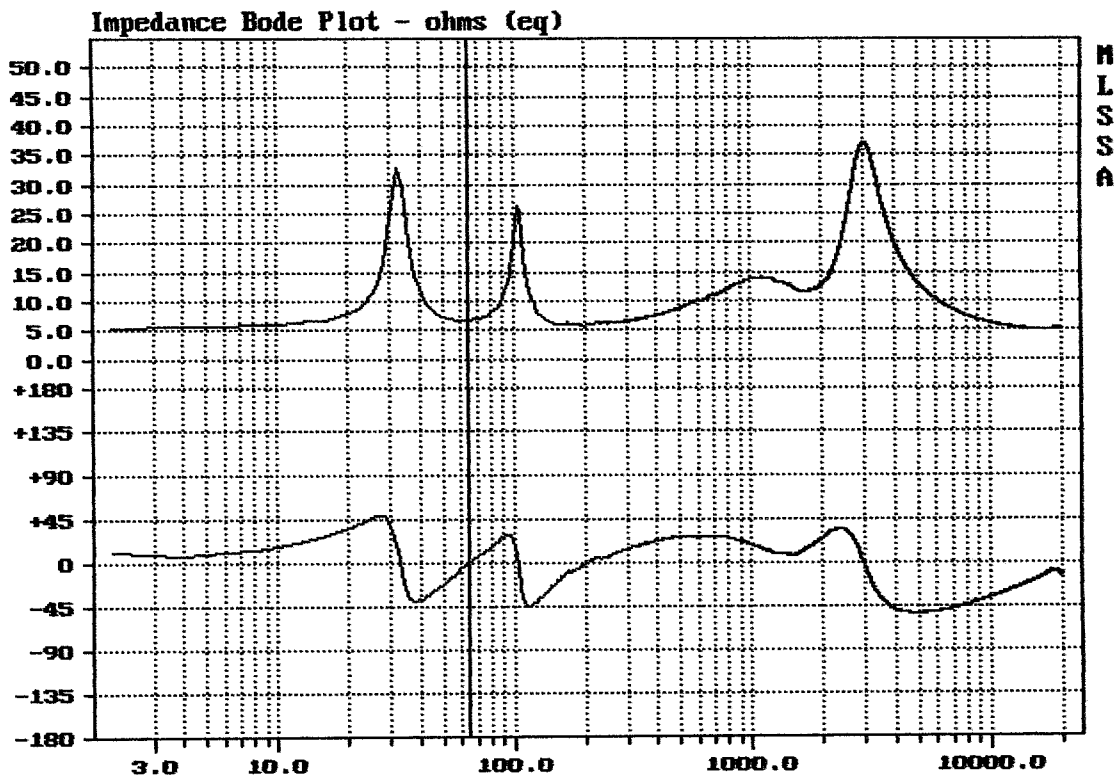

mag= 6.71, phase= -0.6 deg, 64.037 Hz (32)

DTTO

Impulse Response - volts

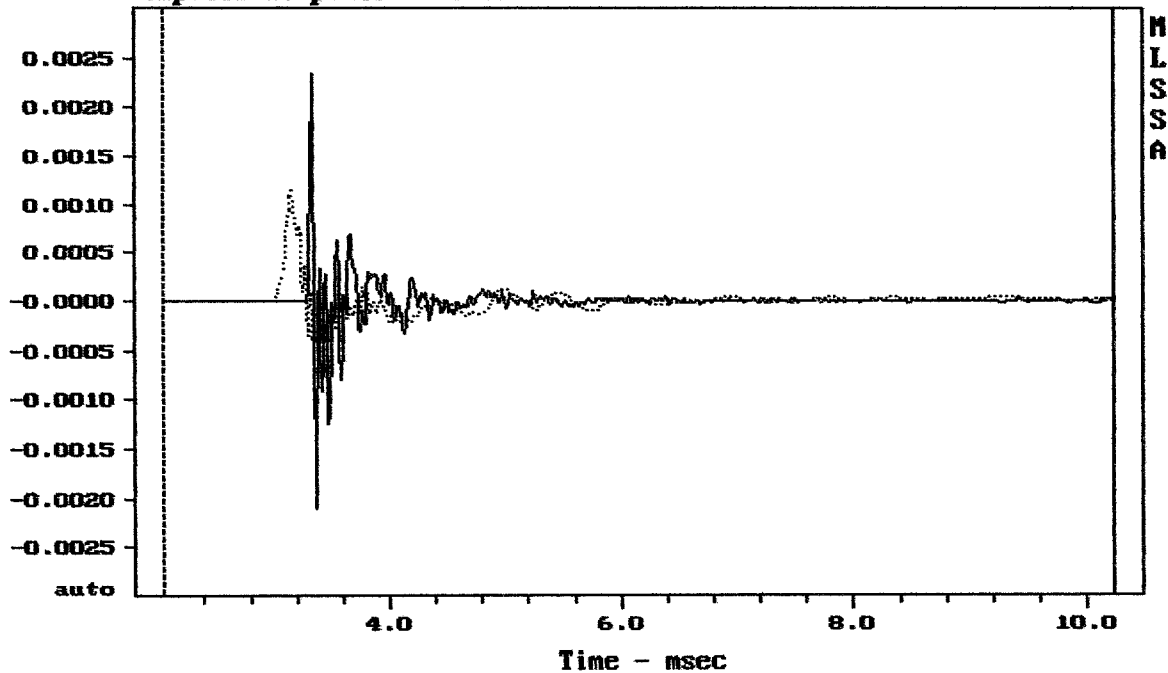


MLSSA

CURSOR: $\Delta y = 3.45924e-005$ $x = 10.2300$ (930)

FOCUX C10

MLSSA: Time Domain

Sensitivity Magnitude - dB SPL/watt (8 ohms, @1.00 meters)

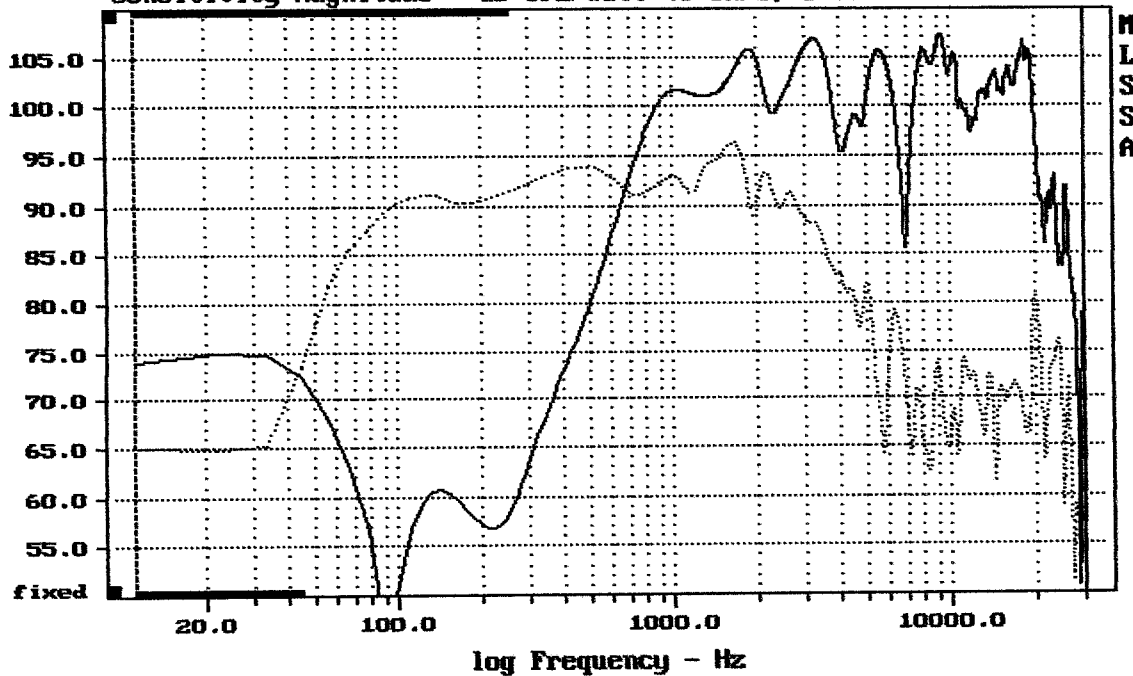


MLSSA

CURSOR: $\Delta y = -21.9744$ $x = 30007.1014$ (2704)

FOCUX C10


MLSSA: Frequency Domain

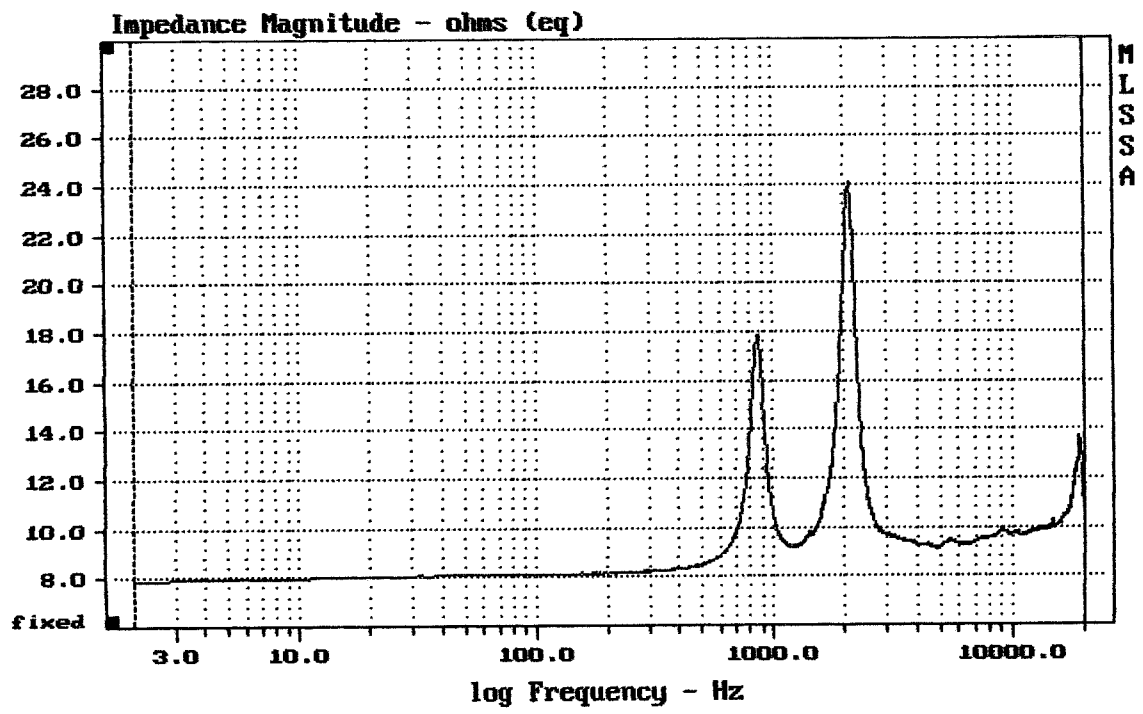

mean: 10.37, rms: 10.55, std: 1.988, max: 24.87, min: 7.87

FOCUX C10


MLSSA: Frequency Domain

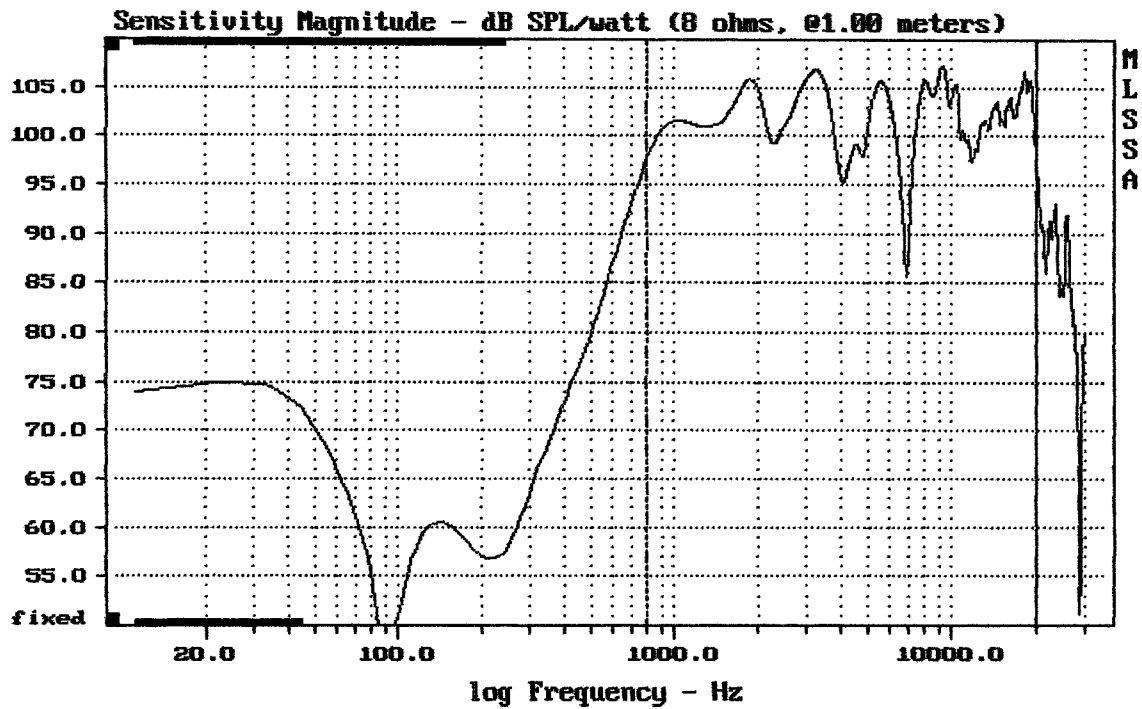

Level (799:20000 Hz) = 102.87 dB SPL/watt (8 ohms, @1.00 meters)


FOCUX C18

MLSSA: Frequency Domain

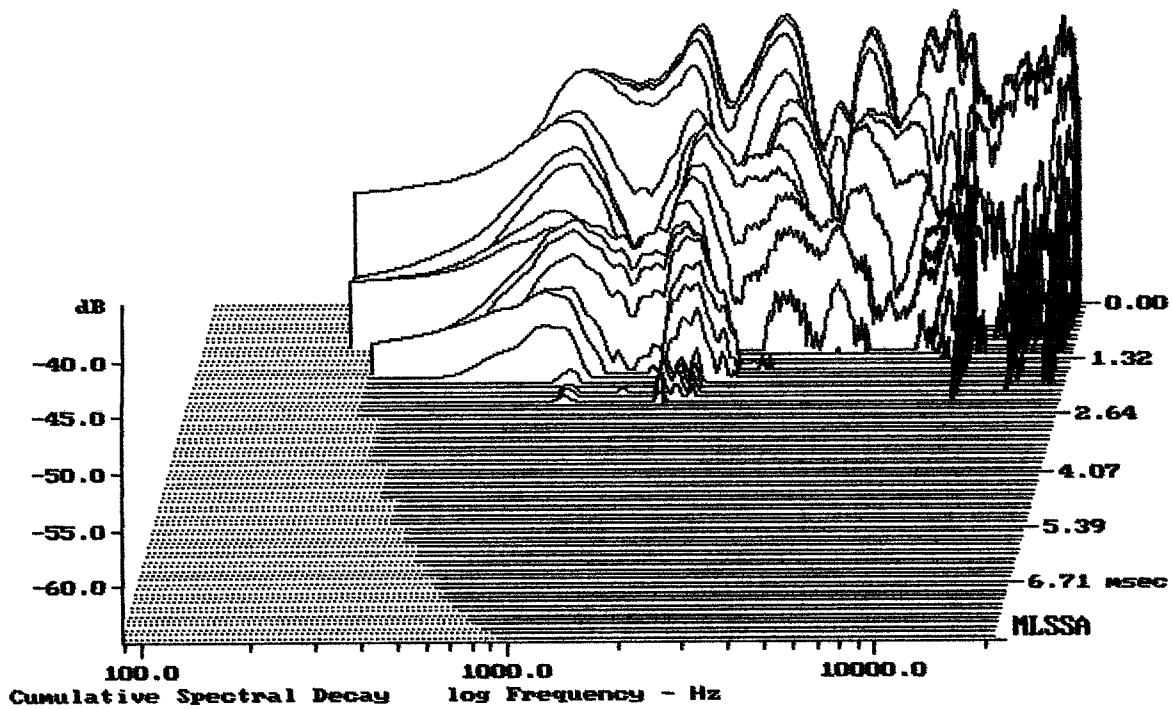

-64.22 dB, 1731 Hz (39), 2.310 msec (22)


DTTO

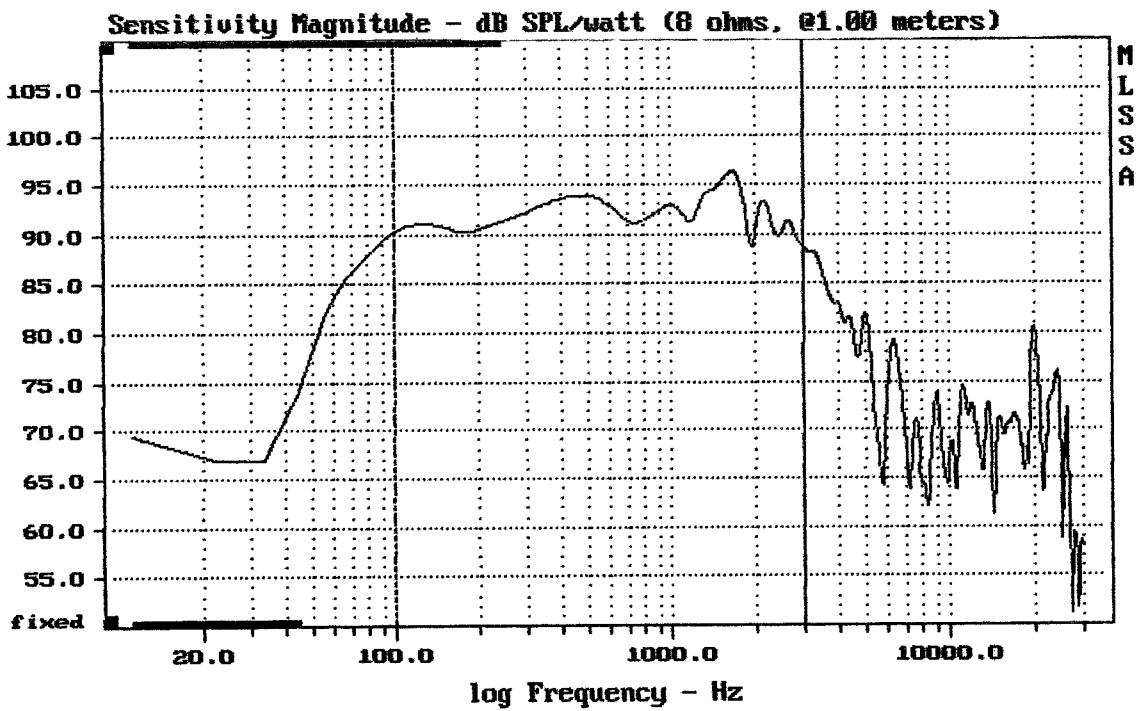

Level (100:2996 Hz) = 92.36 dB SPL/watt (8 ohms, @1.00 meters)

FOCUX C10

MLSSA: Frequency Domain

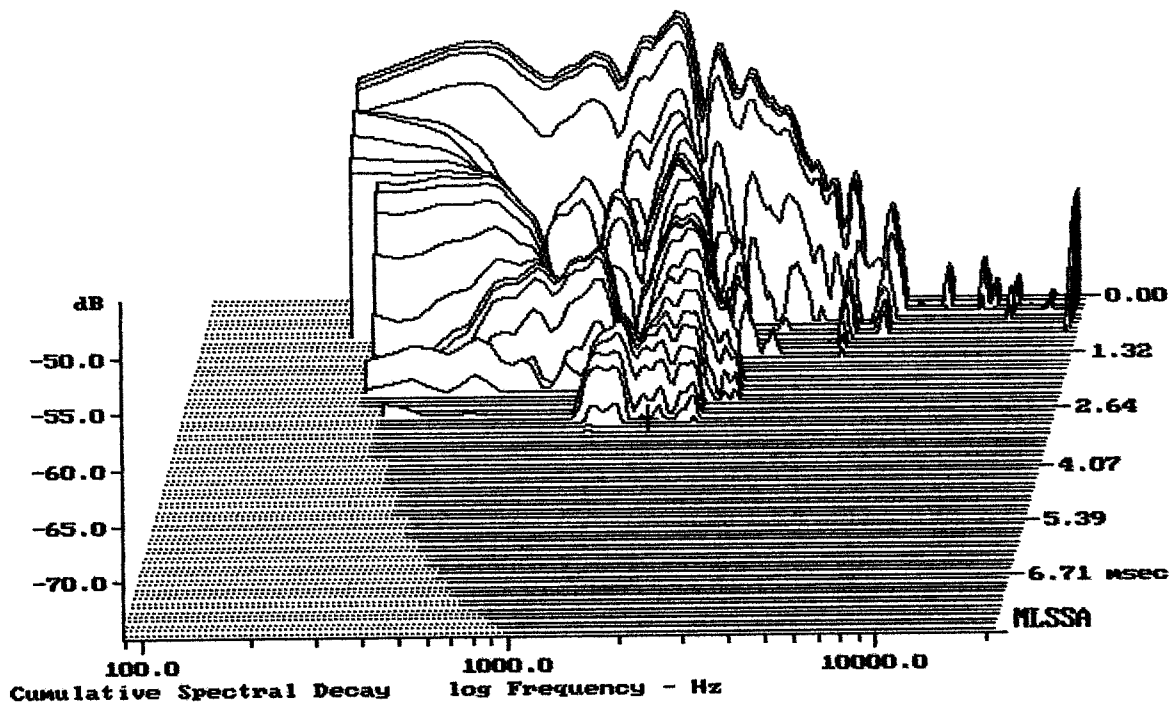

-75.00 dB, 1642 Hz (37), 2.860 msec (27)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	51.13	Hz
3	Re	6.08	Ohms[dc]
4	Res	103.51	Ohms
5	Qms	13.54	
6	Qes	0.79	
7	Qts	0.75	
8	L1	0.58	mH
9	L2	0.73	mH
10	R2	2.49	Ohms
11	RMSE-load	0.21	Ohms
12	Vas(Sd)	62.79	liters
13	Mms	25.99	grams
14	Cms	373	$\mu\text{M}/\text{Newton}$
15	B1	7.99	Tesla-M
16	SPLref(Sd)	92.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (30.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.2% (-20% to -50% is recommended).

FOCUX C-10

MLSSA: Parameters

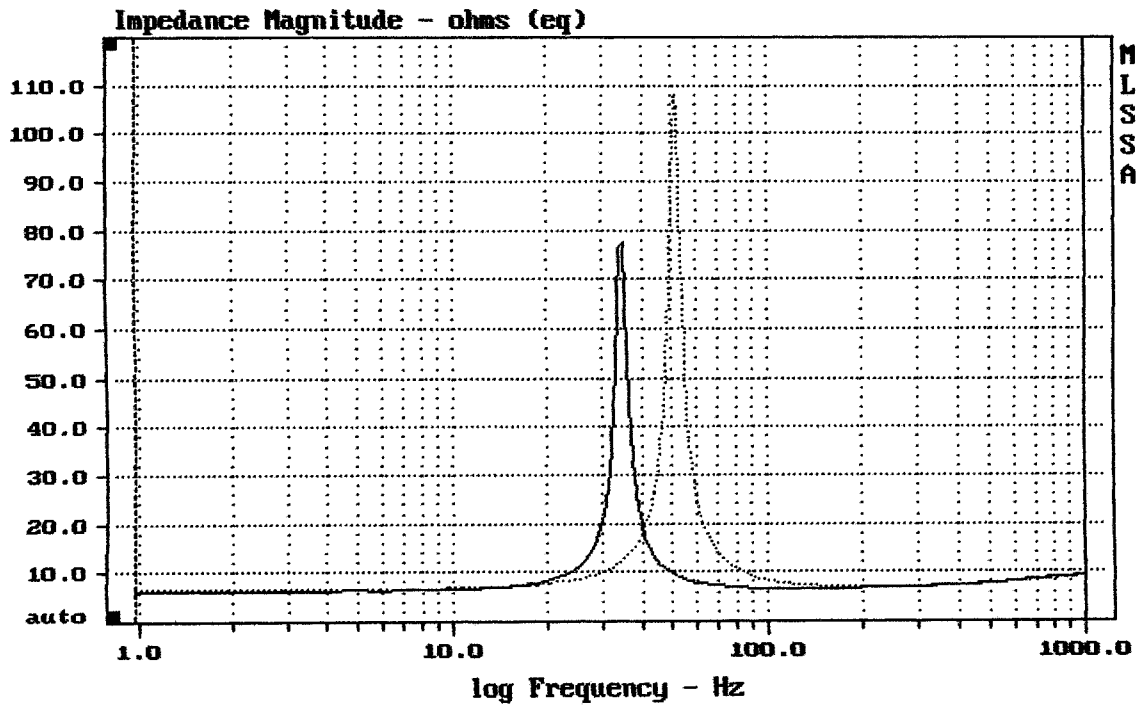

mean: 9.823, rms: 11.46, std: 7.862, max: 108.1, min: 6.521

MLSSA: Frequency Domain