


mean: 95.28, rms: 95.80, std: 2.65, max: 99.59, min: 86.03

SRM350 U3


MLSSA: Frequency Domain

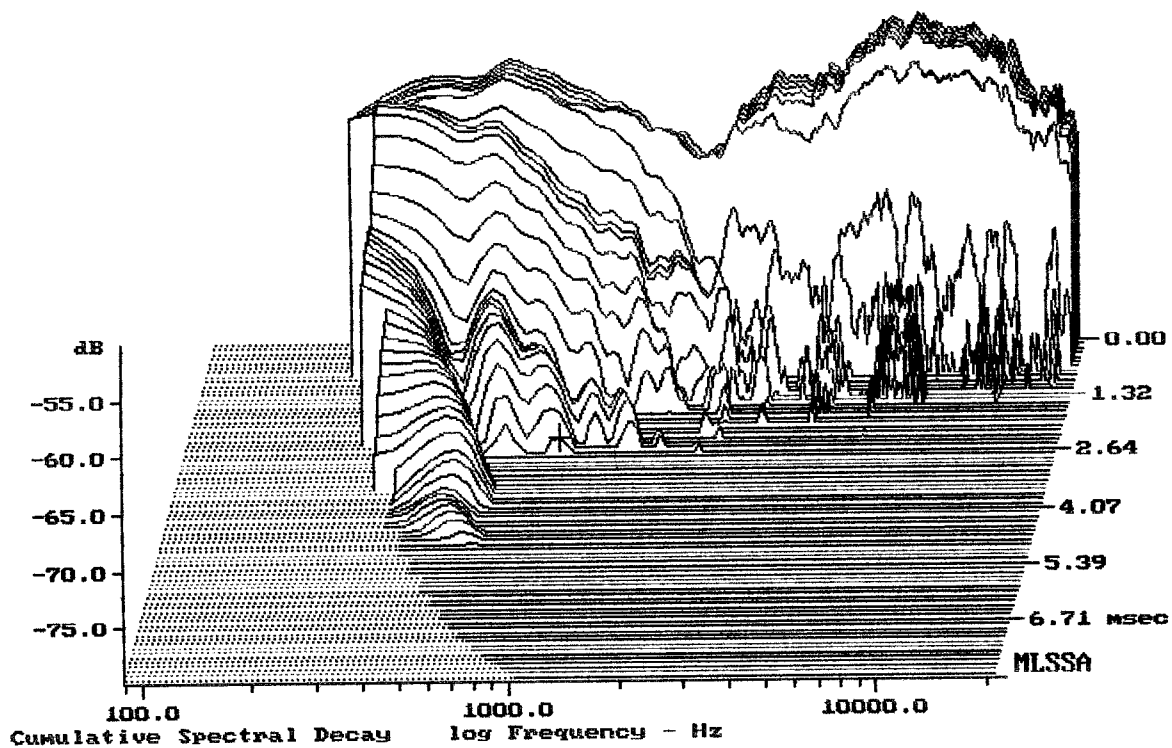

-78.70 dB, 932 Hz (21), 2.640 msec (25)

DTTO

Step Response - volts

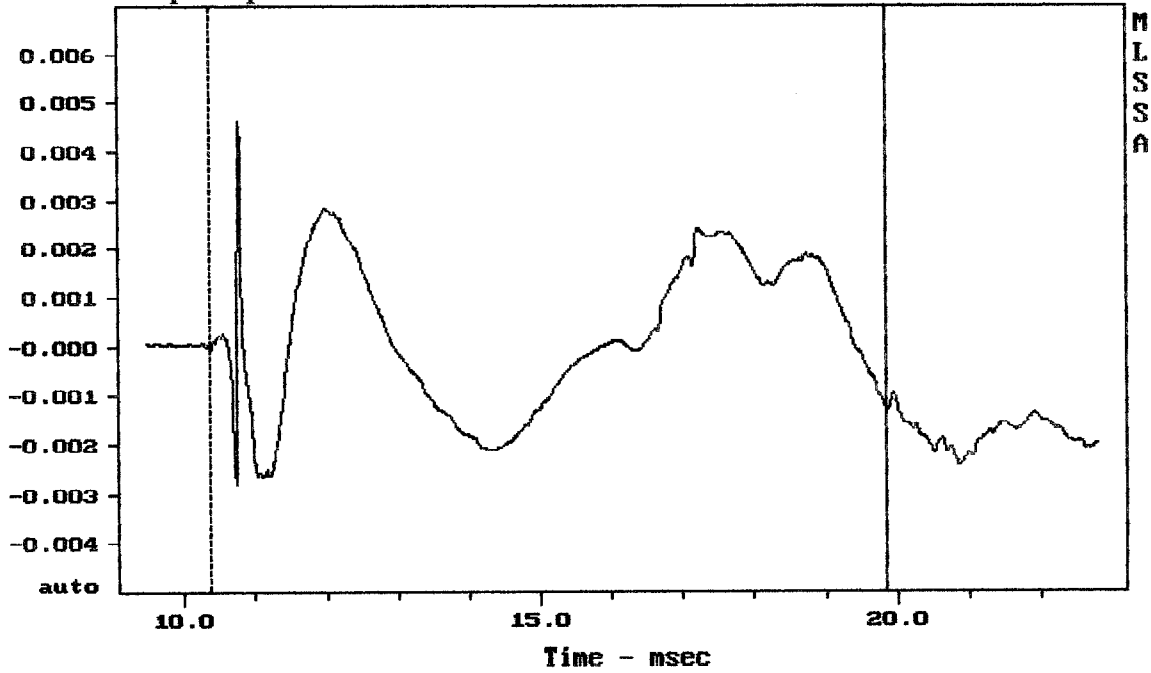


mean: 0.0002339, rms: 0.001522, std: 0.001504, max: 0.004621, min: -0.002807

SRM350 U3

MLSSA: Time Domain

Sensitivity Mag - dB SPL/watt (8 ohms, @1.65 meters) (0.33 oct)

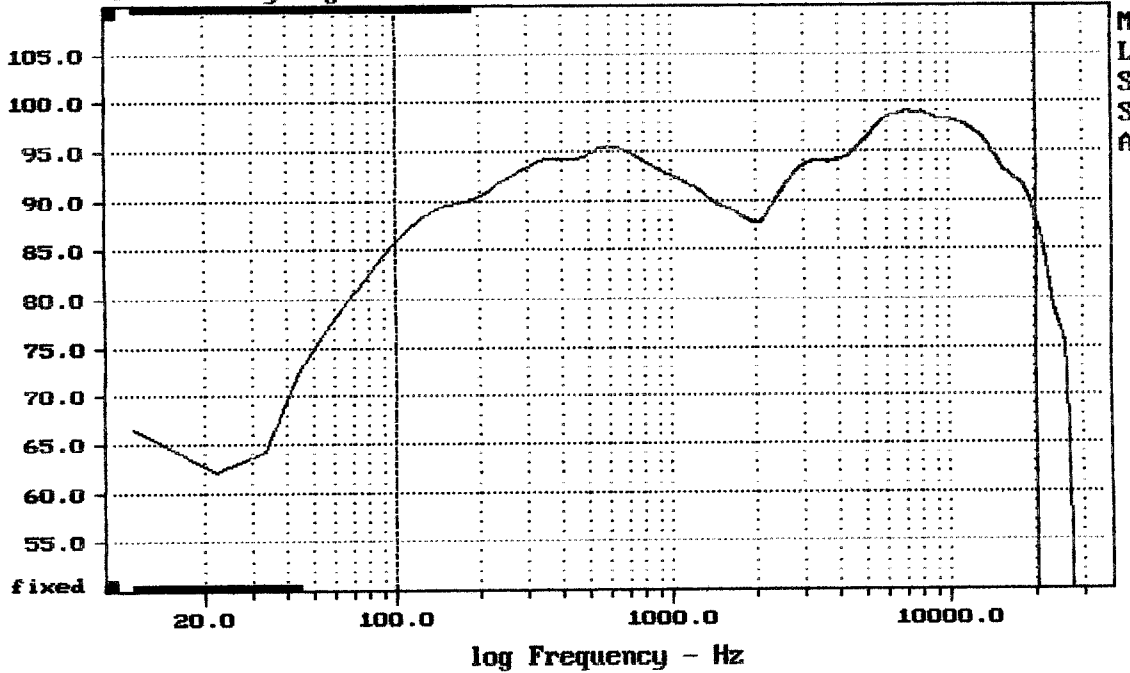


Level (100:20500 Hz) = 94.31 dB SPL/watt (8 ohms, @1.65 meters) (0.33 oct)

SRM350 U3

MLSSA: Frequency Domain

Sensitivity Mag - dB SPL/watt (8 ohms, @1.65 meters) (0.33 oct)

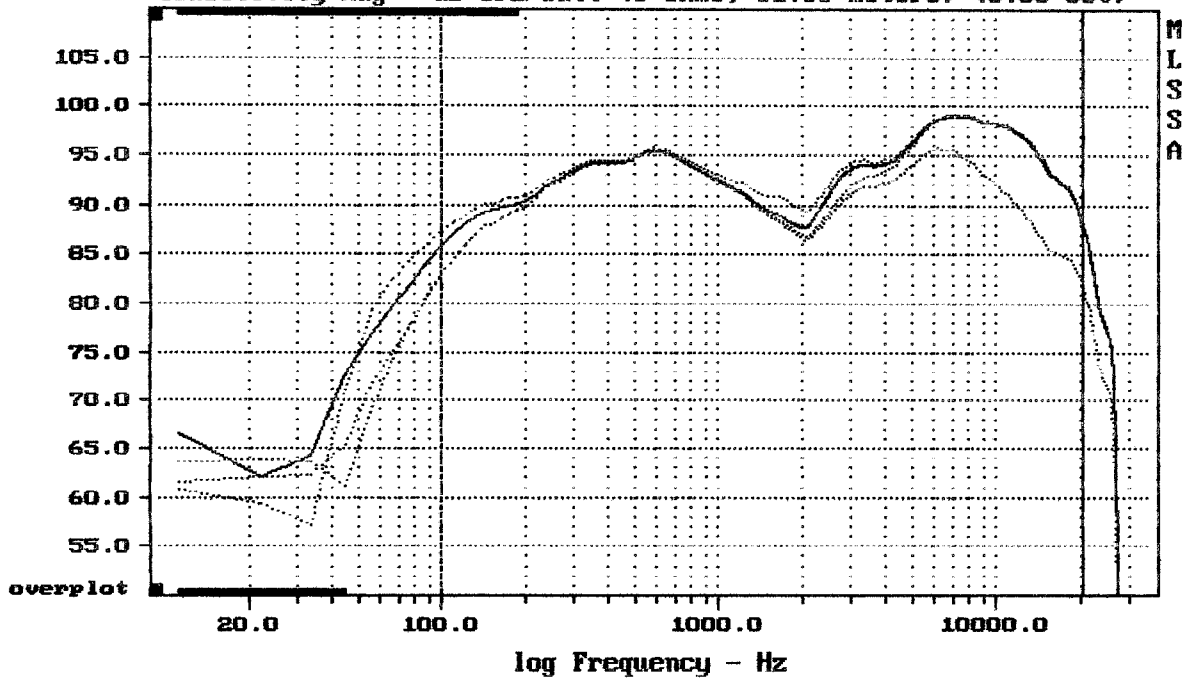


Overlay Compare: dev= +0.51/-2.8, std= 0.47, avg= -0.17

SRM350 U3

MLSSA: Frequency Domain


Sensitivity Phase - deg (dly:0.43 ms)

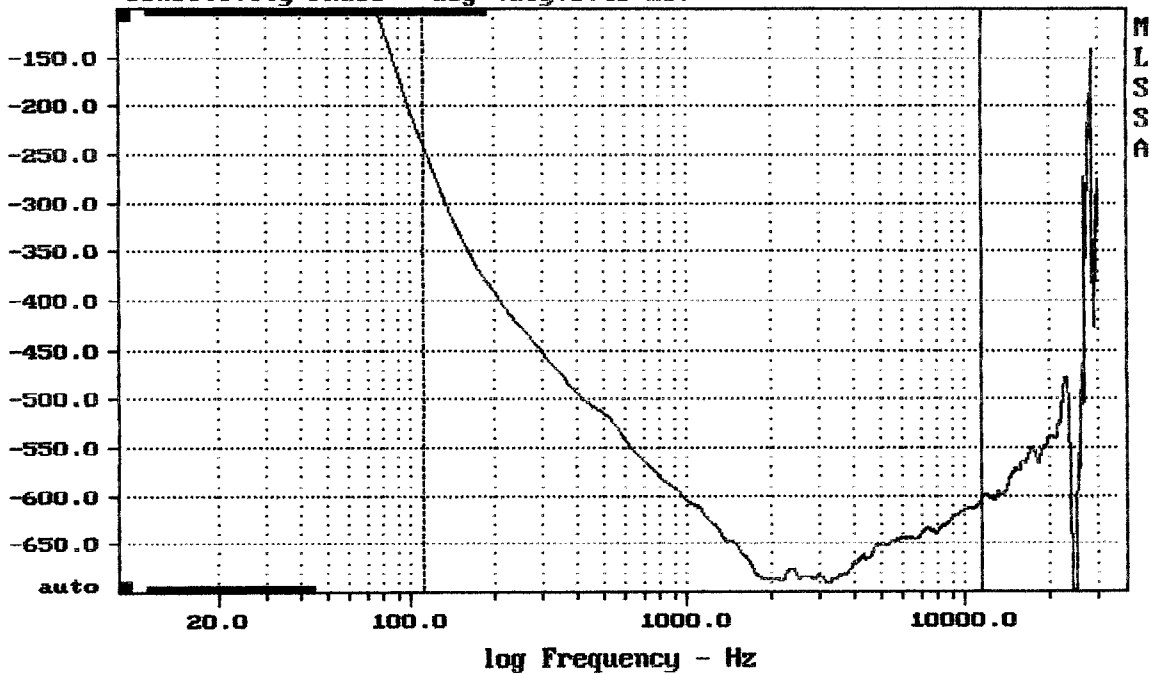

mean: -634.7, rms: 636.7, std: 50.02, max: -241.1, min: -690.6

SRM350 U3


MLSSA: Frequency Domain

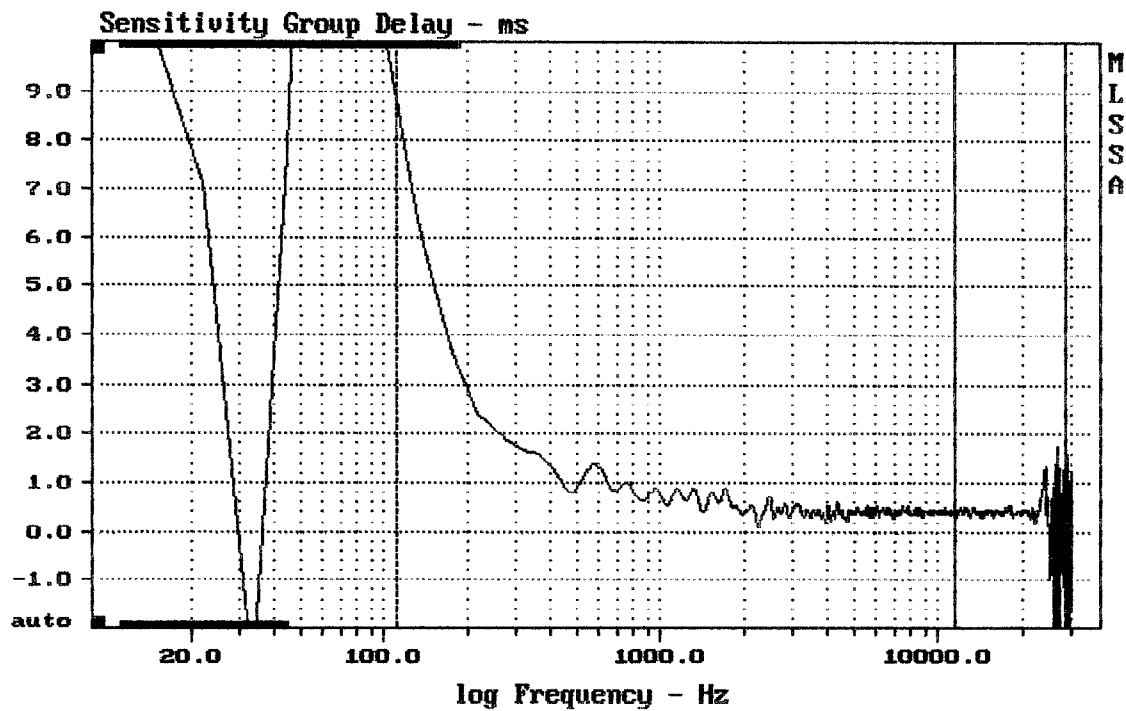

mean: 0.5243, rms: 0.751, std: 0.5378, max: 8.827, min: 0.09086

SRM350 U3

MLSSA: Frequency Domain

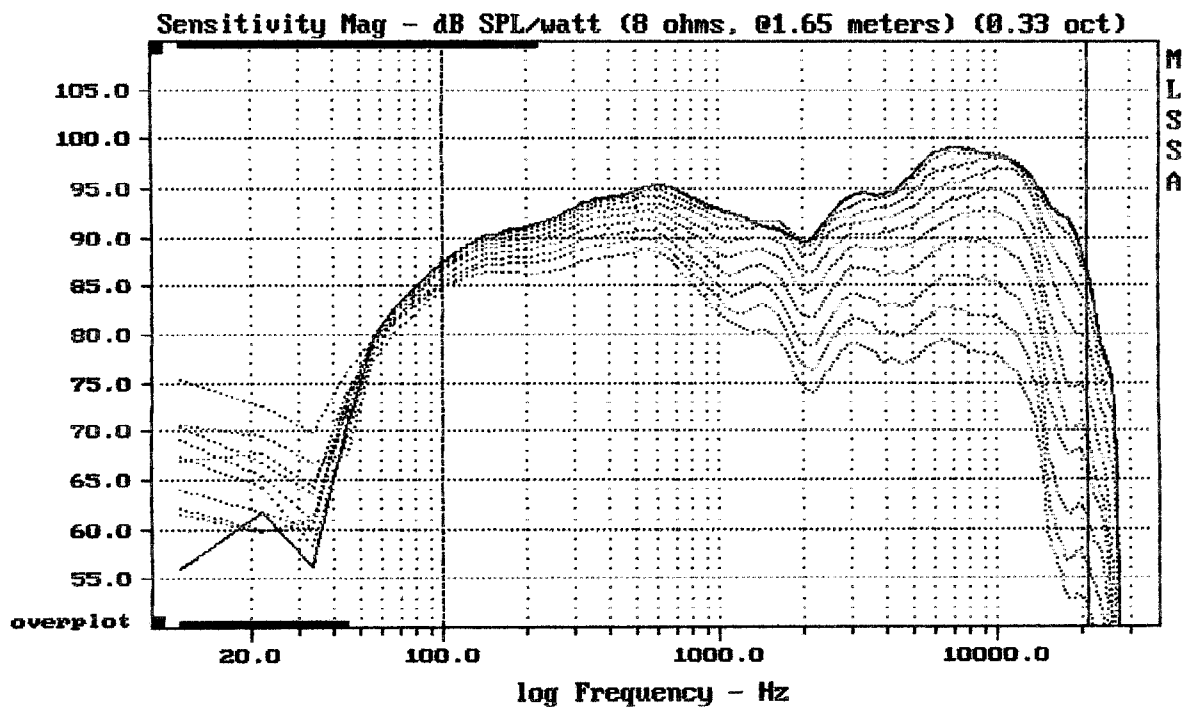


Overlay Compare: dev= +21/-15, std= 9, avg= -24

SRM350 U3

MLSSA: Frequency Domain


Sensitivity Mag - dB SPL/watt (8 ohms, @1.65 meters) (0.33 oct)

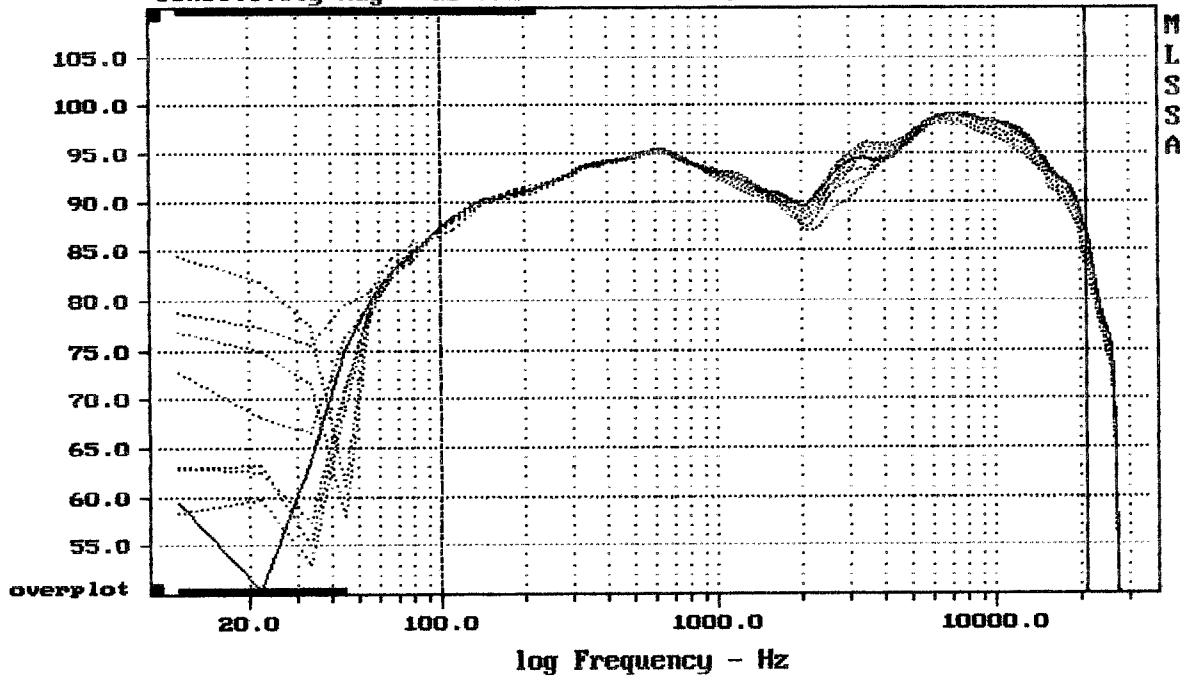

mean: 94.09, rms: 94.66, std: 2.77, max: 98.29, min: 83.47


SRM350 V3

MLSSA: Frequency Domain

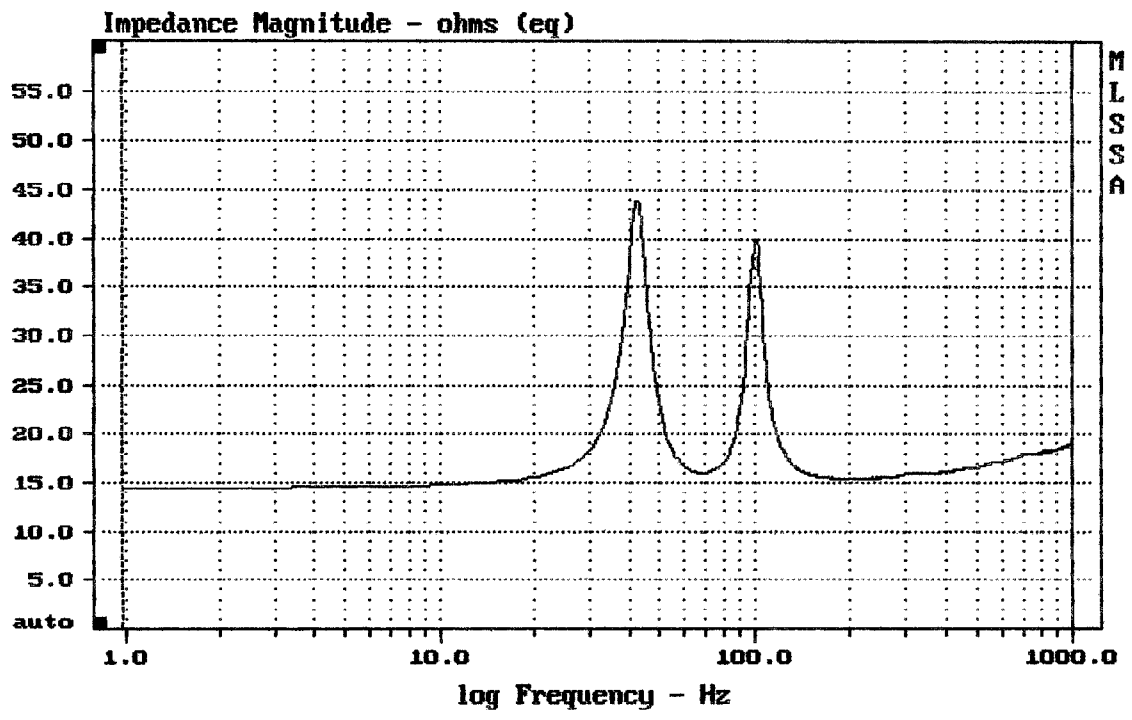


SIM350 V3

MLSSA: Frequency Domain

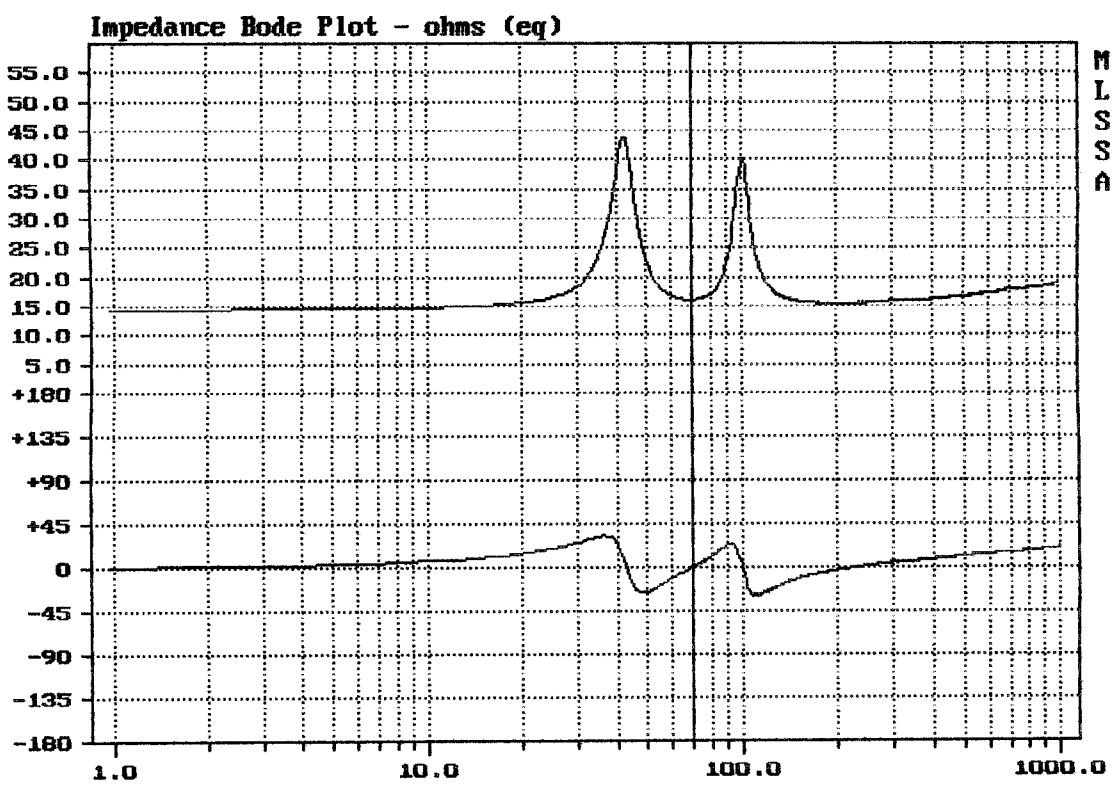

mag= 16.1, phase= 0.3 deg, 69.336 Hz (71)


DTTO

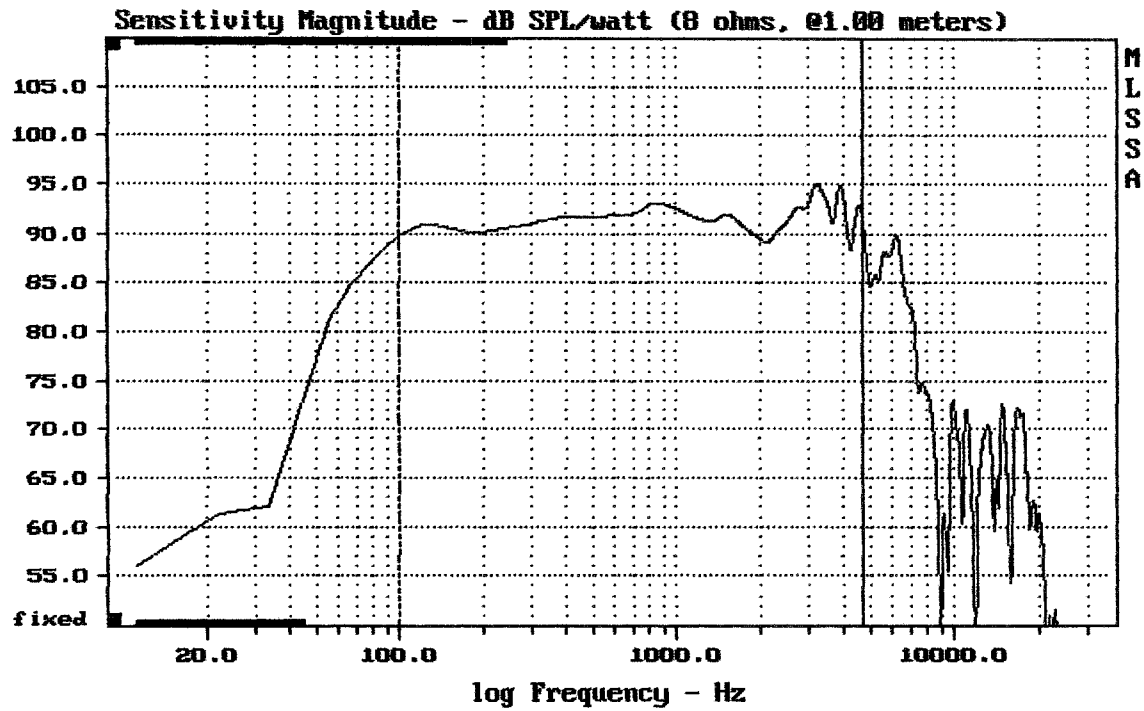

Level (100:4705 Hz) = 91.56 dB SPL/watt (8 ohms, @1.00 meters)

SRM350 V3

MLSSA: Frequency Domain

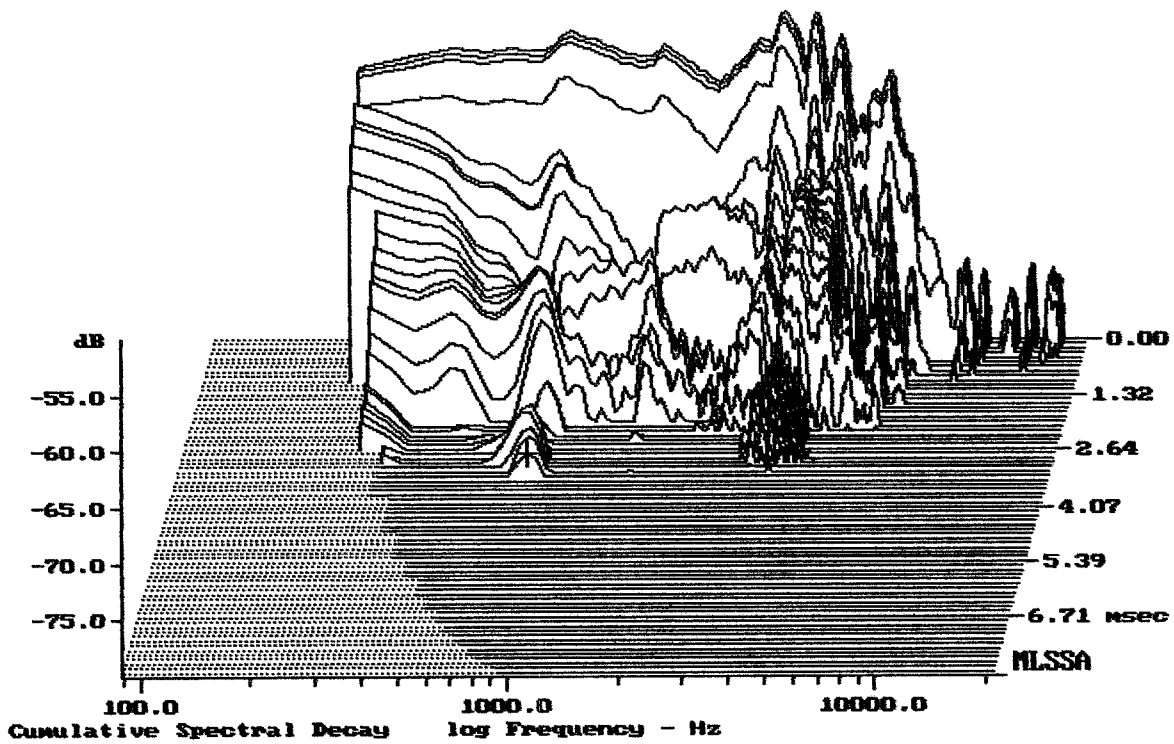

-77.98 dB, 799 Hz (18), 3.300 msec (31)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.20	Ohms
2	Fs	60.26	Hz
3	Re	5.48	Ohms[dc]
4	Res	45.62	Ohms
5	Qms	5.19	
6	Qes	0.62	
7	Qts	0.56	
8	L1	0.75	mH
9	L2	1.13	mH
10	R2	4.38	Ohms
11	RMSE-load	0.43	Ohms
12	Vas(Sd)	39.45	liters
13	Mms	29.79	grams
14	Cms	234	$\mu\text{M}/\text{Newton}$
15	B1	9.96	Tesla-M
16	SPLref(Sd)	93.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.7% (-20% to -50% is recommended).

SRM350 V3

MLSSA: Parameters

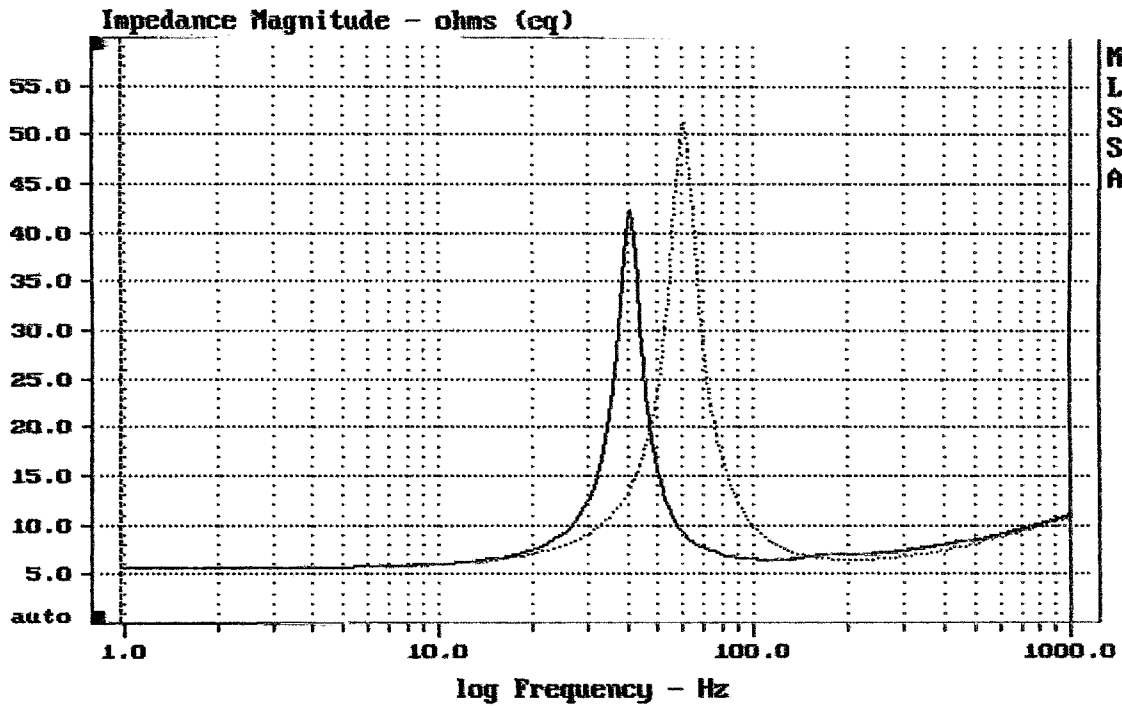

mean: 9.388, rms: 10.6, std: 4.927, max: 51.27, min: 5.59

MLSSA: Frequency Domain