



mean: 104.40, rms: 105.00, std: 2.84, max: 110.88, min: 81.41

RCF TT22A

MLSSA: Frequency Domain

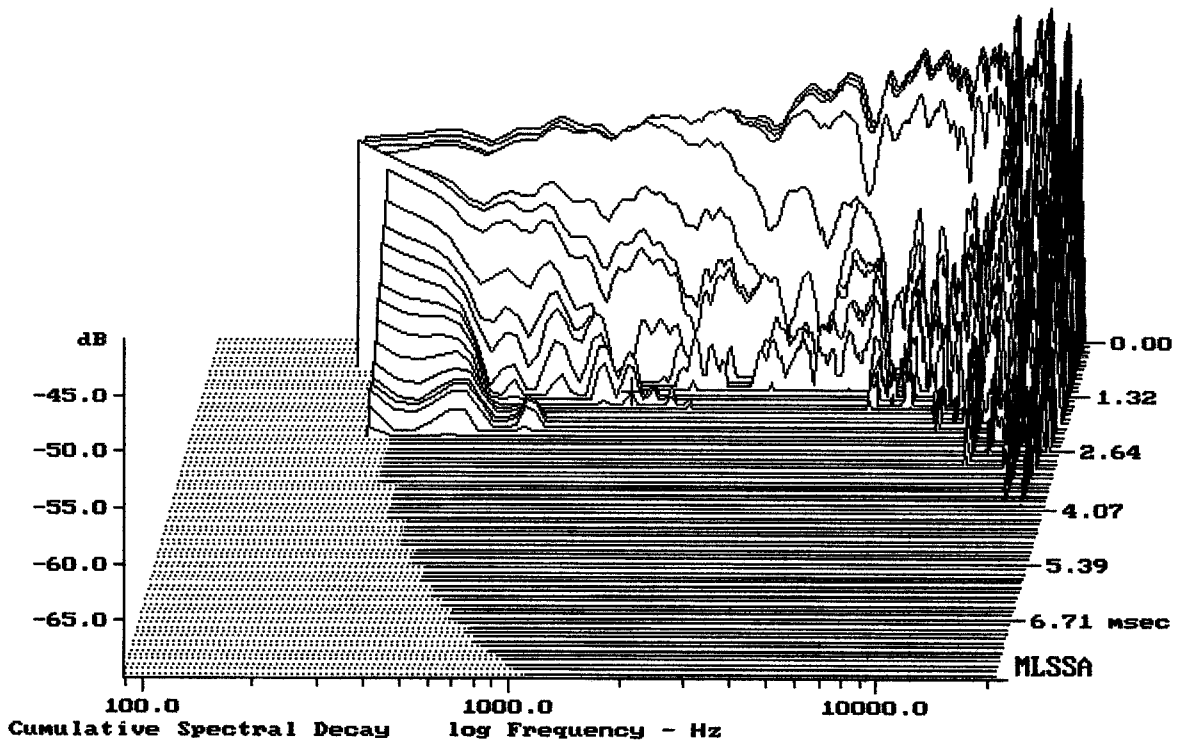


-68.80 dB, 1332 Hz (30), 1.540 msec (15)

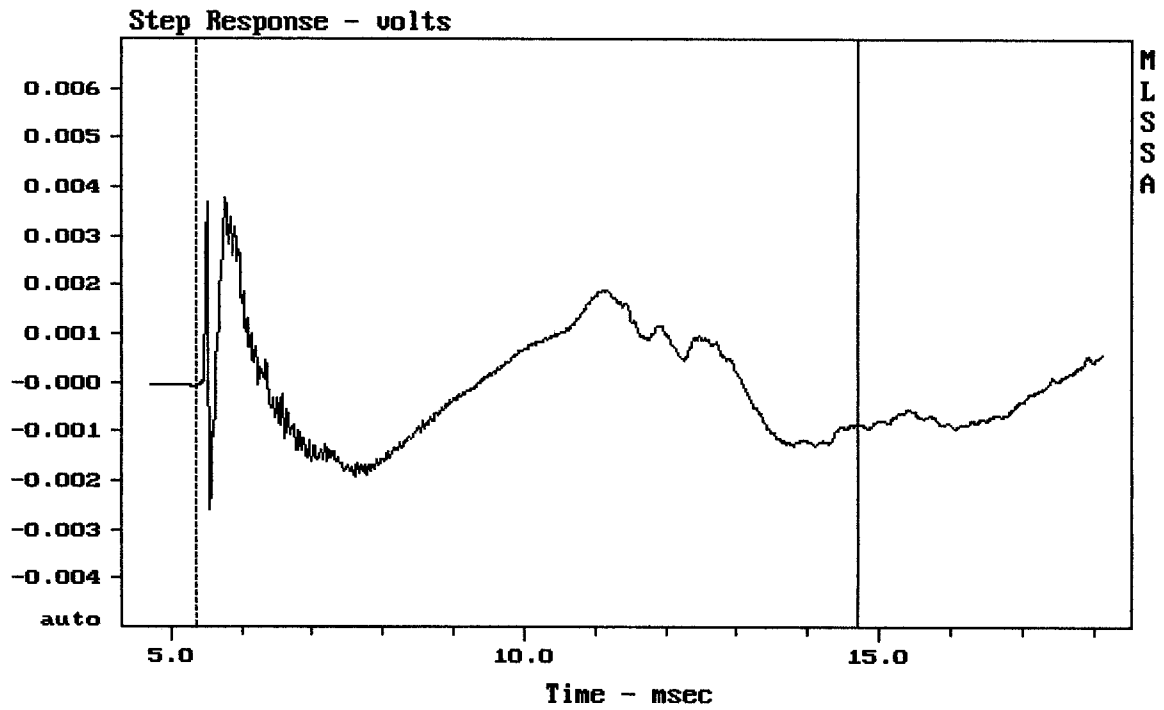

mean:  $-2.965e-005$ , rms: 0.001204, std: 0.001203, max: 0.003756, min: -0.002596


RCF TT22A

MLSSA: Time Domain

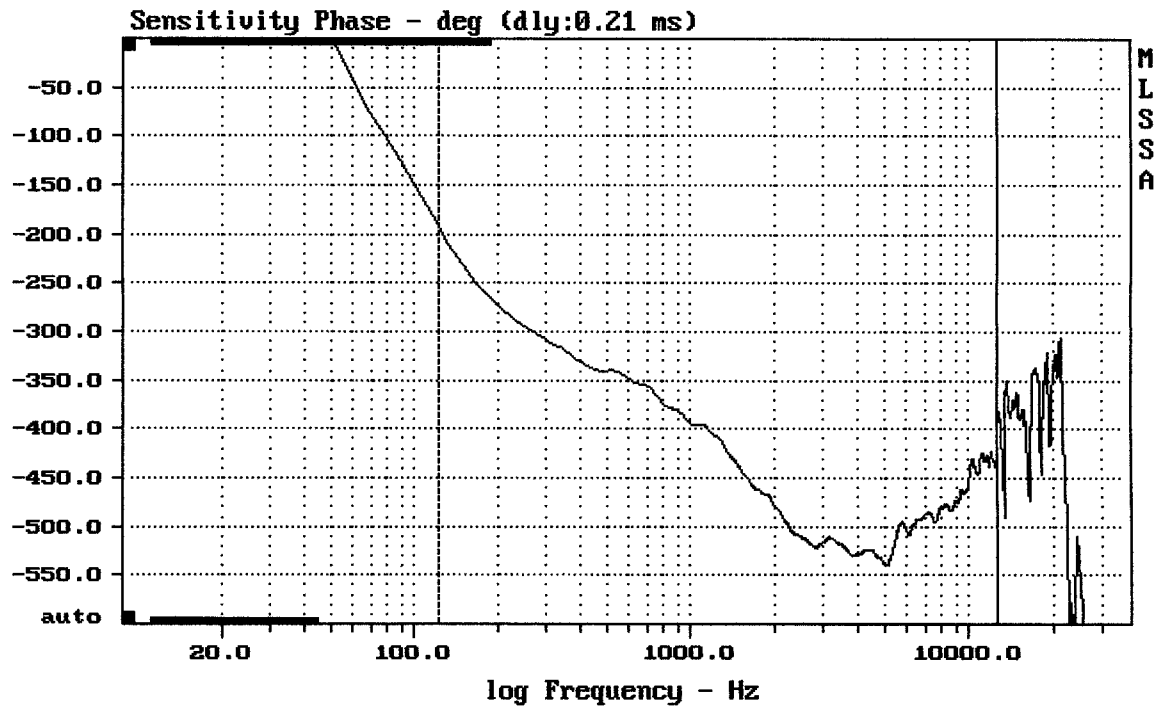


mean: -469.7, rms: 472.5, std: 52.08, max: -191.8, min: -540

RCF TT22A

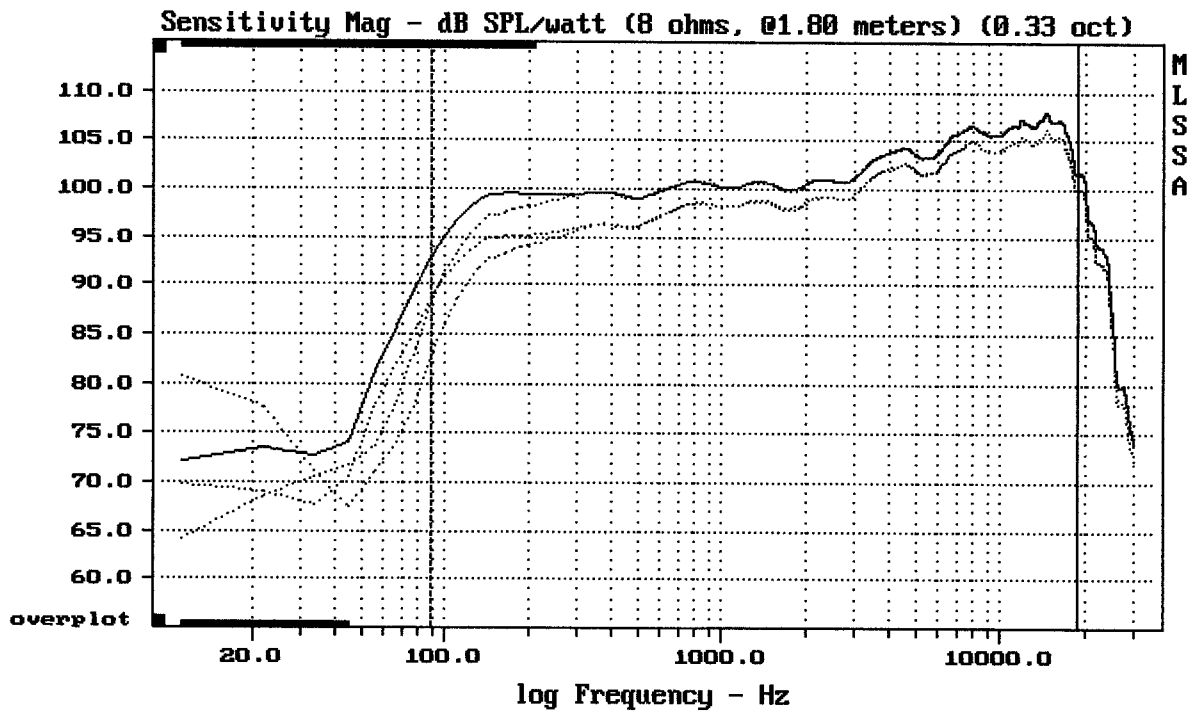


RCF TT22A

MLSSA: Frequency Domain

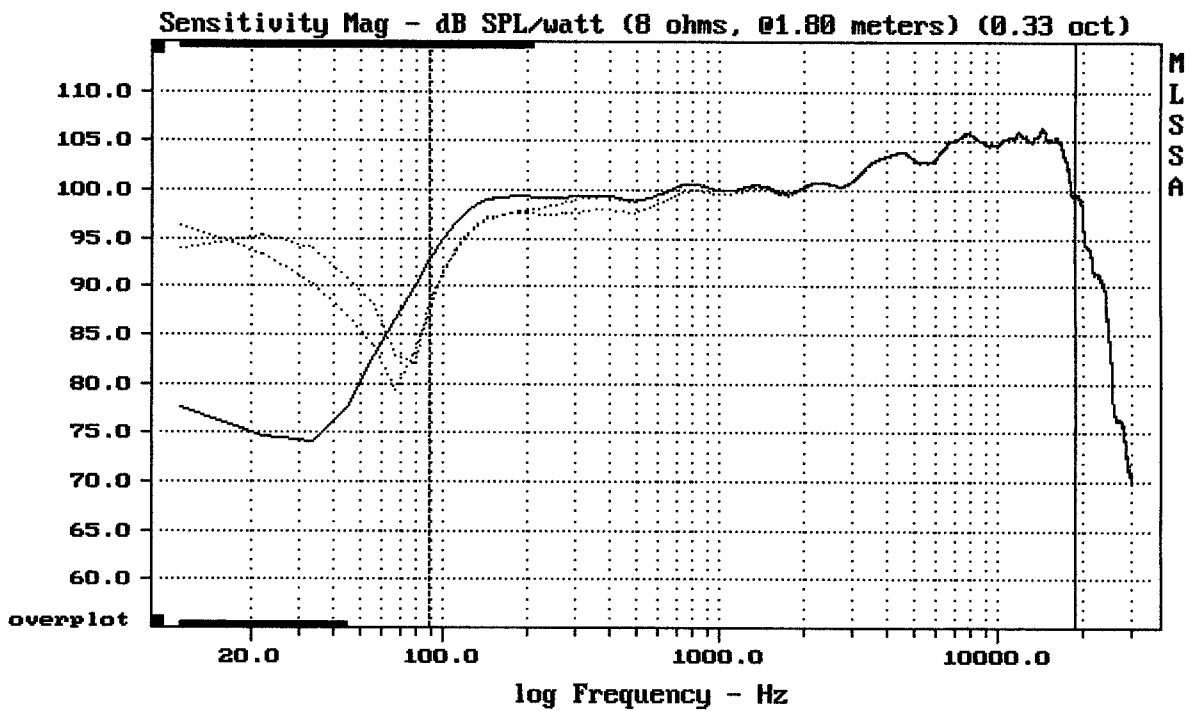


RCF TT22A

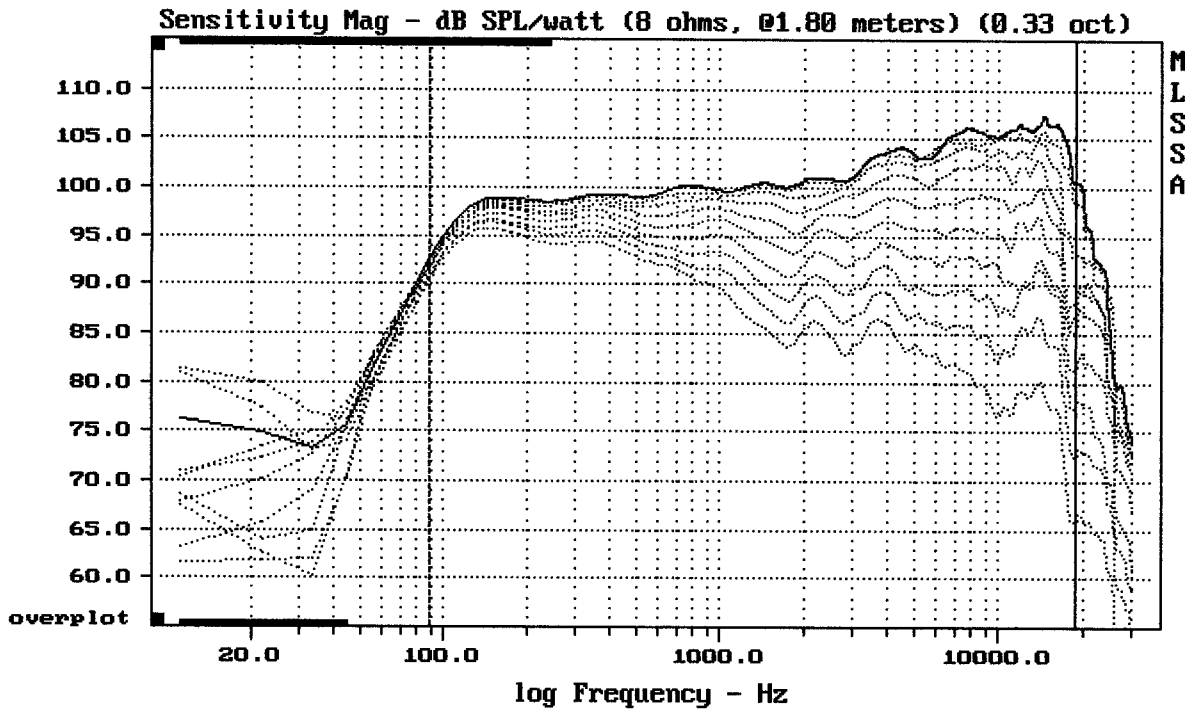

Overlay Compare: dev= +22/-12, std= 7, avg= -24


RCF TT22A

MLSSA: Frequency Domain

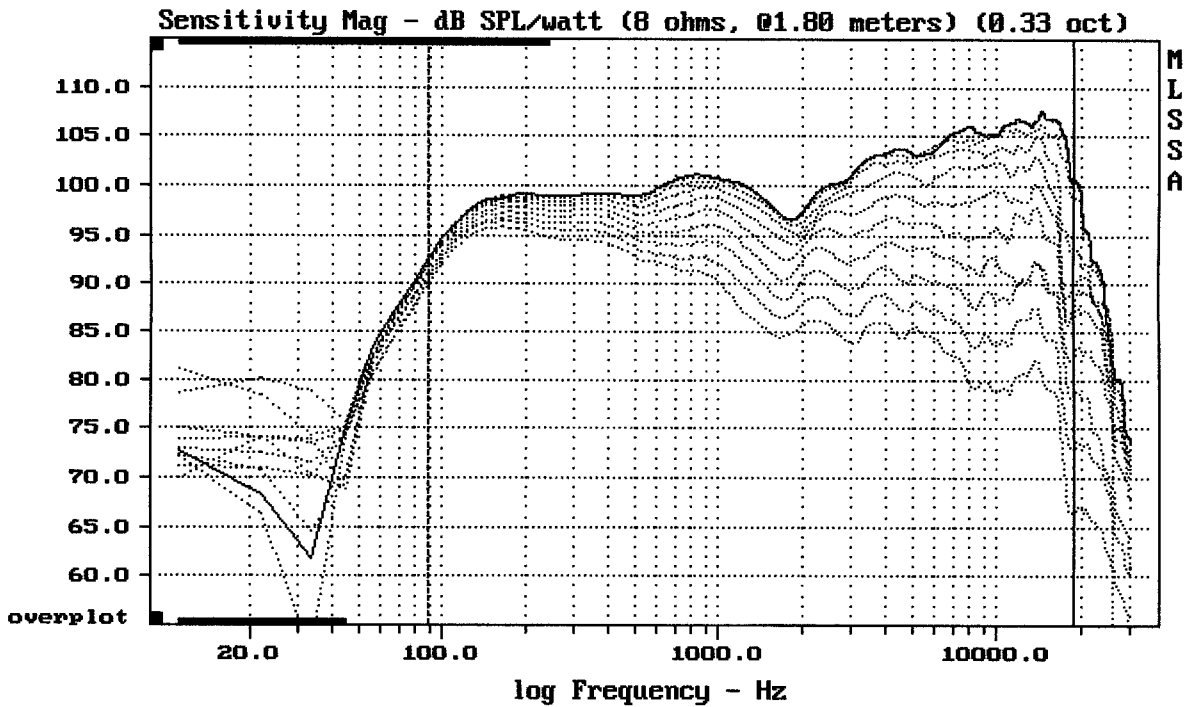

Overlay Compare: dev= +21/-13, std= 7, avg= -23


RCF TT22A

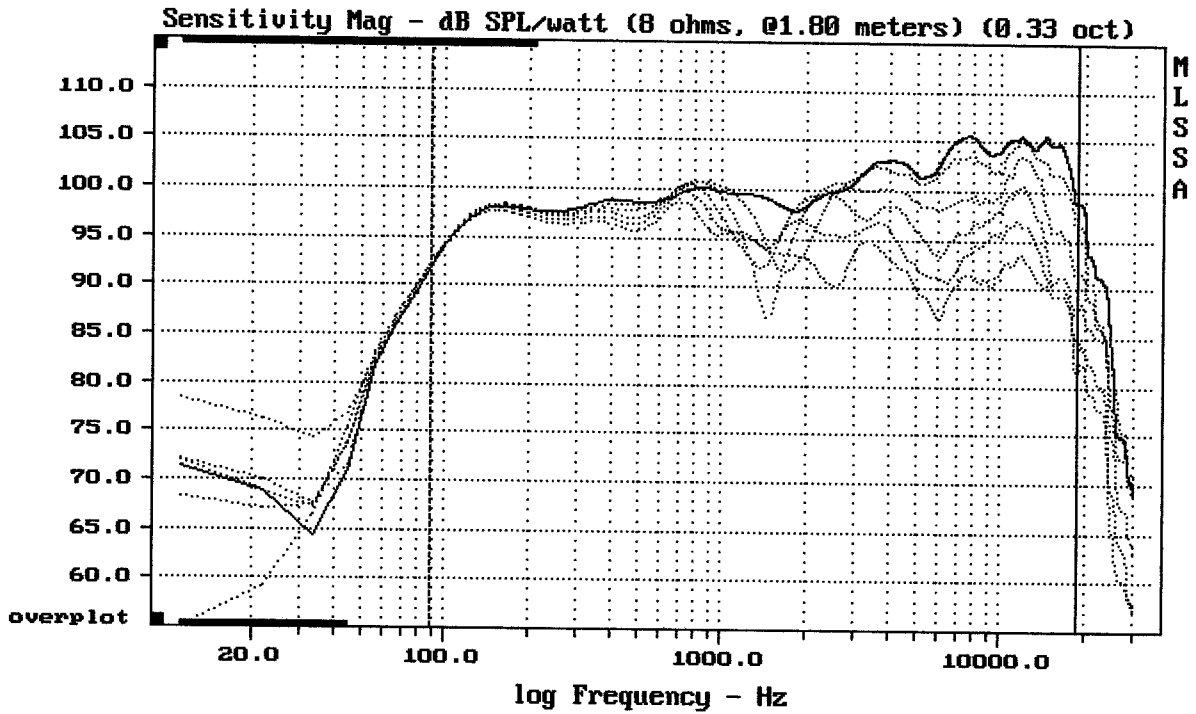

Overlay Compare: dev= +12/-5.3, std= 3.7, avg= -12


RCF TT22A

MLSSA: Frequency Domain

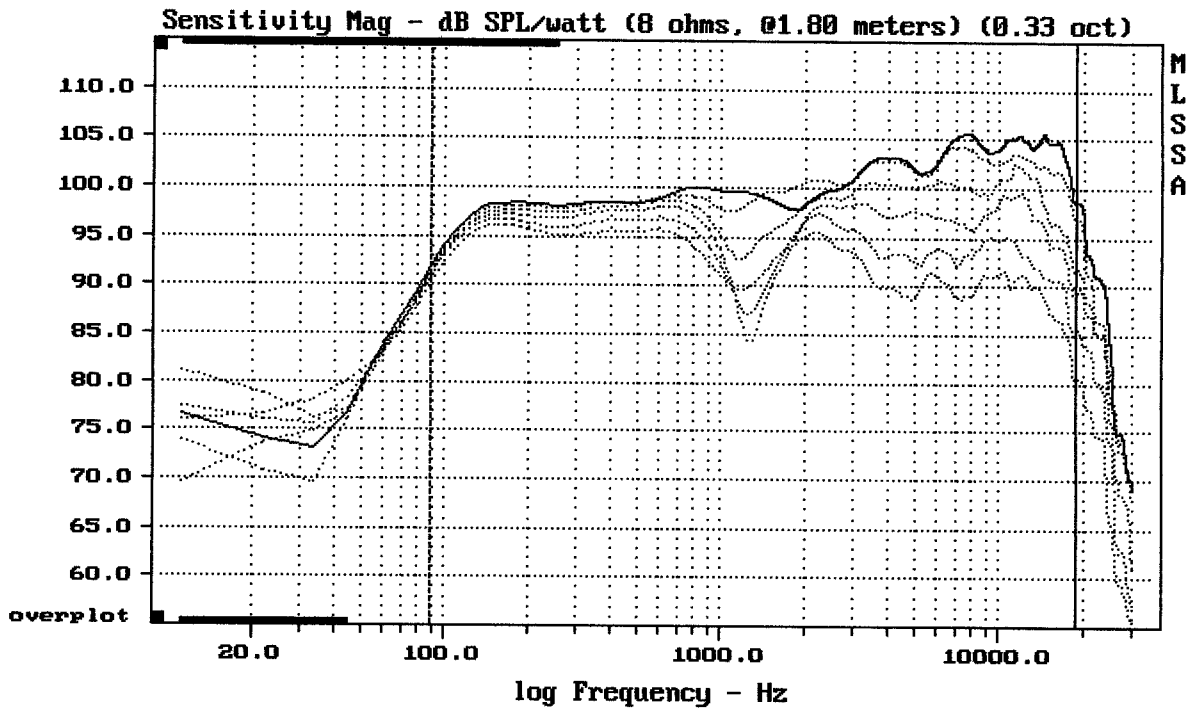

Overlay Compare: dev= +12/-5.1, std= 4.1, avg= -13


RCF TT22A

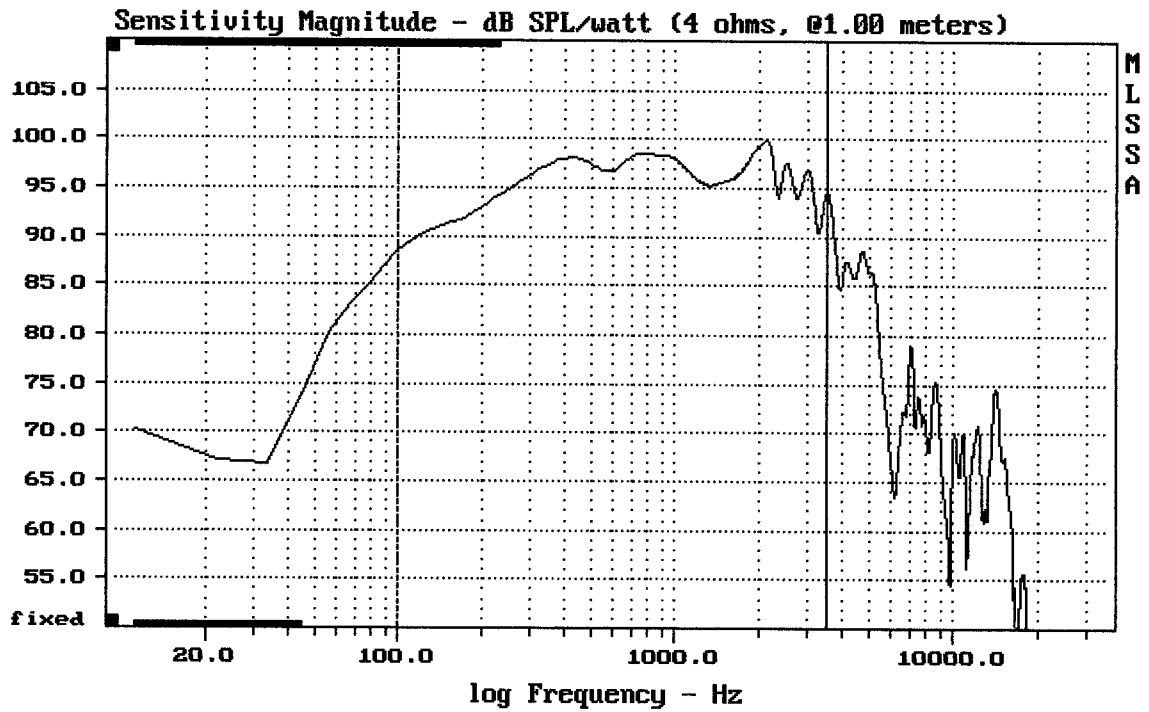

Level (100:3496 Hz) = 96.20 dB SPL/watt (4 ohms, @1.00 meters)

12" RCF FROM TT22A

MLSSA: Frequency Domain

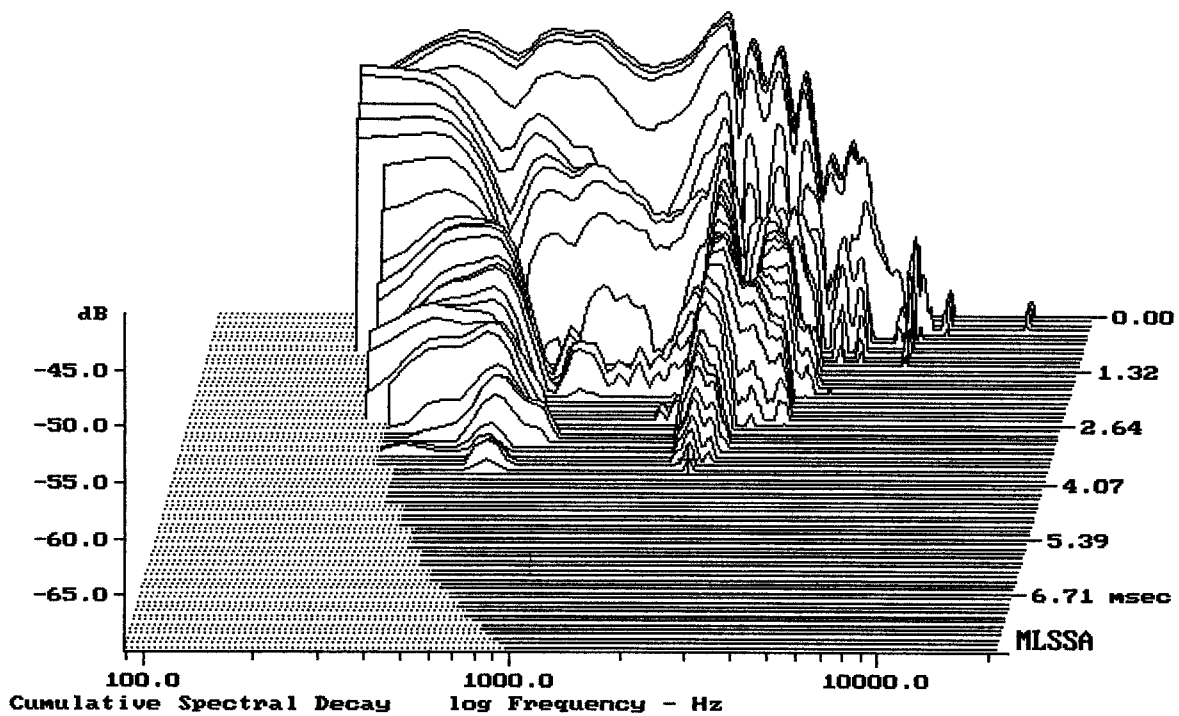

-68.97 dB, 2219 Hz (50), 3.740 msec (35)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.44	Ohms
2	Fs	67.17	Hz
3	Re	3.67	Ohms[dc]
4	Res	124.79	Ohms
5	Qms	7.85	
6	Qes	0.23	
7	Qts	0.22	
8	L1	0.69	mH
9	L2	1.06	mH
10	R2	3.57	Ohms
11	RMSE-load	0.95	Ohms
12	Vas(Sd)	44.49	liters
13	Mms	49.96	grams
14	Cms	112	$\mu\text{M}/\text{Newton}$
15	Bl	18.31	Tesla-M
16	SPLref(Sd)	99.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.4% (-20% to -50% is recommended).

12" RCF FROM TT22A

MLSSA: Parameters

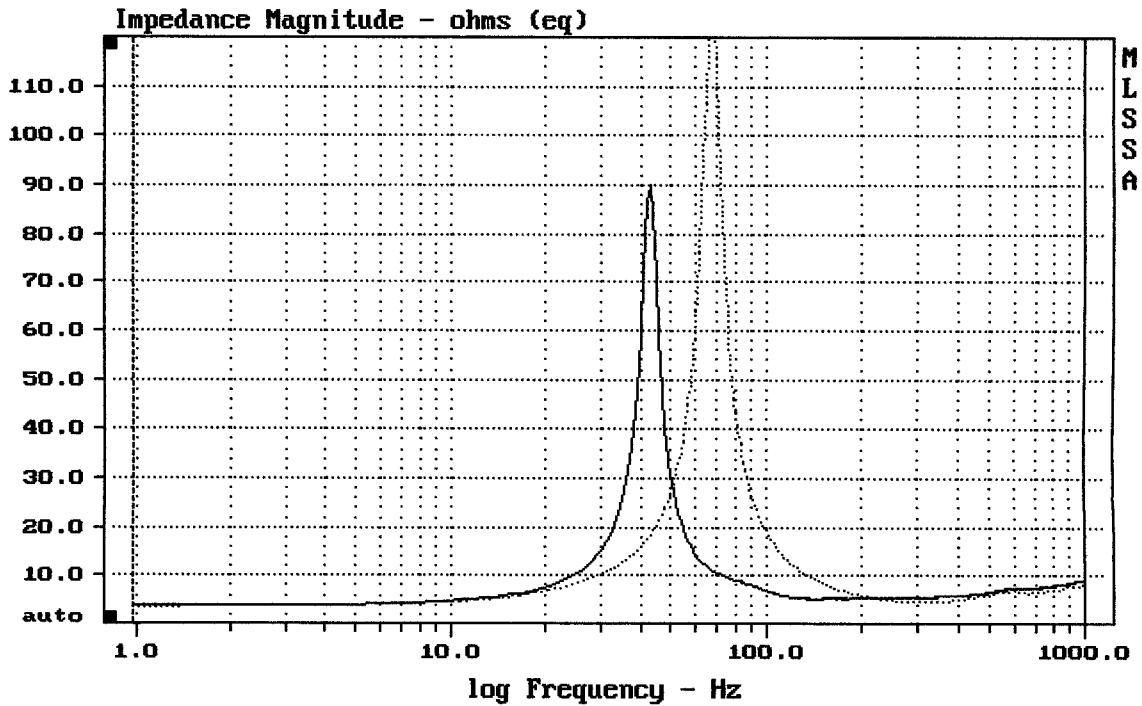

mean: 9.221, rms: 15.73, std: 12.74, max: 129.9, min: 3.633

MLSSA: Frequency Domain