



mean: 95.47, rms: 95.77, std: 2.06, max: 100.08, min: 81.28

RCF TT08-A

MLSSA: Frequency Domain

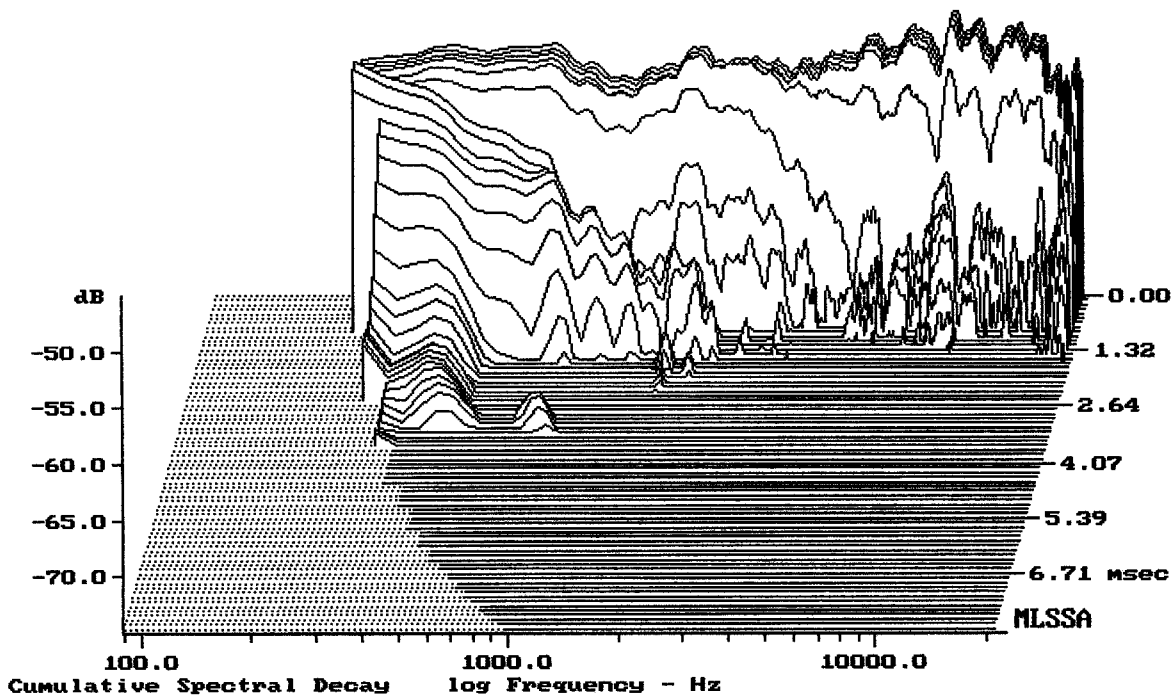


-74.31 dB, 1687 Hz (38), 1.980 msec (19)

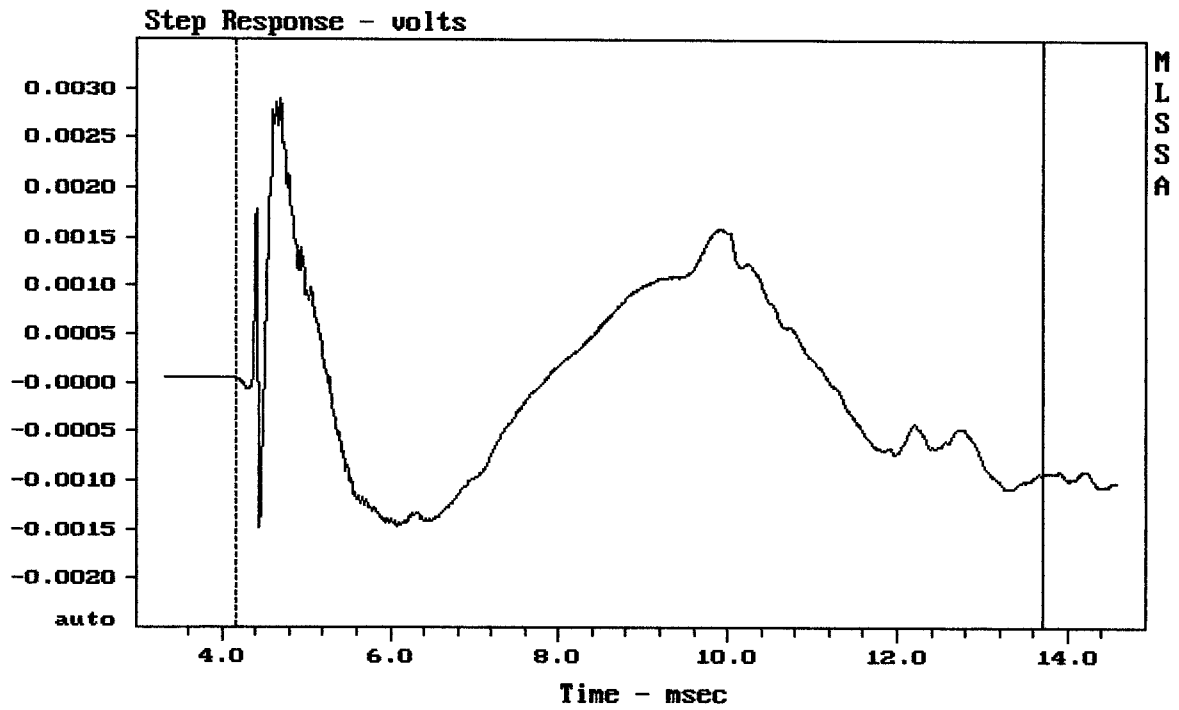

mean: $-2.533e-005$, rms: 0.0009774, std: 0.0009771, max: 0.002901, min: -0.0014


RCF TT08-A

MLSSA: Time Domain

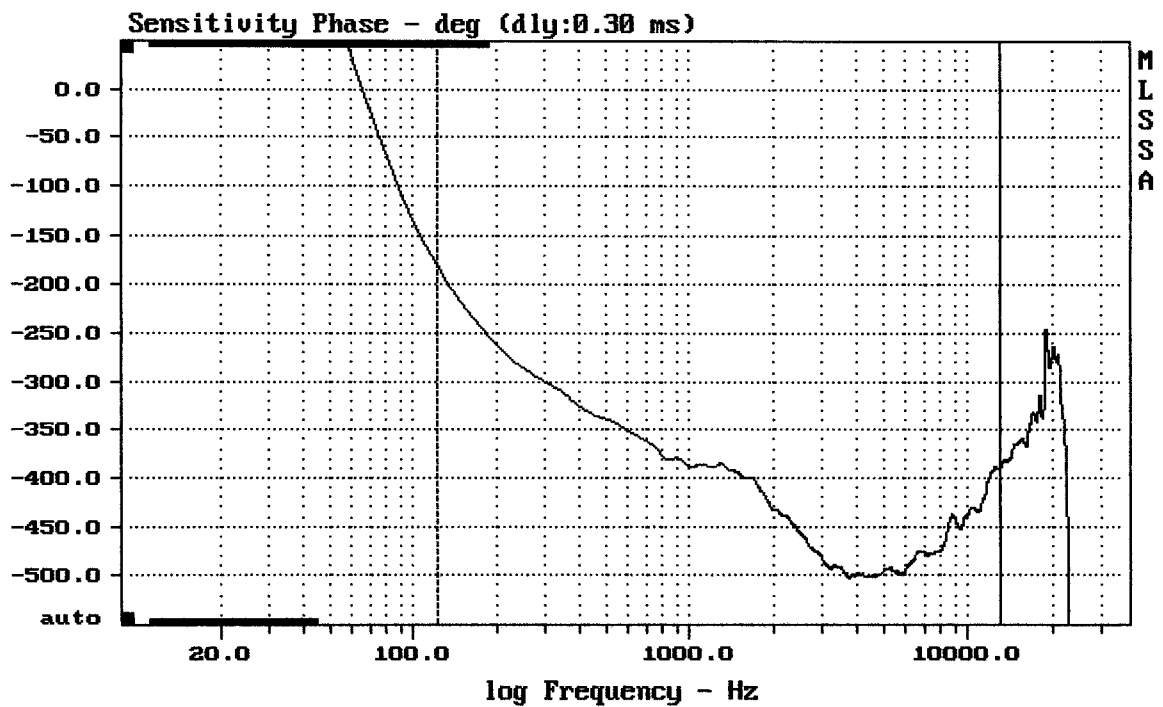

mean: -444.8, rms: 447.5, std: 48.54, max: -180, min: -502.3


RCF TT08-A

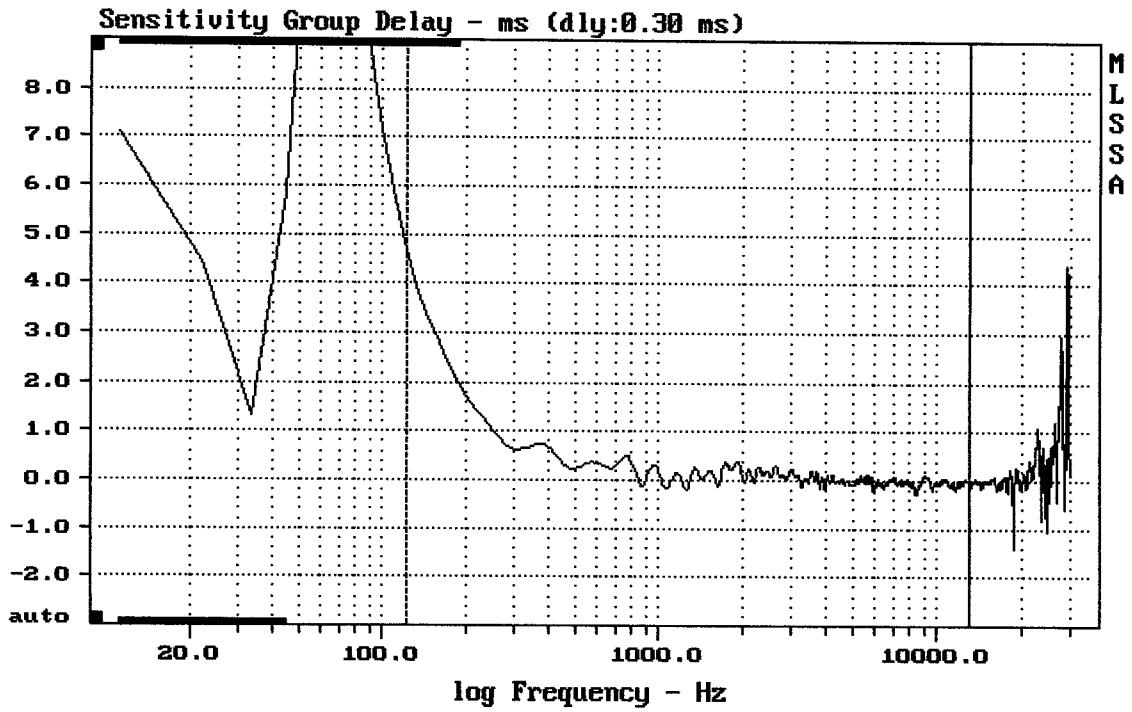

mean: 0.04658, rms: 0.3056, std: 0.3021, max: 4.675, min: -0.2791


RCF TT08-A

MLSSA: Frequency Domain

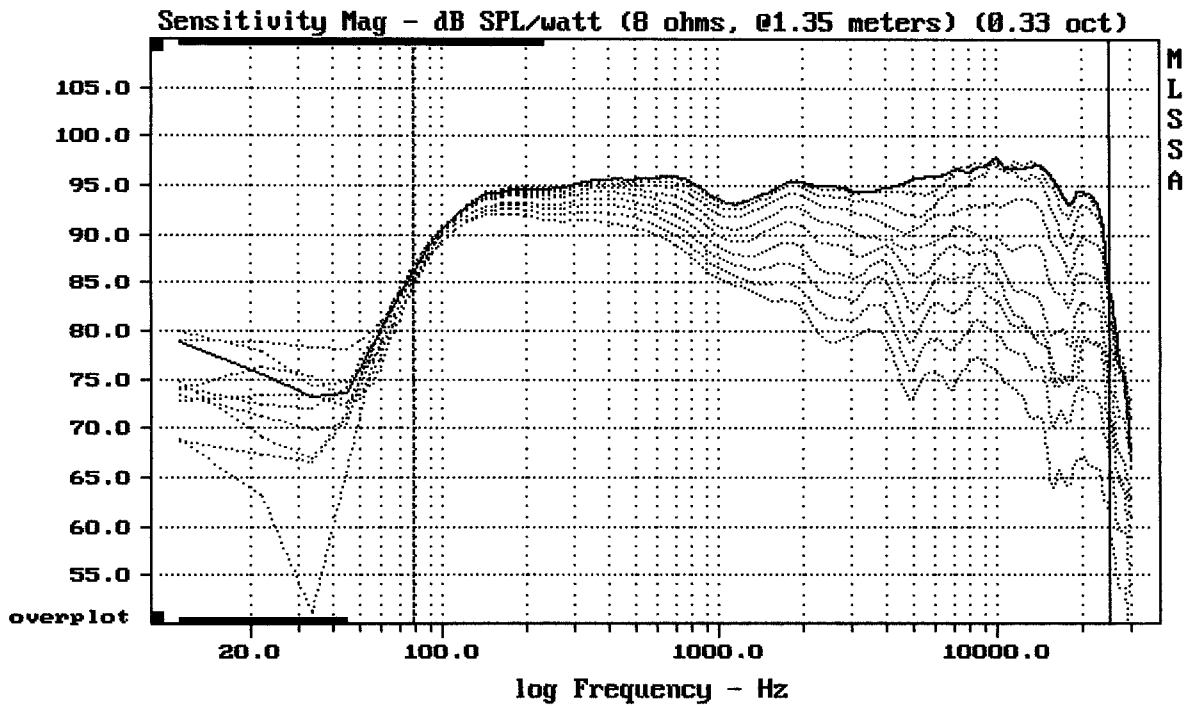

Overlay Compare: dev= +22/-8.9, std= 6.1, avg= -23


RCF TT08-A

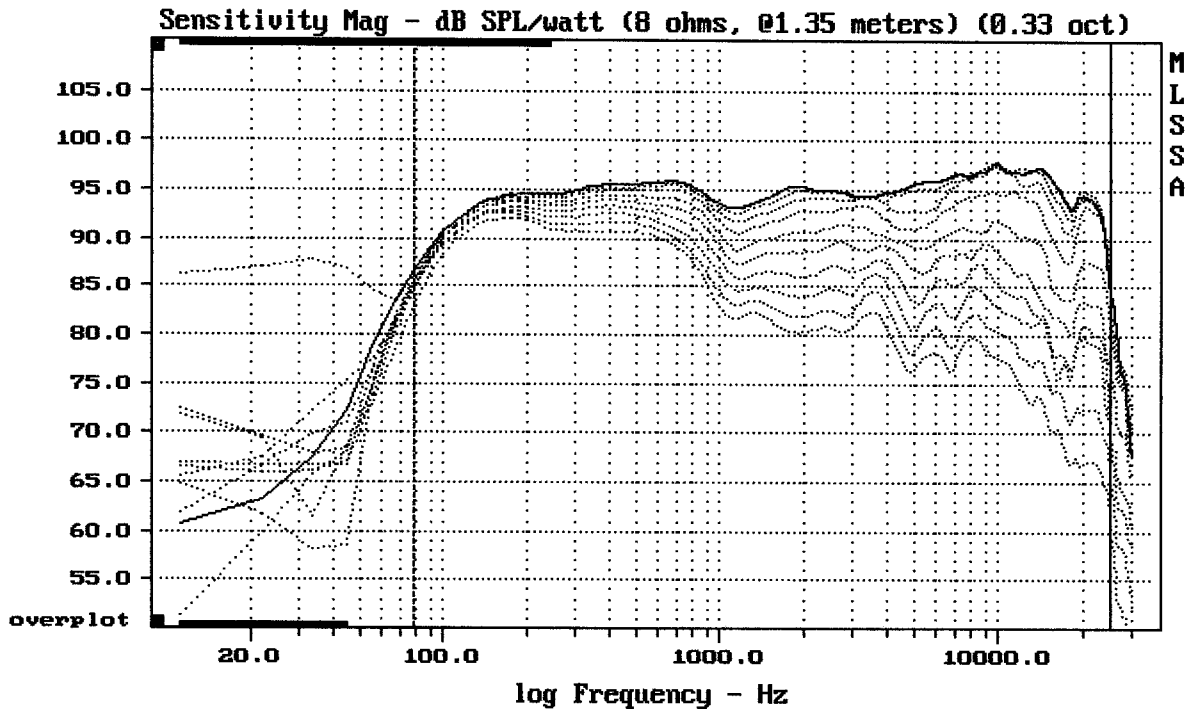

Overlay Compare: dev= +19/-6.7, std= 5.5, avg= -21


RCF TT08-A

MLSSA: Frequency Domain

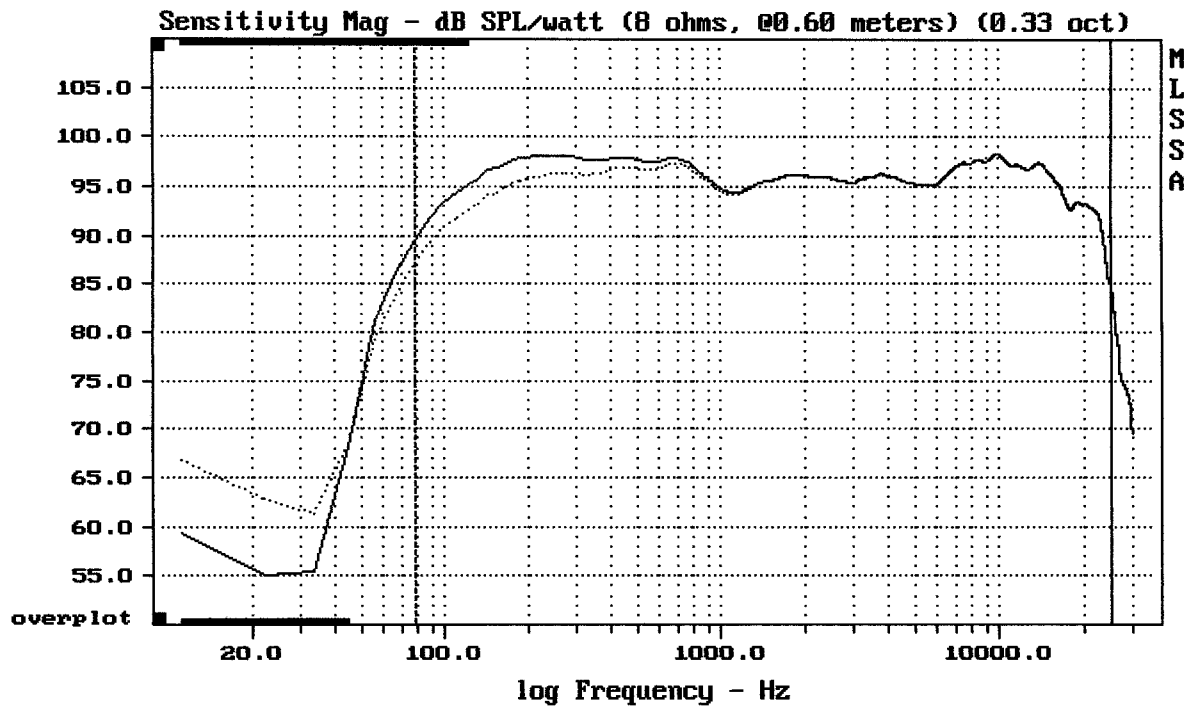

mean: 95.36, rms: 95.64, std: 1.98, max: 98.34, min: 84.95


RCF TT08-A

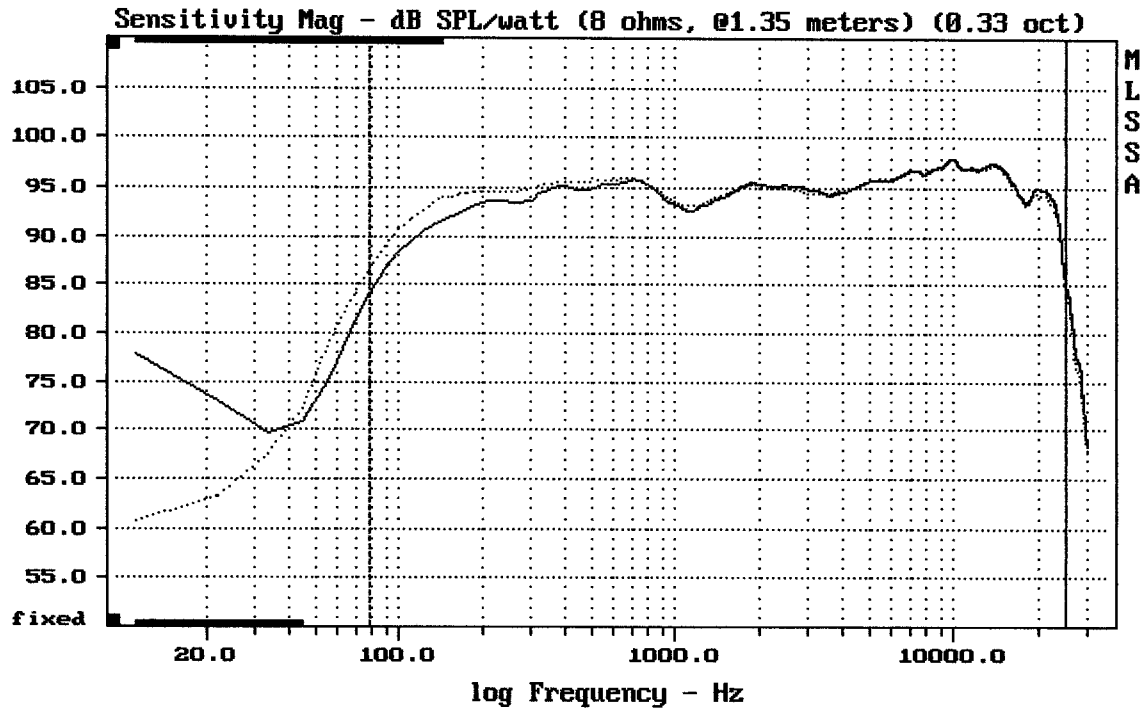

mean: 95.28, rms: 95.47, std: 1.66, max: 97.84, min: 85.01


RCF TT08-A

MLSSA: Frequency Domain

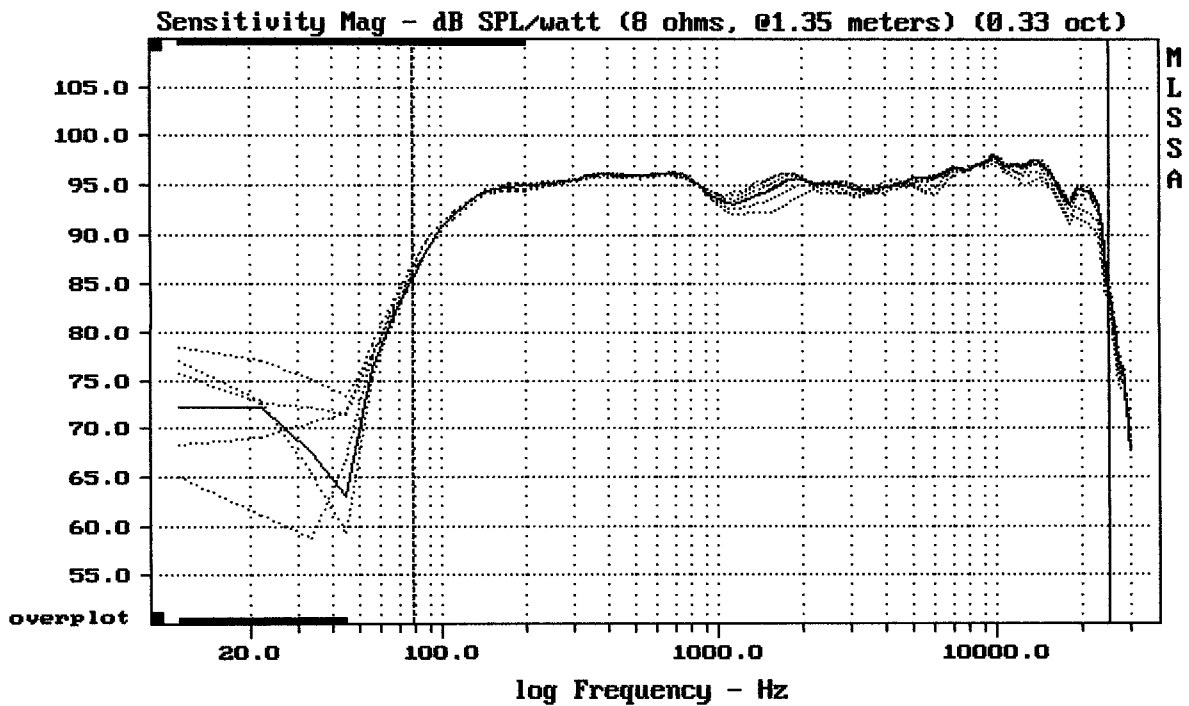

mean: 94.10, rms: 94.41, std: 2.11, max: 97.25, min: 83.39


RCF TT08-A

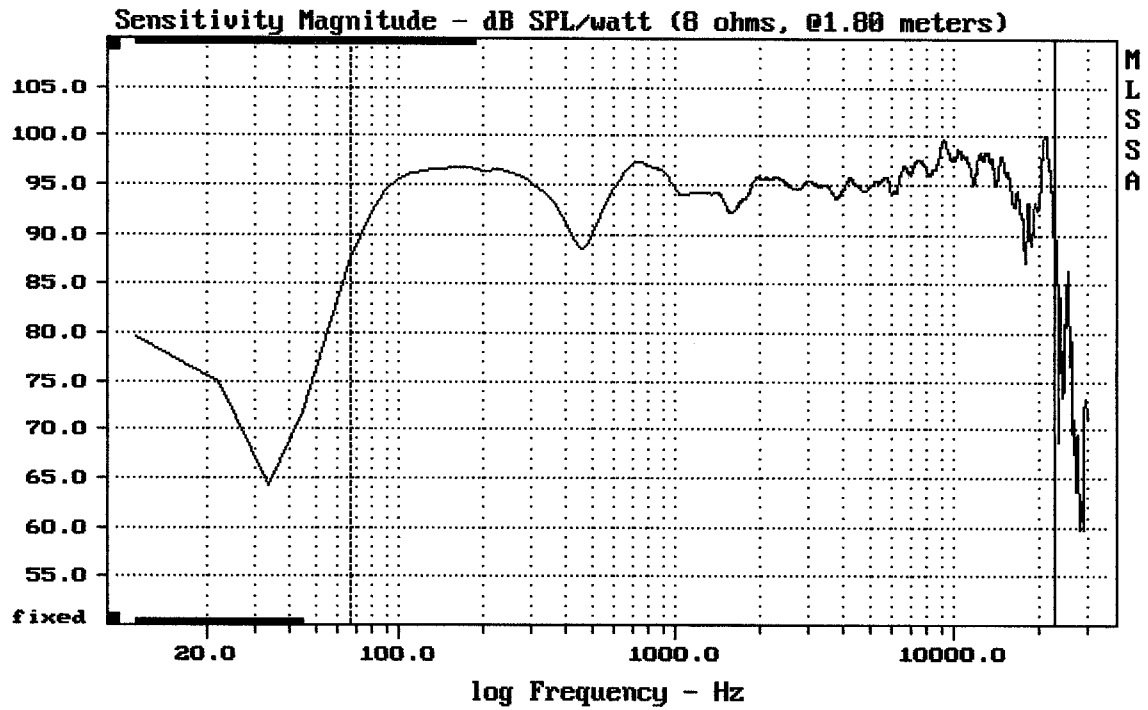


Level (67:23005 Hz) = 95.40 dB SPL/watt (8 ohms, @1.80 meters)

RCF TT08-A JAKO MONITOR

MLSSA: Frequency Domain

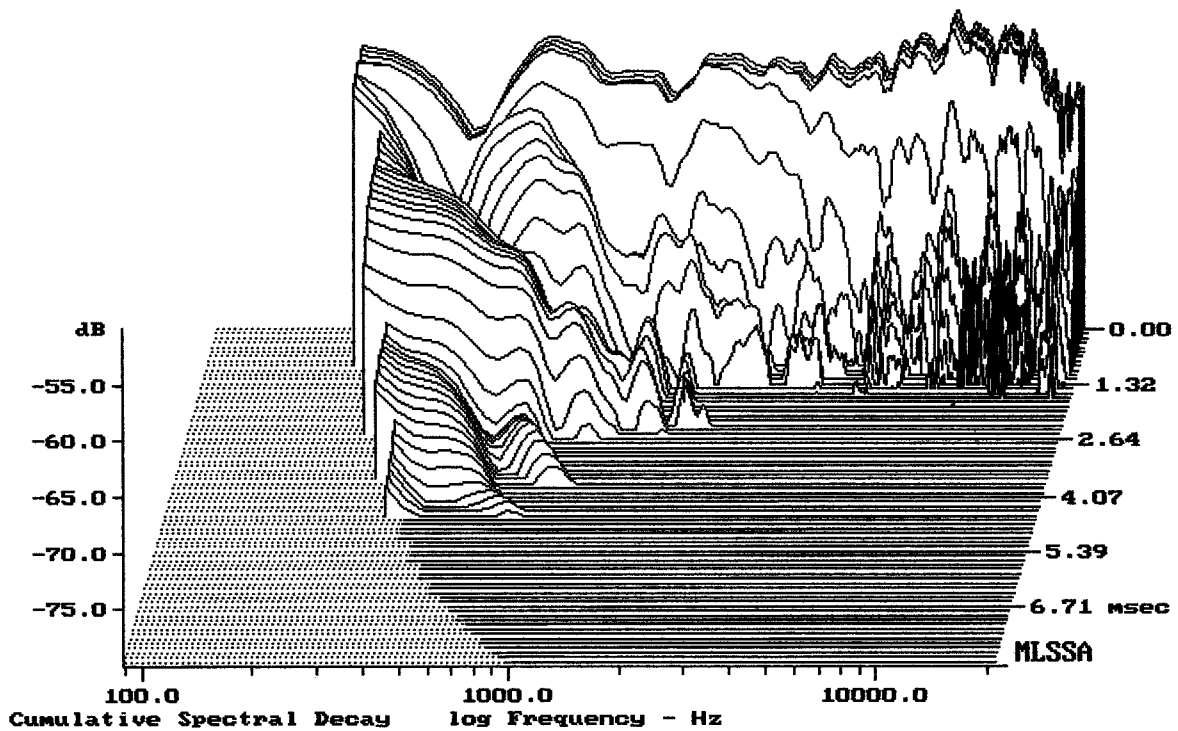


-76.76 dB, 1953 Hz (44), 2.310 msec (22)

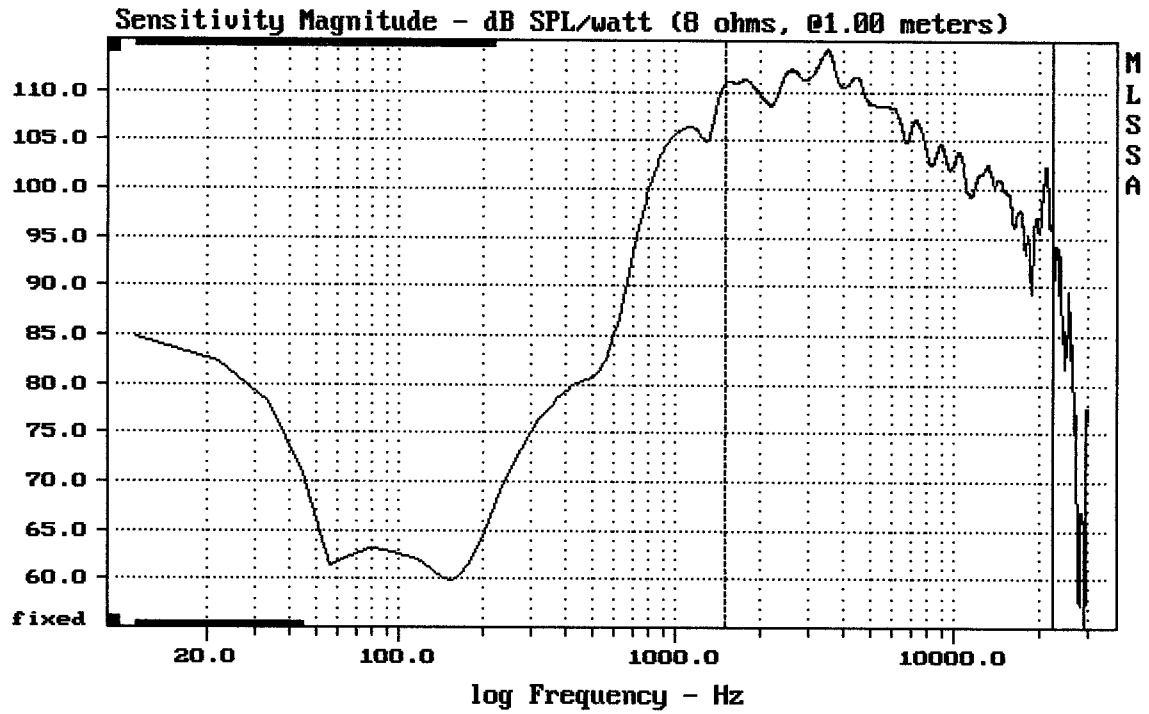


Level (1498:22505 Hz) = 108.71 dB SPL/watt (8 ohms, @1.00 meters)

ND1710MT + H101 FROM TT08-A

MLSSA: Frequency Domain

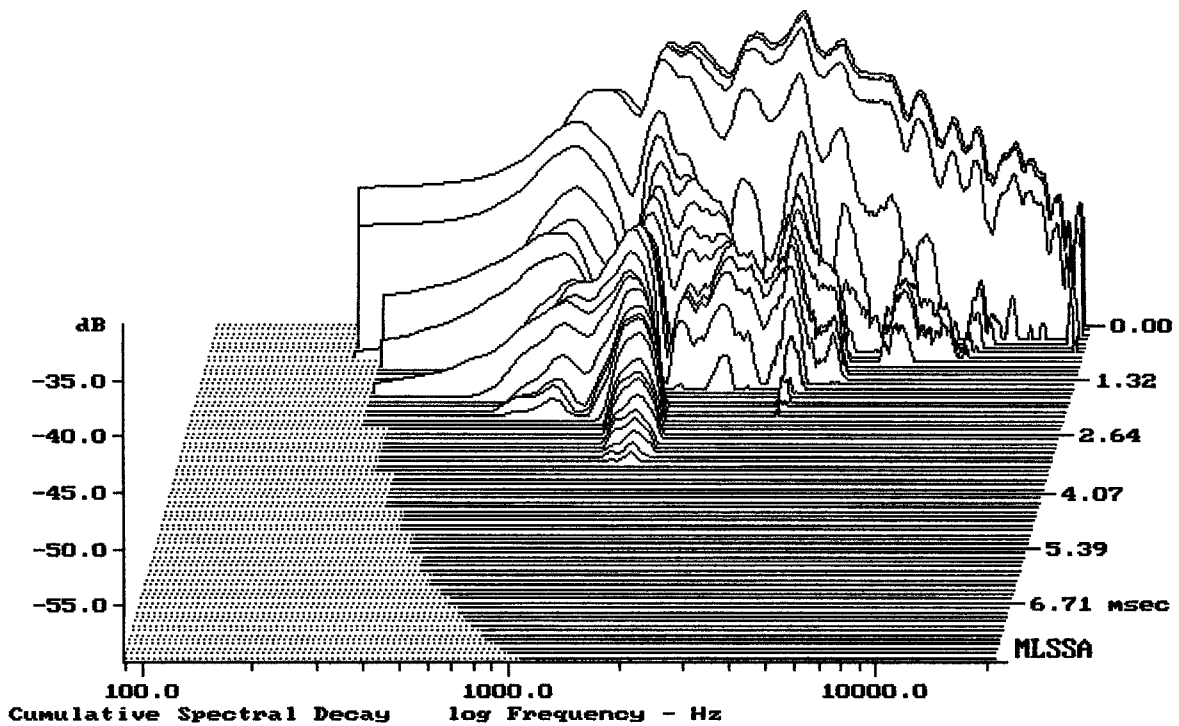


-59.65 dB, 3462 Hz (78), 1.980 msec (19)

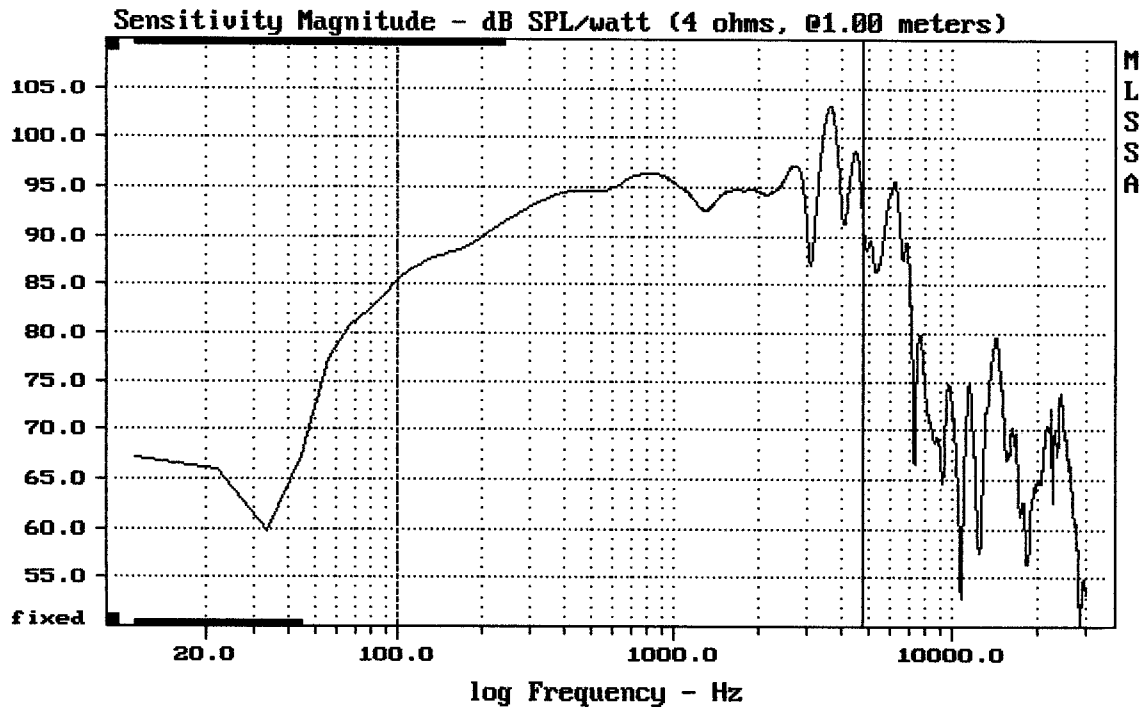

Level (100:4805 Hz) = 94.62 dB SPL/watt (4 ohms, @1.00 meters)

8" NEO FROM TT08-A

MLSSA: Frequency Domain

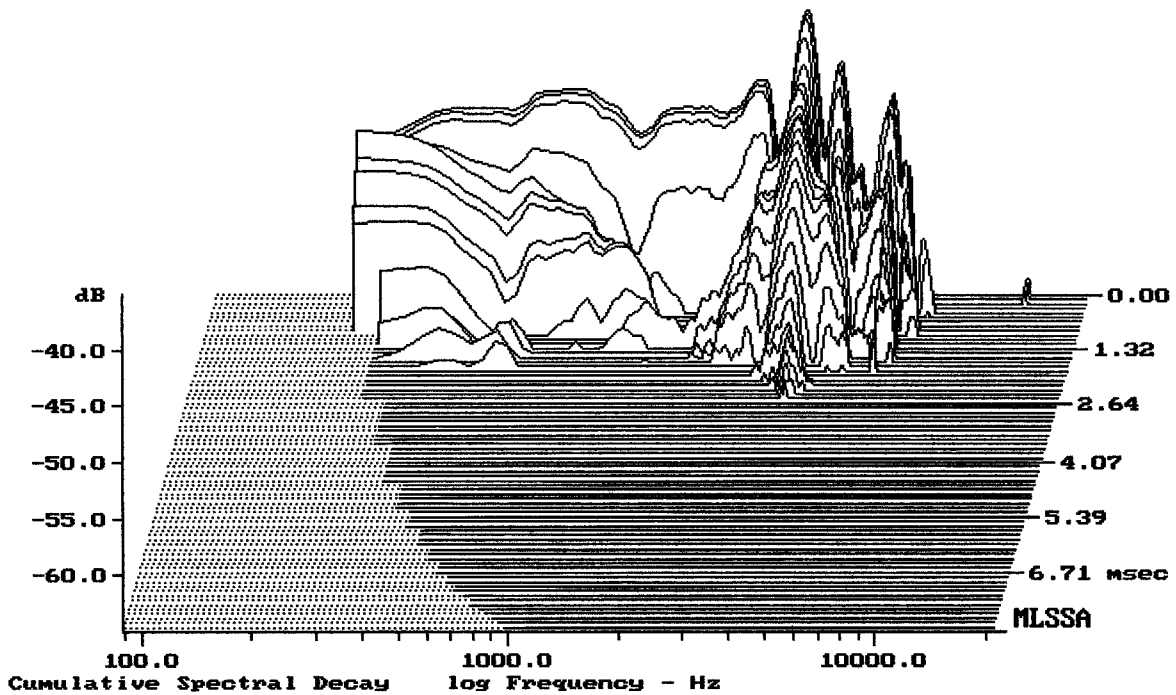

-63.42 dB, 3729 Hz (84), 2.530 msec (24)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.29	Ohms
2	Fs	92.43	Hz
3	Re	2.88	Ohms[dc]
4	Res	46.20	Ohms
5	Qms	5.41	
6	Qes	0.34	
7	Qts	0.32	
8	L1	0.29	mH
9	L2	0.52	mH
10	R2	2.29	Ohms
11	RMSE-load	0.40	Ohms
12	Vas(Sd)	10.58	liters
13	Mms	20.28	grams
14	Cms	146	μ M/Newton
15	B1	10.03	Tesla-M
16	SPLref(Sd)	95.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 226.98 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -41.5% (-20% to -50% is recommended).

8" RCF NEO FROM TT08-A

MLSSA: Parameters

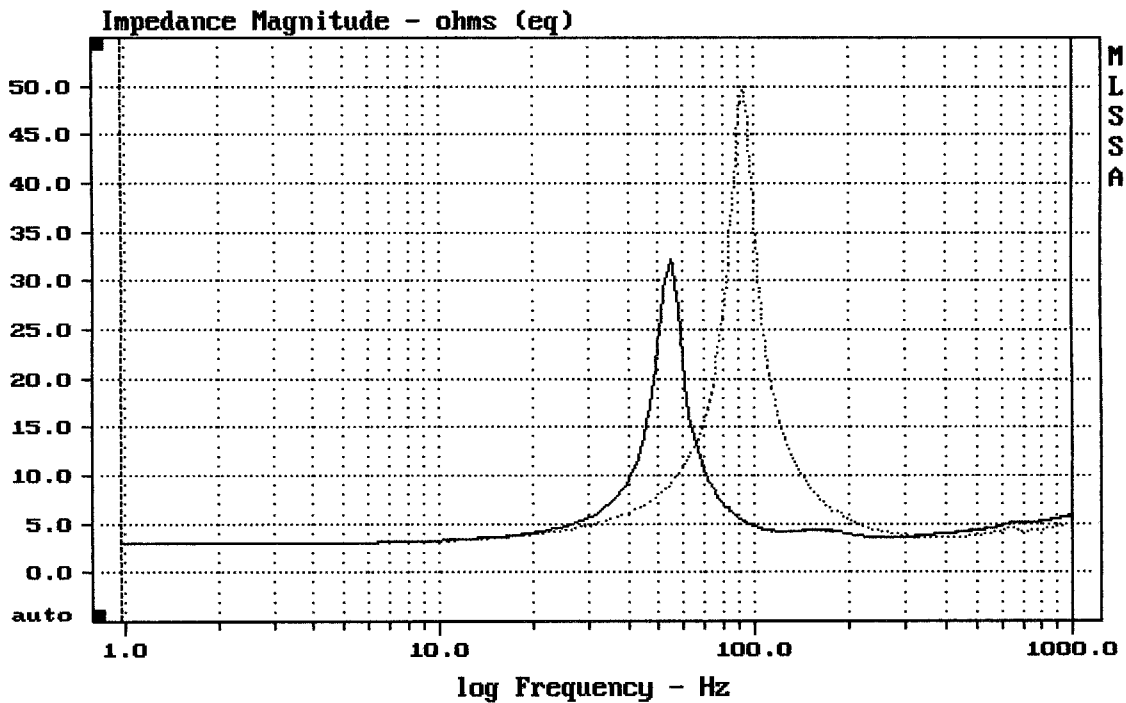

mean: 6.011, rms: 8.691, std: 6.277, max: 49.91, min: 2.945

MLSSA: Frequency Domain