


Level (78:18011 Hz) = 92.88 dB SPL/watt (8 ohms, @1.50 meters)


RCF TT08

MLSSA: Frequency Domain

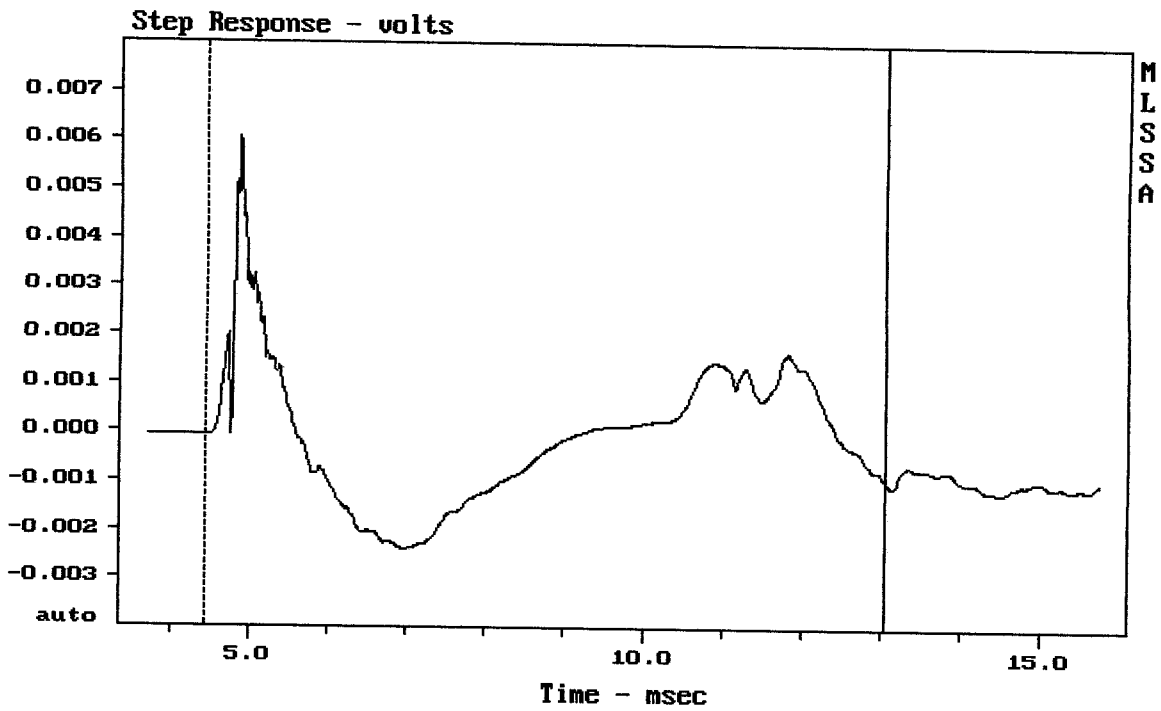


mean: -8.361e-005, rms: 0.00141, std: 0.001407, max: 0.006044, min: -0.002409

RCF TT08

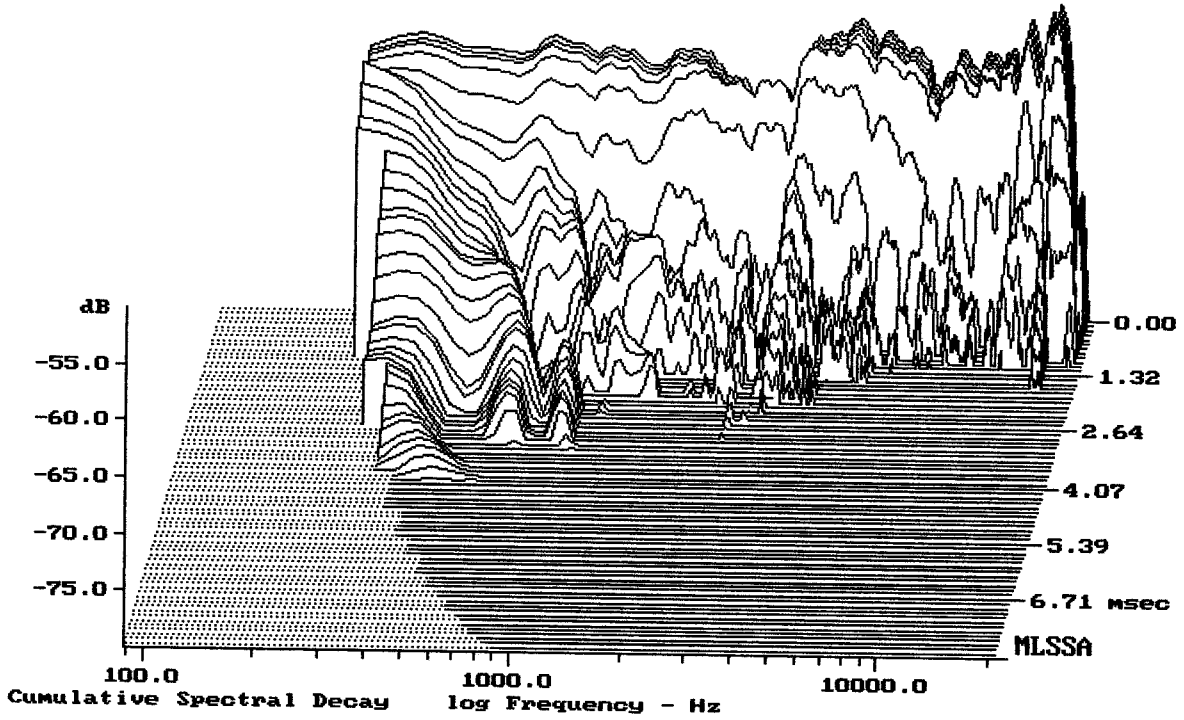


-79.07 dB, 3107 Hz (70), 2.200 msec (21)

DTTO

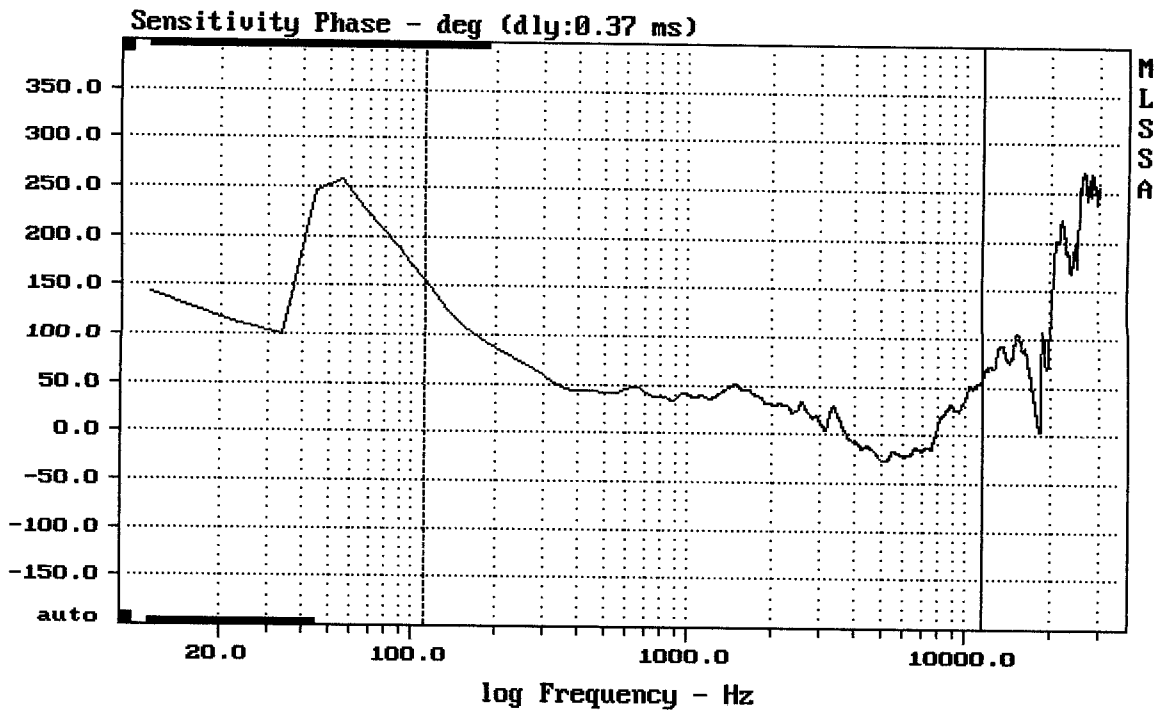


mean: 16.43, rms: 32.48, std: 28.02, max: 156.2, min: -27.53

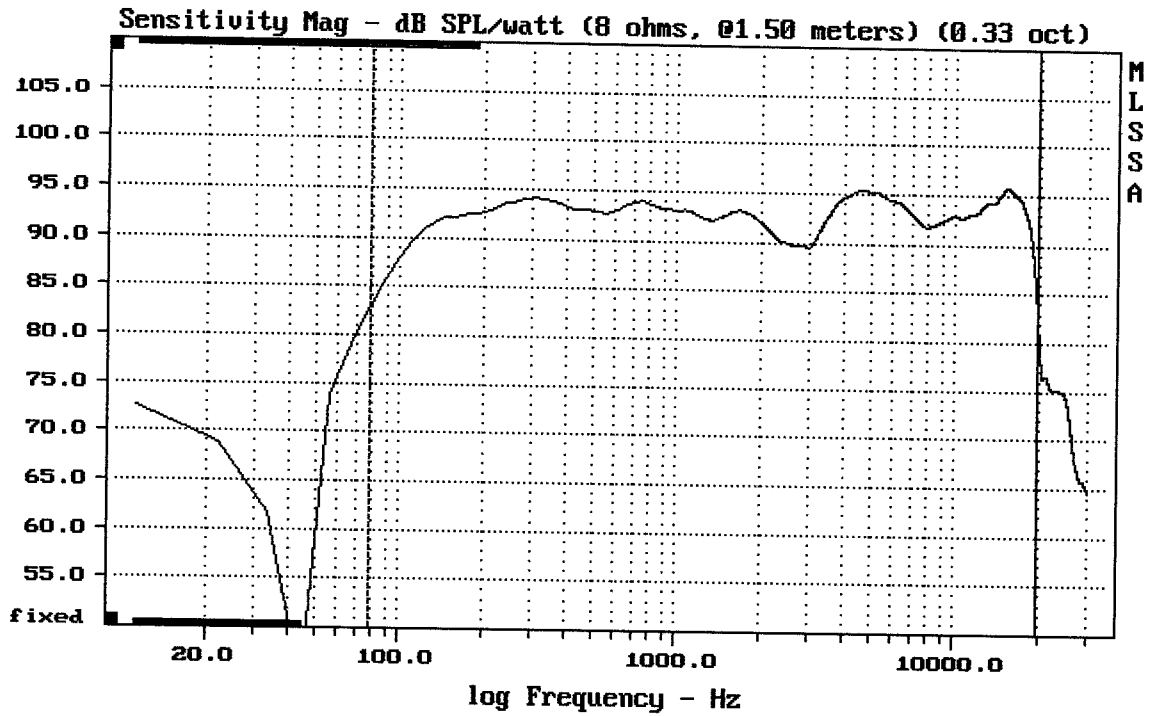

Level (78:19709 Hz) = 92.85 dB SPL/watt (8 ohms, @1.50 meters) (0.33 oct)


RCF TT08

MLSSA: Frequency Domain

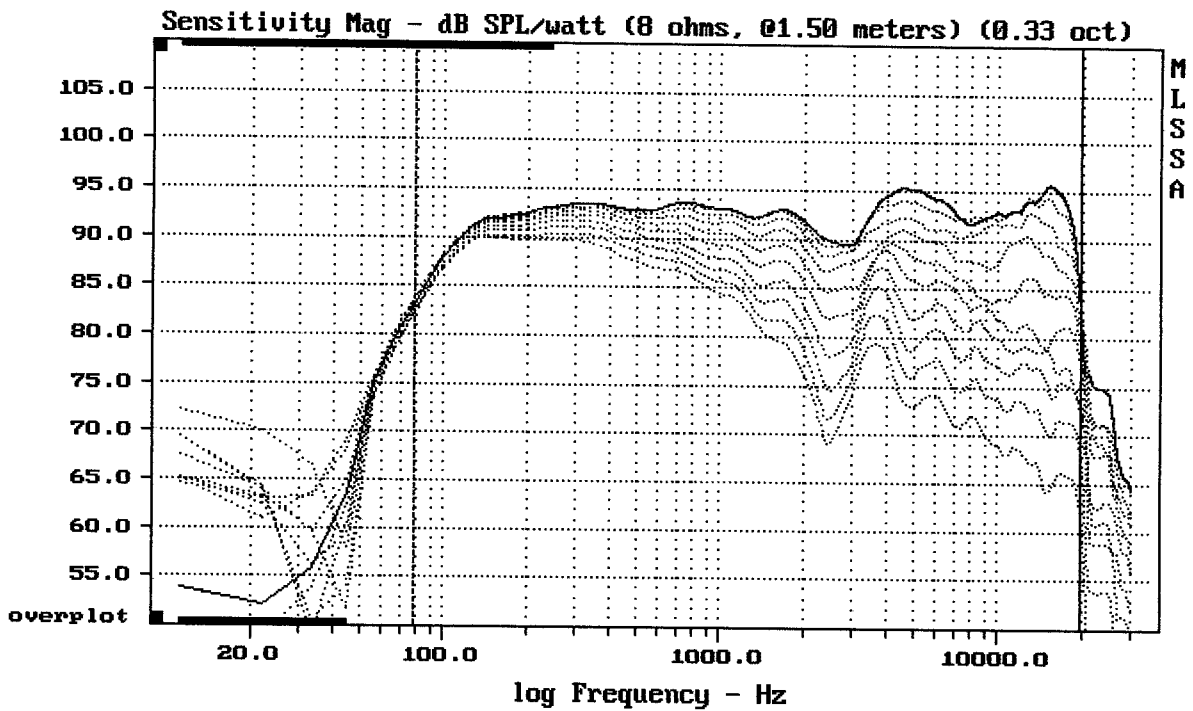

Overlay Compare: dev= +21/-9.2, std= 6.2, avg= -22


RCF TT08

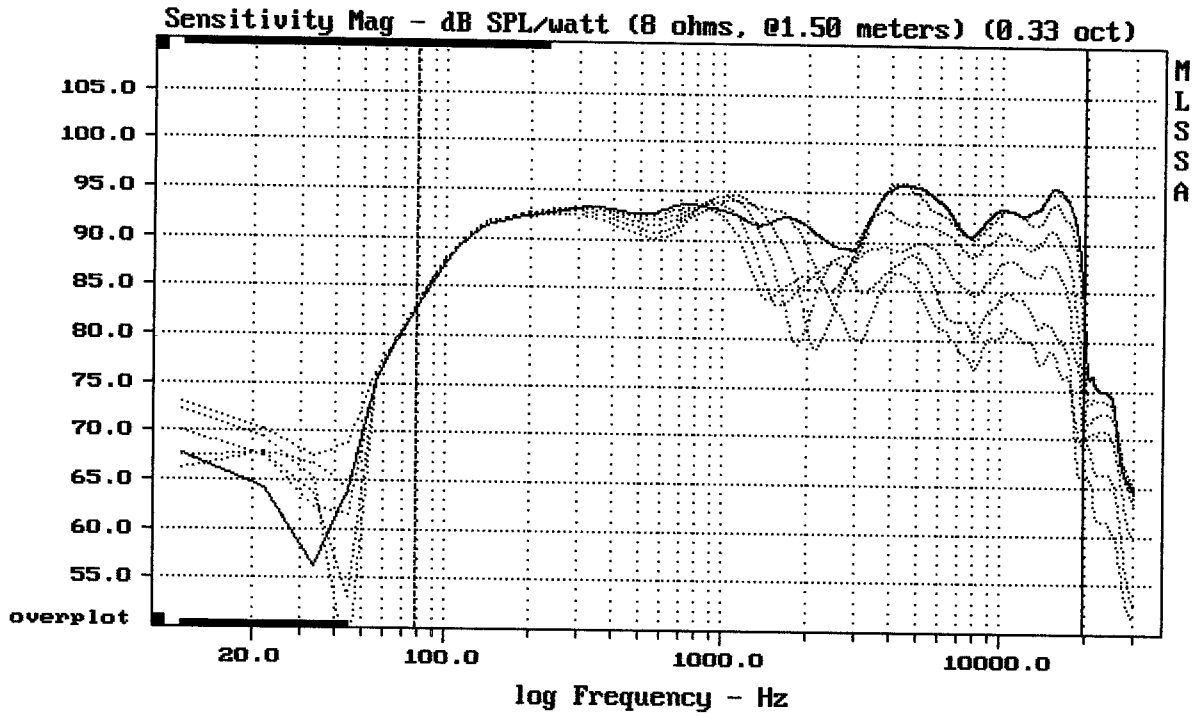

Overlay Compare: dev= +13/-10, std= 4.9, avg= -13


RCF TT08

MLSSA: Frequency Domain

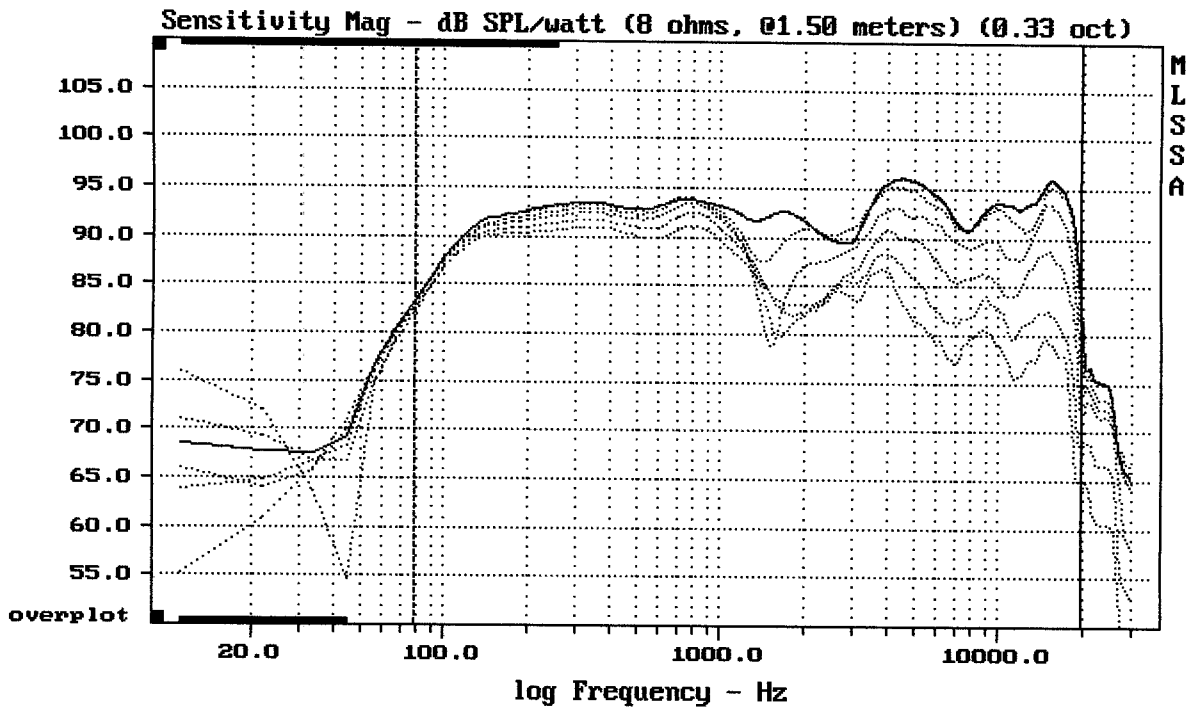

Overlay Compare: dev= +13/-11, std= 5, avg= -14


RCF TT08

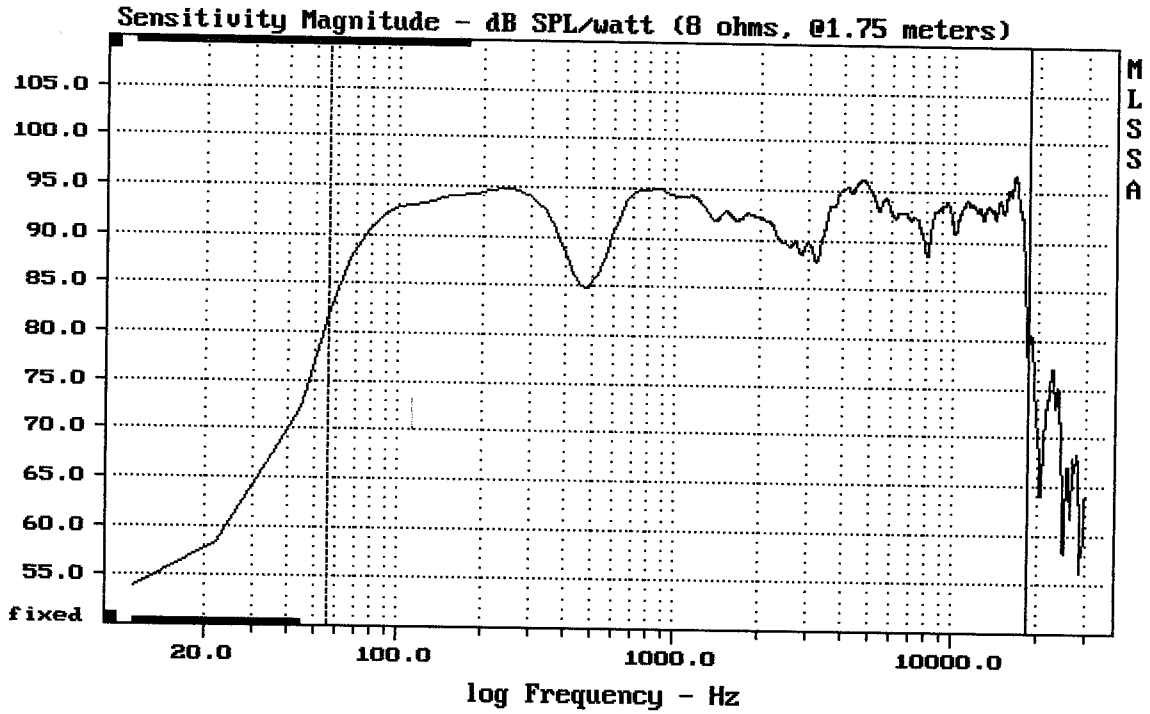

Level (55:18499 Hz) = 92.79 dB SPL/watt (8 ohms, @1.75 meters)


RCF TT08 STAGE MONITOR

MLSSA: Frequency Domain

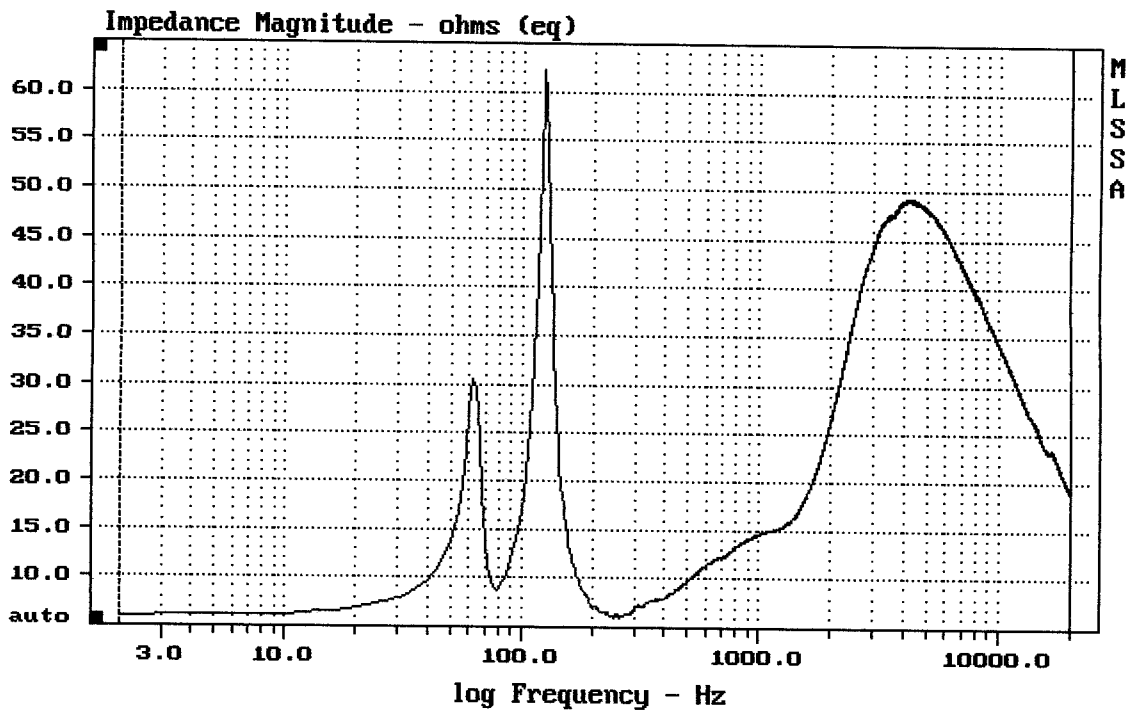

mean: 31.21, rms: 33.01, std: 10.74, max: 62.19, min: 6.021


RCF TT08 STAGE MONITOR

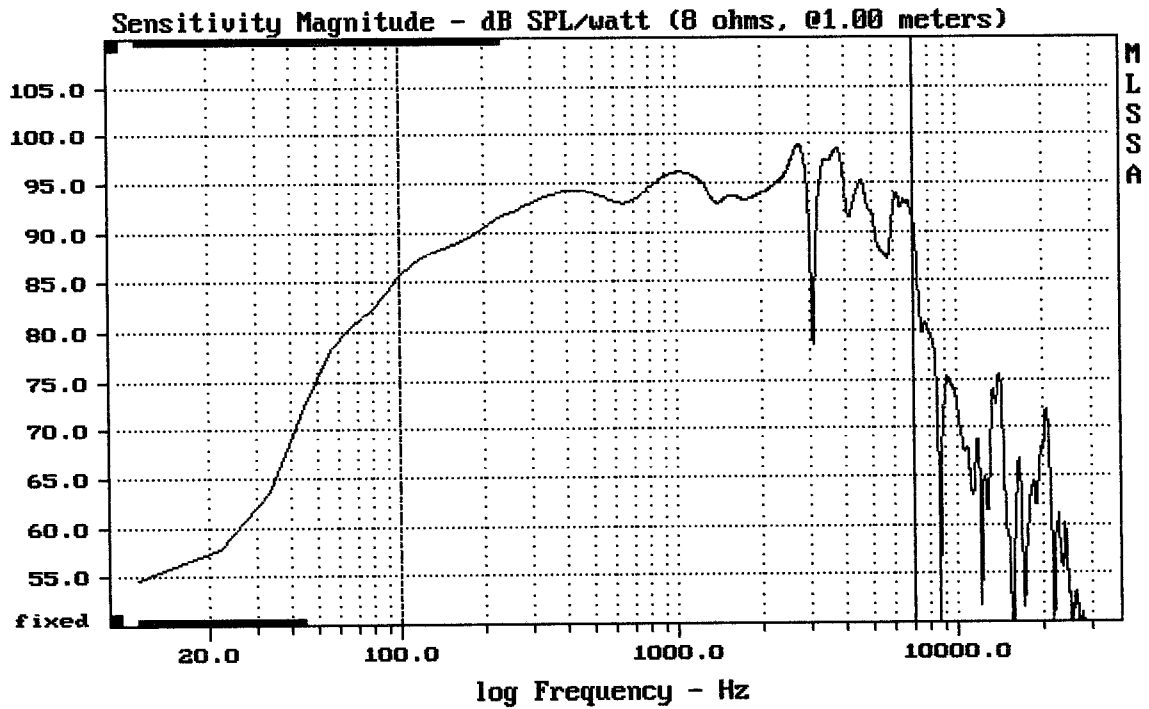

Level (100:7002 Hz) = 93.65 dB SPL/watt (8 ohms, @1.00 meters)

8" FROM RCF TT08

MLSSA: Frequency Domain

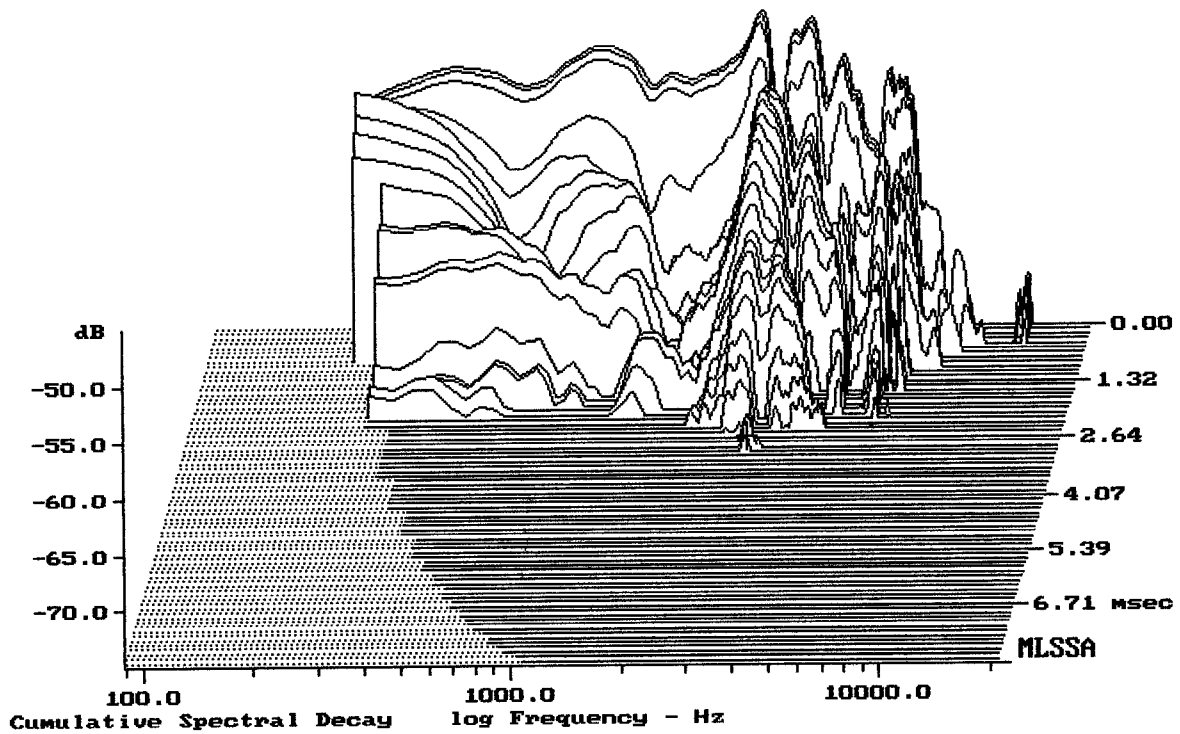

-73.63 dB, 3018 Hz (68), 2.970 msec (28)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	112.09	Hz
3	Re	5.50	Ohms[dc]
4	Res	89.20	Ohms
5	Qms	8.20	
6	Qes	0.51	
7	Qts	0.48	
8	L1	0.54	mH
9	L2	0.90	mH
10	R2	4.08	Ohms
11	RMSE-load	1.39	Ohms
12	Vas(Sd)	6.67	liters
13	Mms	18.71	grams
14	Cms	108	$\mu\text{M}/\text{Newton}$
15	B1	11.97	Tesla-M
16	SPLref(Sd)	94.5	dB[Re]
17	Rub-index	0.41	

Method: Mass-loaded (40.00 grams)

Area (Sd): 210.00 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -43.1% (-20% to -50% is recommended).

8" RCF NEO FROM TT08

MLSSA: Parameters

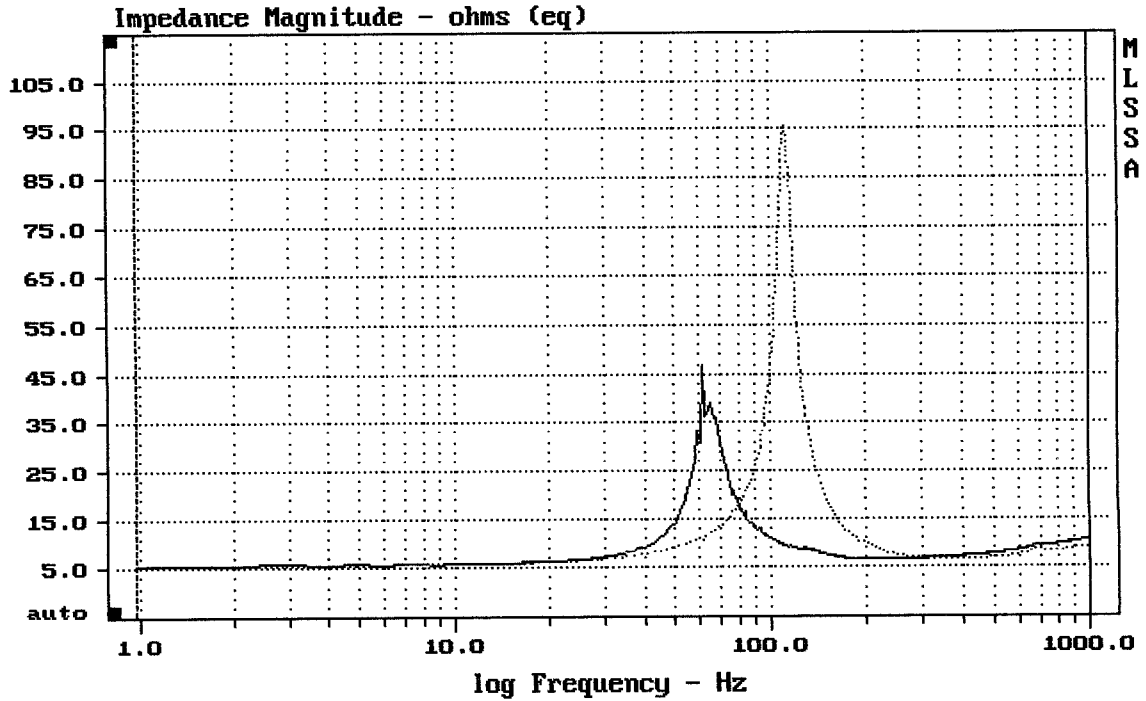

mean: 10.65, rms: 15.34, std: 11.03, max: 95.42, min: 5.567

MLSSA: Frequency Domain