

Line	Parameter	Value	Units
1	RMSE-free	0.52	Ohms
2	Fs	22.22	Hz
3	Re	5.46	Ohms[dc]
4	Res	28.78	Ohms
5	Qms	1.98	
6	Qes	0.38	
7	Qts	0.32	
8	L1	0.99	mH
9	L2	1.44	mH
10	R2	6.07	Ohms
11	RMSE-load	0.44	Ohms
12	Vas(Sd)	757.33	liters
13	Mms	122.40	grams
14	Cms	419	$\mu\text{M}/\text{Newton}$
15	B1	15.76	Tesla-M
16	SPLref(Sd)	95.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.19 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.3% (-20% to -50% is recommended).

GAUSS 4883B S/N0787037 ORIG.

MLSSA: Parameters

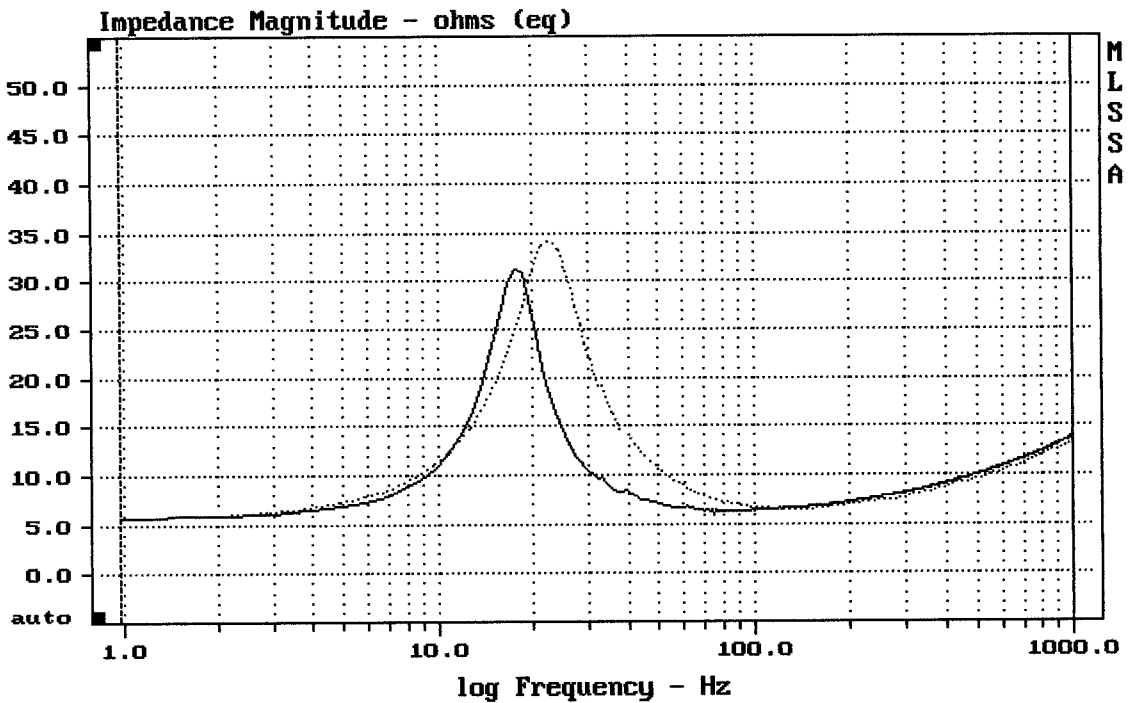

mean: 10.2, rms: 10.7, std: 3.237, max: 34.07, min: 5.738

MLSSA: Frequency Domain