

MLSSA SPO 4.0D #9609

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	1.07	Ohms
2	Fs	42.42	Hz
3	Re	5.27	Ohms [dc]
4	Res	51.19	Ohms
5	Qms	4.14	
6	Qes	0.43	
7	Qts	0.39	
8	L1	1.96	mH
9	L2	3.79	mH
10	R2	12.11	Ohms
11	RMSE-load	1.32	Ohms
12	Vas (Sd)	137.47	liters
13	Mms	185.01	grams
14	Cms	76	μ M/Newton
15	Bl	24.68	Tesla-M
16	SPLref (Sd)	95.7	dB [Re]
17	Rub-index	0.00	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.7% (-20% to -50% is recommended).

OLT R4504

MLSSA: Parameters

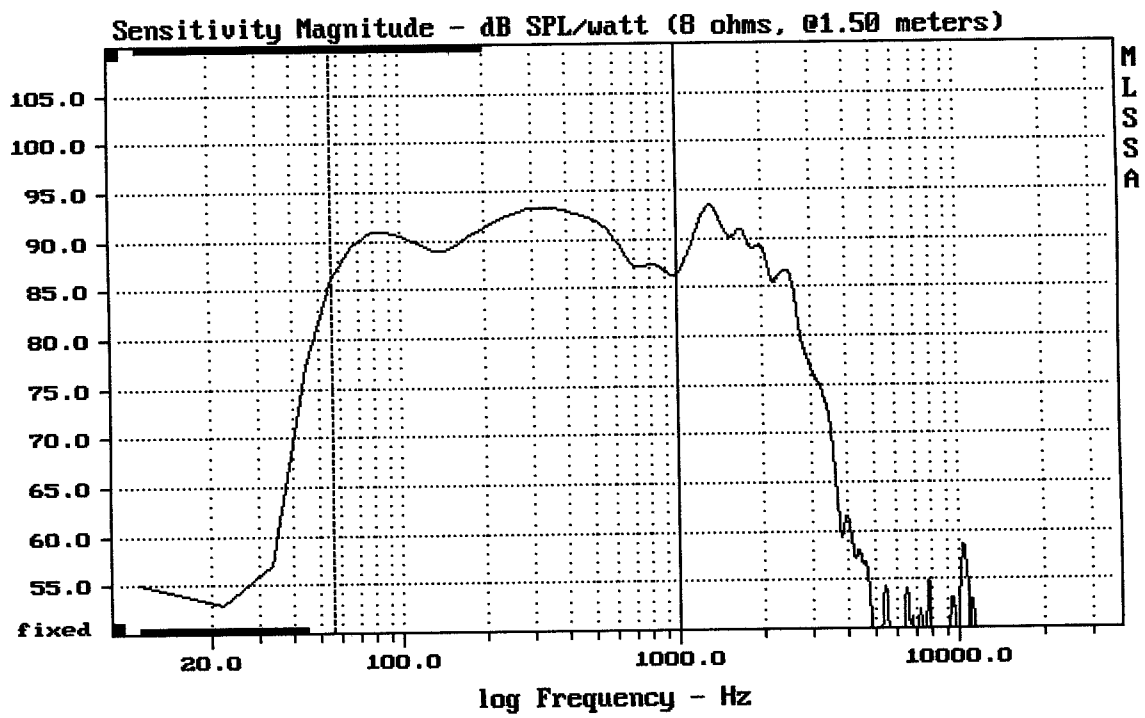

Level (55.999 Hz) = 90.73 dB SPL/watt (8 ohms, @1.50 meters)

UOLT R4504