



Level (100:3107 Hz) = 96.89 dB SPL/watt (8 ohms, @1.50 meters)

FANE COL18XS

MLSSA: Frequency Domain

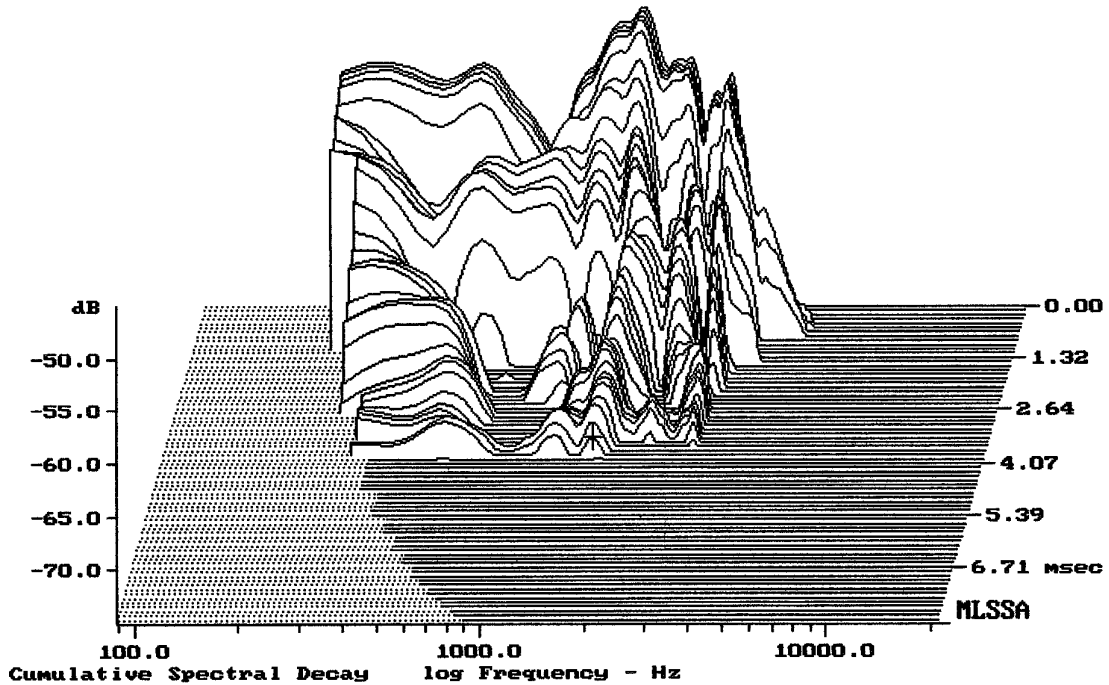

-73.29 dB, 1554 Hz (35), 3.850 msec (36)

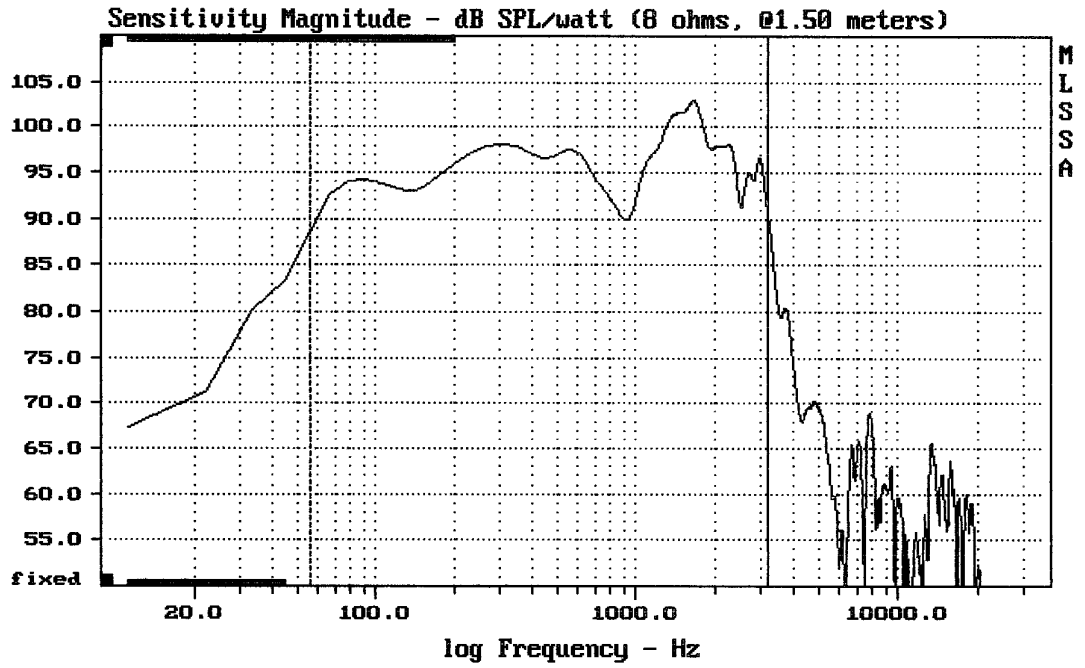



---

Level (55:3207 Hz) = 96.58 dB SPL/watt (8 ohms, @1.50 meters)

---

FANE COL18XS

MLSSA: Frequency Domain

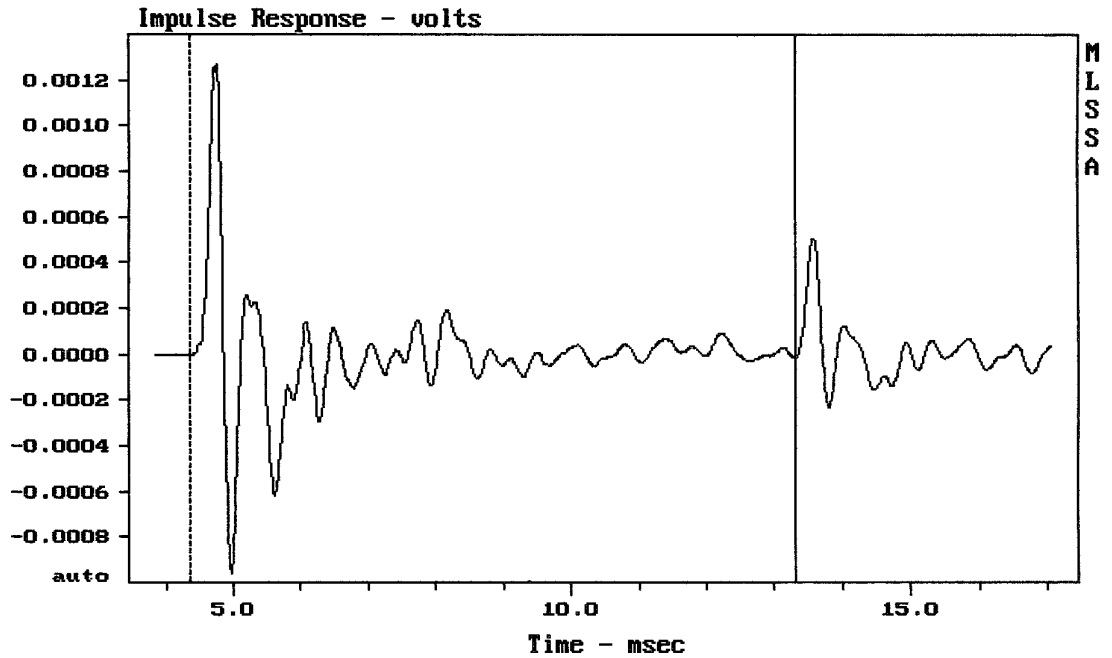


---

mean: -2.372e-006, rms: 0.0002213, std: 0.0002213, max: 0.001267, min: -0.0009

---

FANE COL18XS

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon  
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.23	Ohms
2	Fs	38.30	Hz
3	Re	5.28	Ohms[dc]
4	Res	123.87	Ohms
5	Qms	11.69	
6	Qes	0.50	
7	Qts	0.48	
8	L1	1.08	mH
9	L2	1.33	mH
10	R2	5.90	Ohms
11	RMSE-load	0.83	Ohms
12	Vas(Sd)	191.86	liters
13	Mms	189.83	grams
14	Cms	91	$\mu$ M/Newton
15	B1	22.00	Tesla-M
16	SPLref(Sd)	95.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1225.42 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.0% (-20% to -50% is recommended).

FANE COL18XS

MLSSA: Parameters

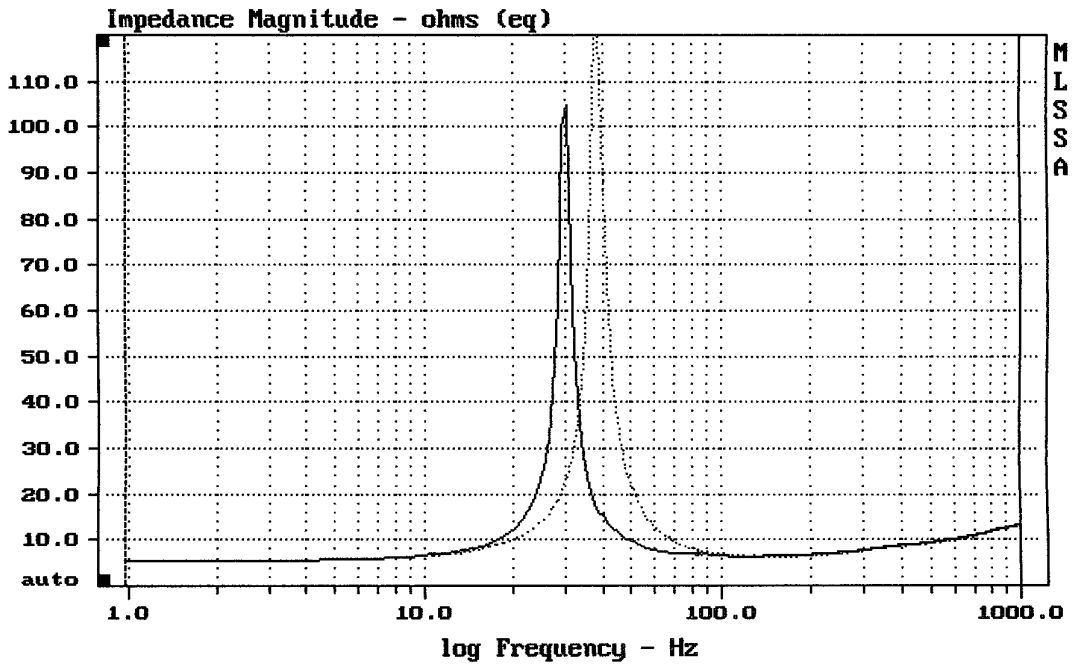

mean: 10.56, rms: 13.27, std: 8.026, max: 134.7, min: 5.322

MLSSA: Frequency Domain