


Level (55:2408 Hz) = 94.47 dB SPL/watt (8 ohms, @1.50 meters)

SOVEREIGN PRO 18-800P

MLSSA: Frequency Domain

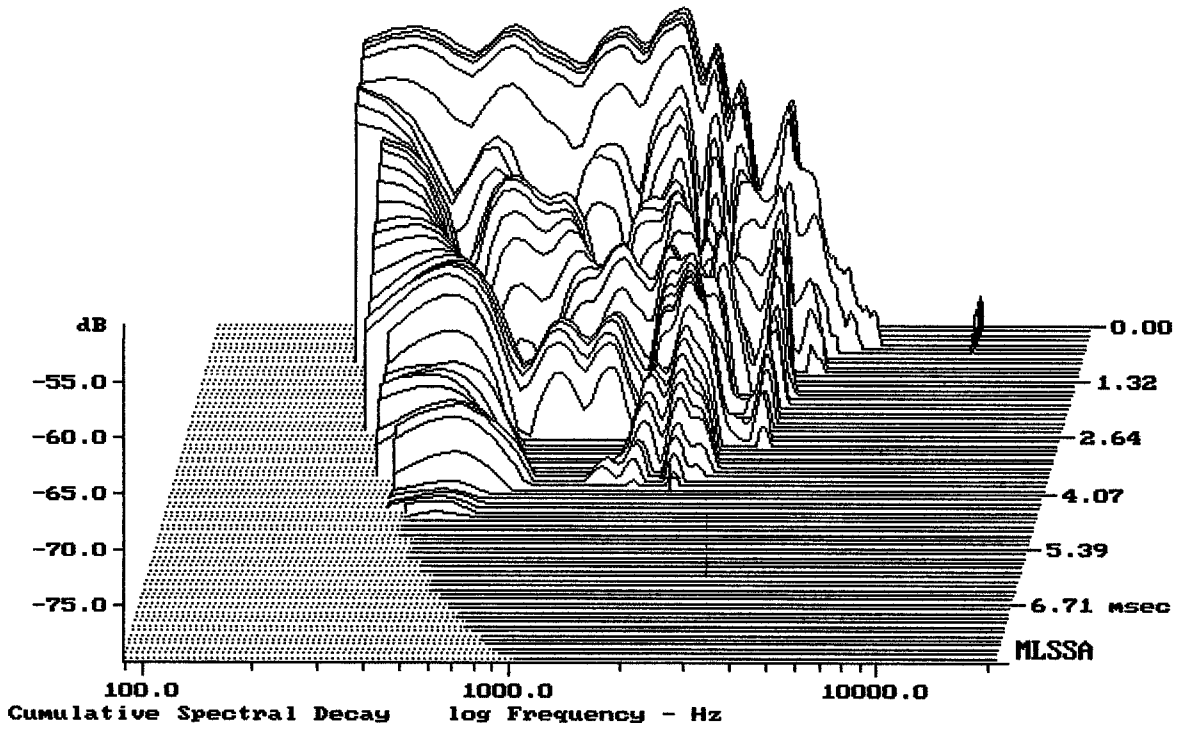

-79.22 dB, 1998 Hz (45), 3.850 msec (36)

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	1.22	Ohms
2	Fs	38.78	Hz
3	Re	6.70	Ohms[dc]
4	Res	134.38	Ohms
5	Qms	10.90	
6	Qes	0.54	
7	Qts	0.52	
8	L1	1.16	mH
9	L2	1.94	mH
10	R2	9.95	Ohms
11	RMSE-load	0.83	Ohms
12	Vas(Sd)	158.83	liters
13	Mms	191.53	grams
14	Cms	88	$\mu\text{M}/\text{Newton}$
15	B1	23.98	Tesla-M
16	SPLref(Sd)	94.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.7% (-20% to -50% is recommended).

SOVEREIGN PRO 18-800P

MLSSA: Parameters

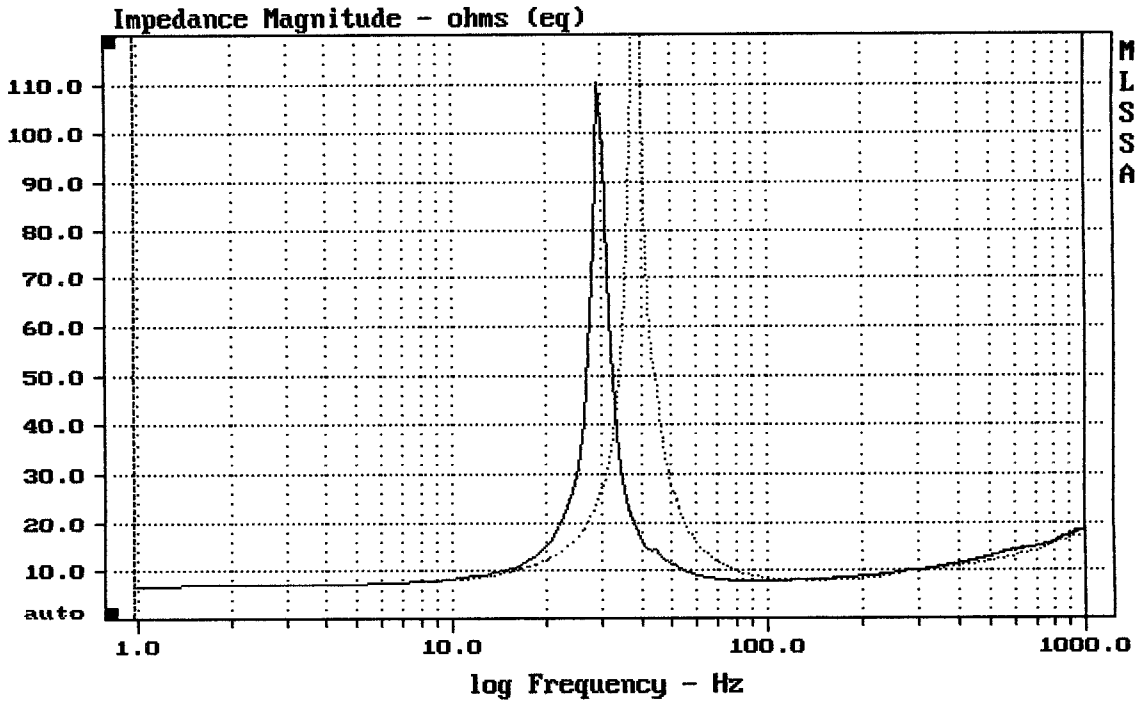

mean: 13.62, rms: 16.32, std: 8.996, max: 147.5, min: 6.736

MLSSA: Frequency Domain