


---

Overlay Compare: dev= +4.3/-6.6, std= 3.4, avg= -2

---

SUB 702-AS

MLSSA: Frequency Domain

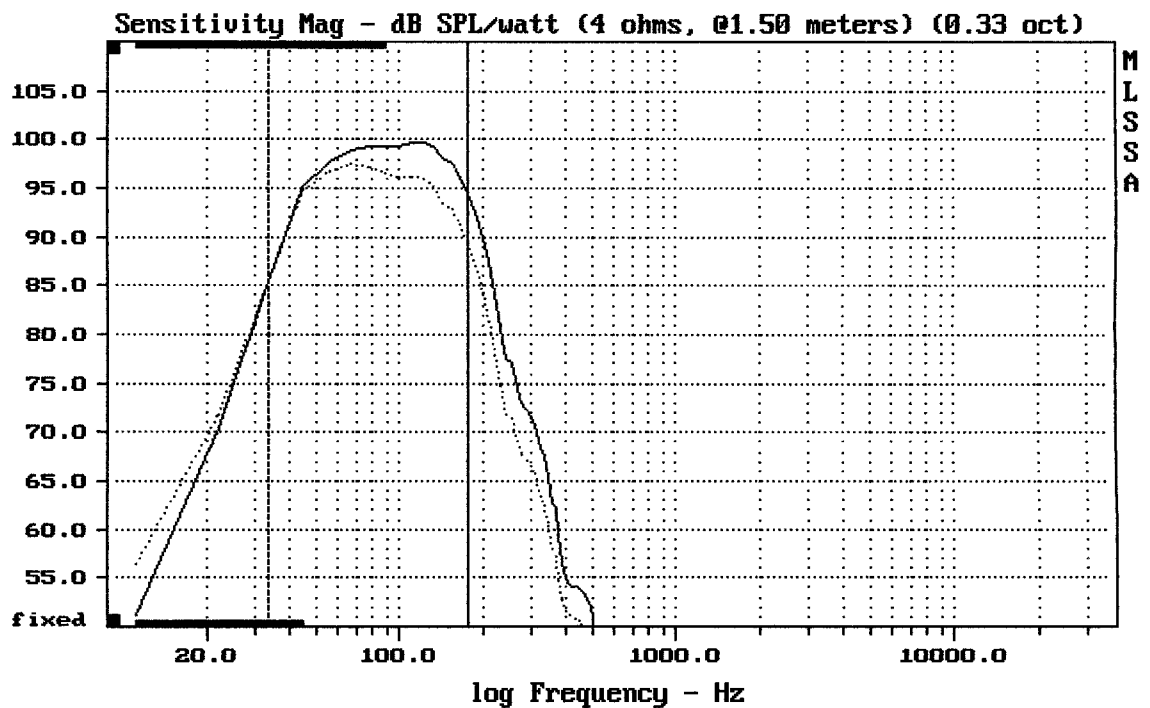


---

Overlay Compare: dev= +2.3/-3, std= 1.7, avg= 3

---

SUB 702-AS

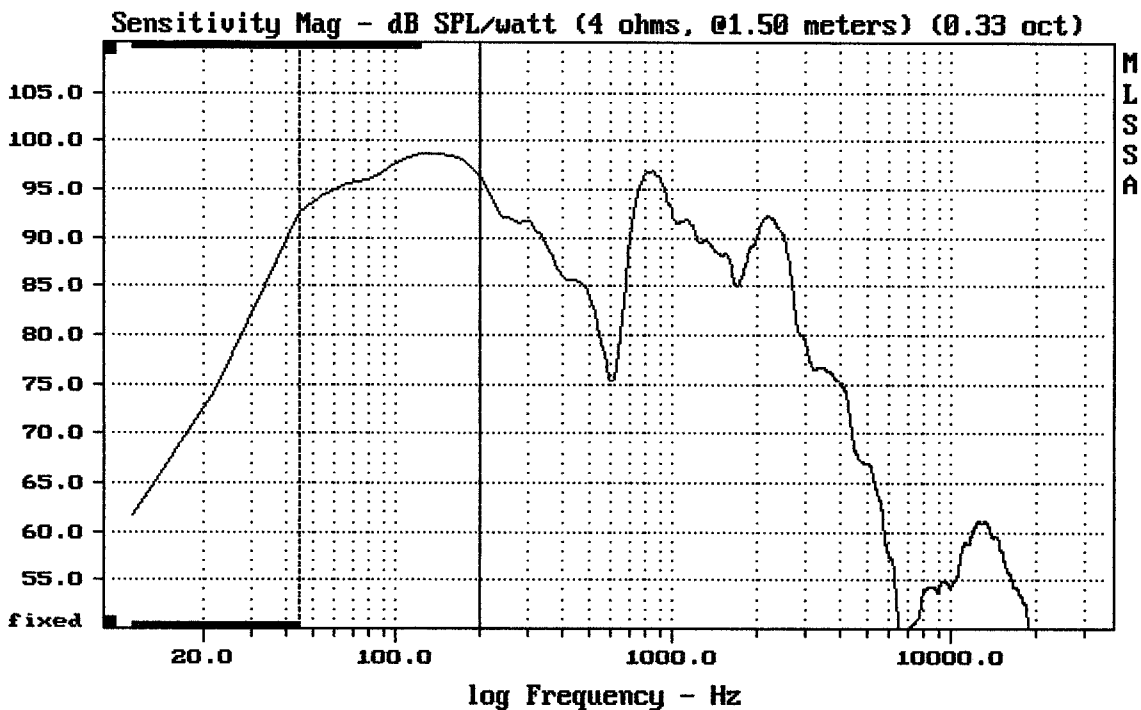


---

Level (44:200 Hz) = 96.74 dB SPL/watt (4 ohms, @1.50 meters) (0.33 oct)

---

RCF SUB 702-AS PASIV

MLSSA: Frequency Domain

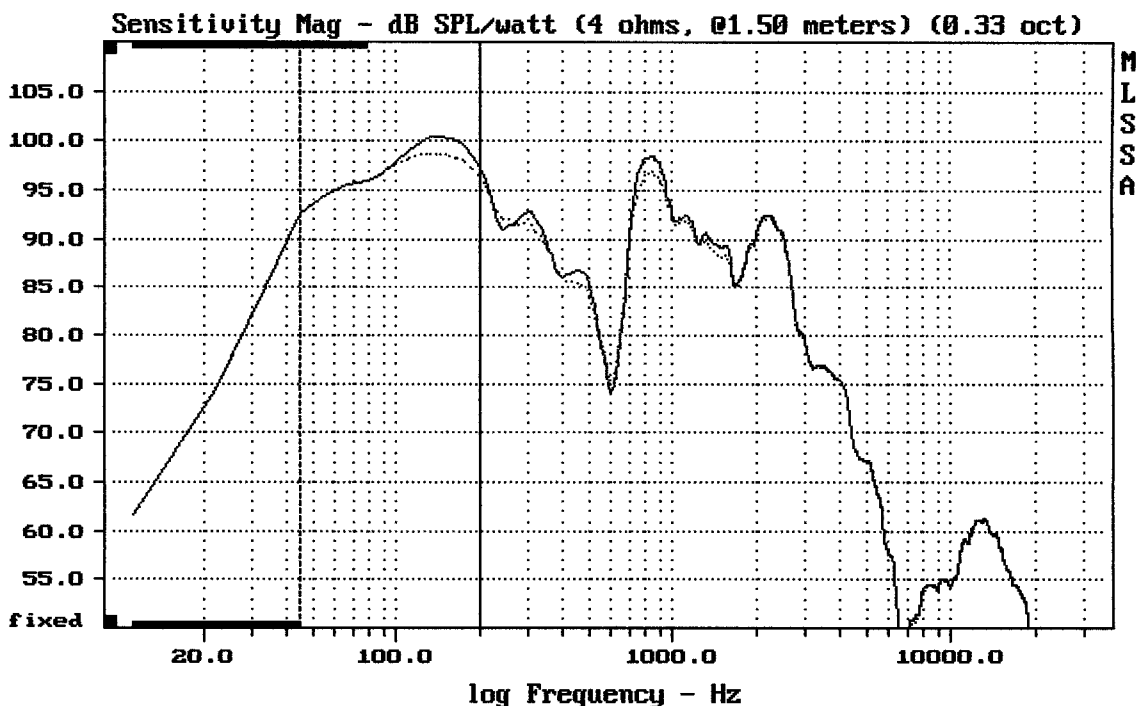


---

Overlay Compare: dev= +0.98/-0.88, std= 0.74, avg= 0.88

---

RCF SUB 702-AS PASIV

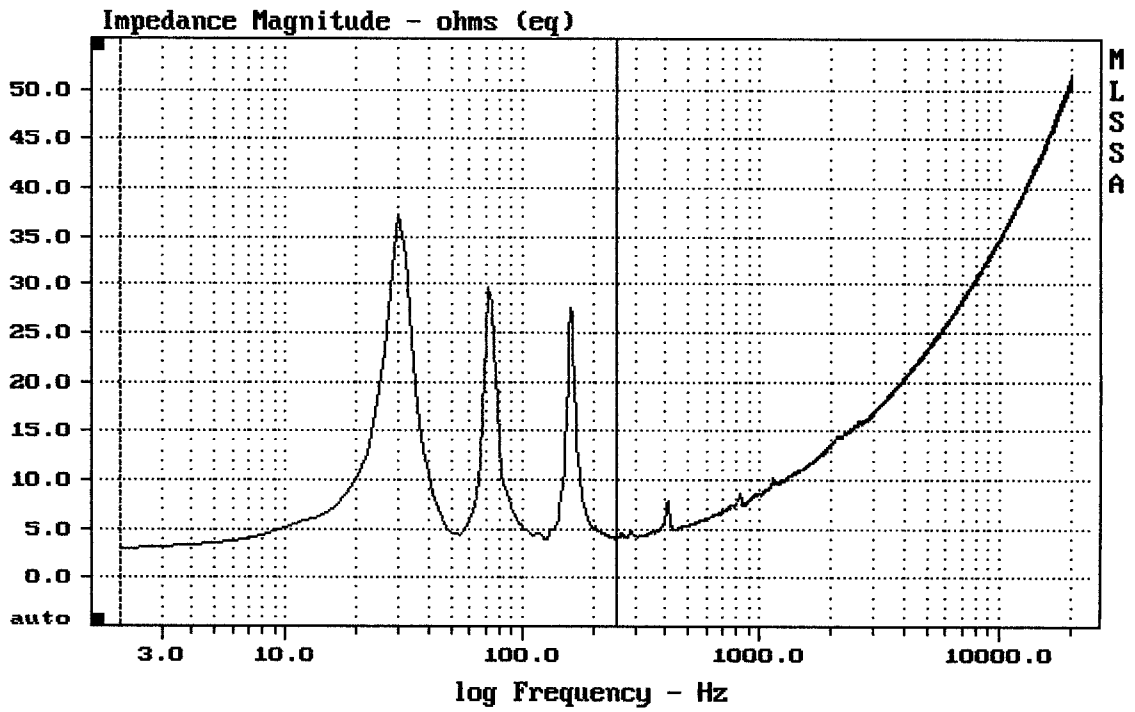


---

mean: 9.168, rms: 11.76, std: 7.362, max: 37.29, min: 2.997

---

SUB 702-AS

MLSSA: Frequency Domain

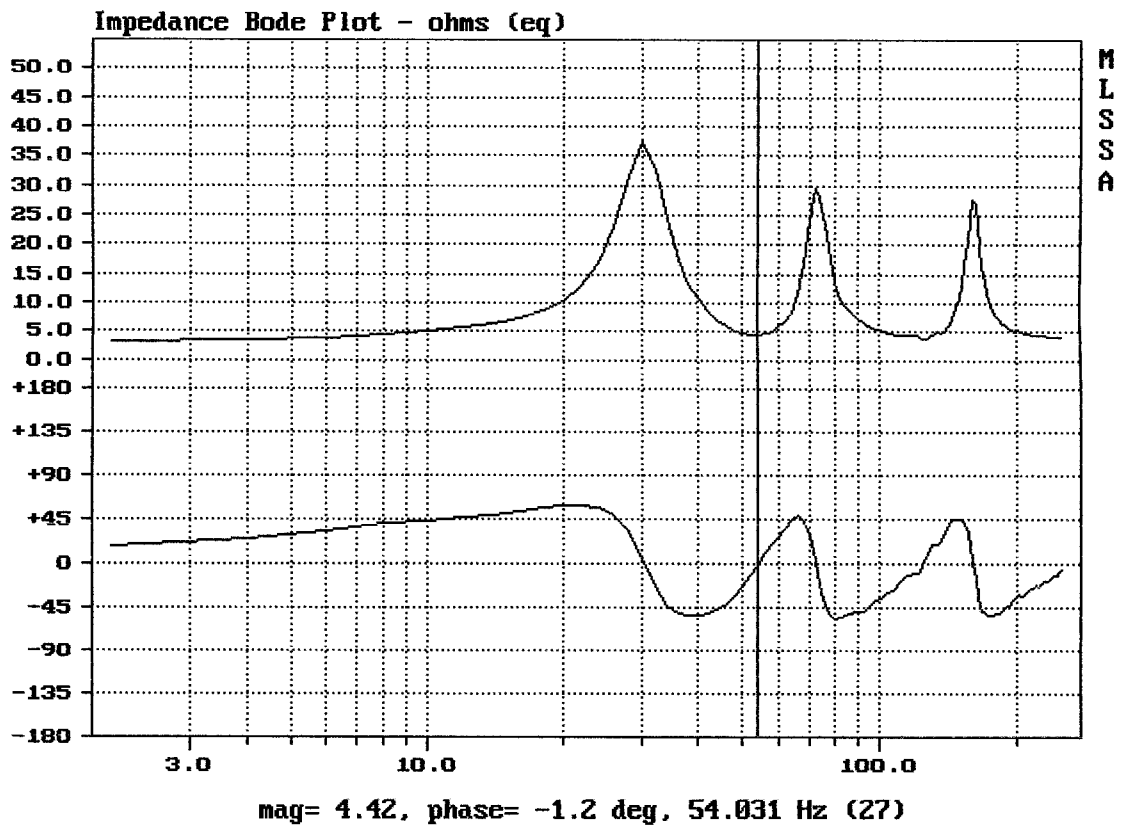

Line	Parameter	Value	Units
1	RMSE-free	0.40	Ohms
2	Fs	47.69	Hz
3	Re	2.79	Ohms[dc]
4	Res	62.23	Ohms
5	Qms	4.49	
6	Qes	0.20	
7	Qts	0.19	
8	L1	0.79	mH
9	L2	1.27	mH
10	R2	3.73	Ohms
11	RMSE-load	0.38	Ohms
12	Vas(Sd)	77.33	liters
13	Mms	57.01	grams
14	Cms	195	$\mu\text{M}/\text{Newton}$
15	B1	15.38	Tesla-M
16	SPLref(Sd)	98.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.09 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.1% (-20% to -50% is recommended).

12" FROM SUB 702

MLSSA: Parameters

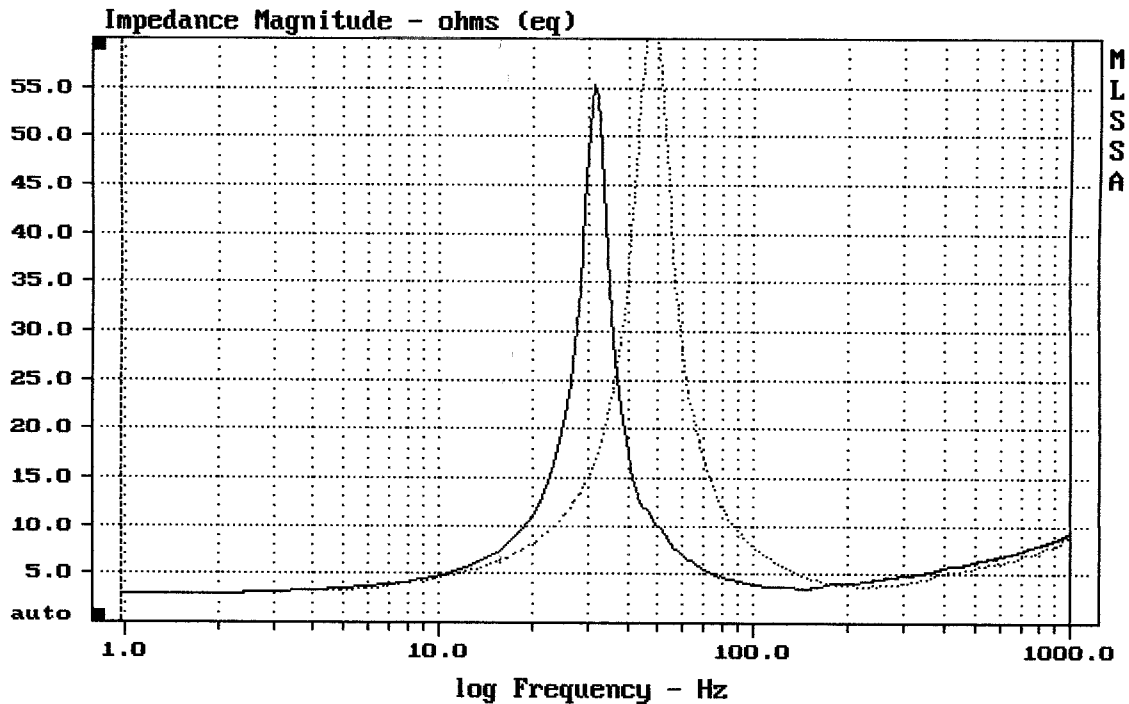

mean: 7.389, rms: 9.977, std: 6.704, max: 63.83, min: 2.895

MLSSA: Frequency Domain