


Overlay Compare: dev= +3.4/-5.1, std= 2.7, avg= -2.1


RCF SUB 705-AS PASIV

MLSSA: Frequency Domain

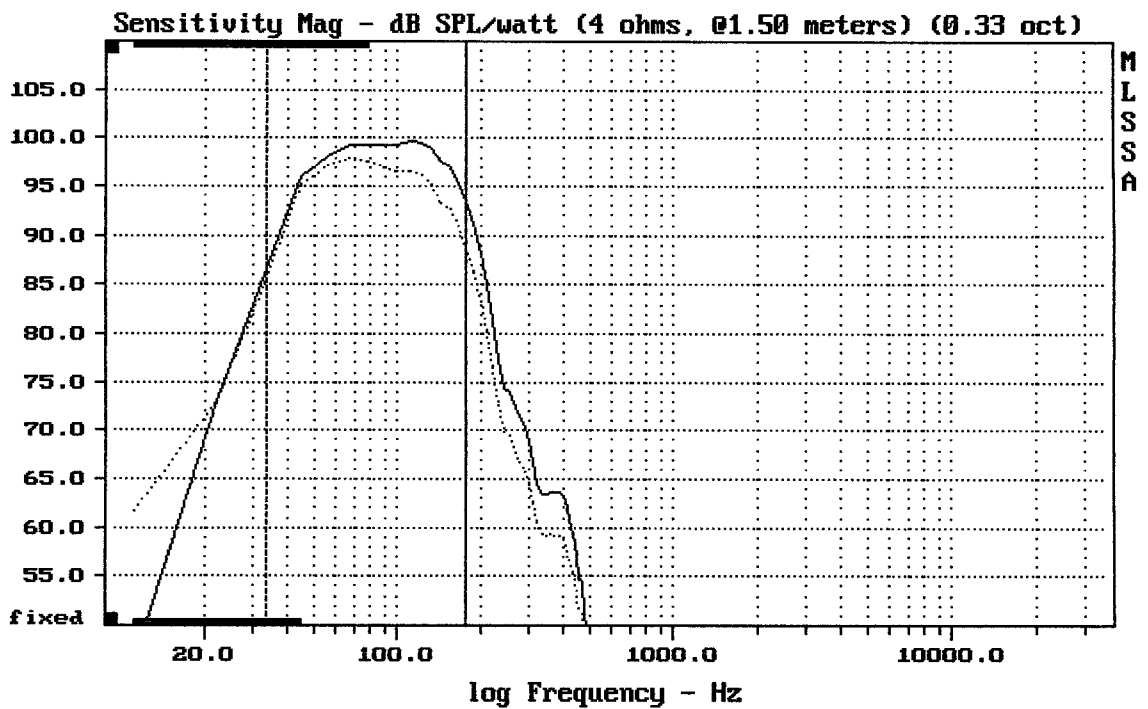

Overlay Compare: dev= +1.9/-2.1, std= 1.4, avg= 2.8

SUB 705-AS

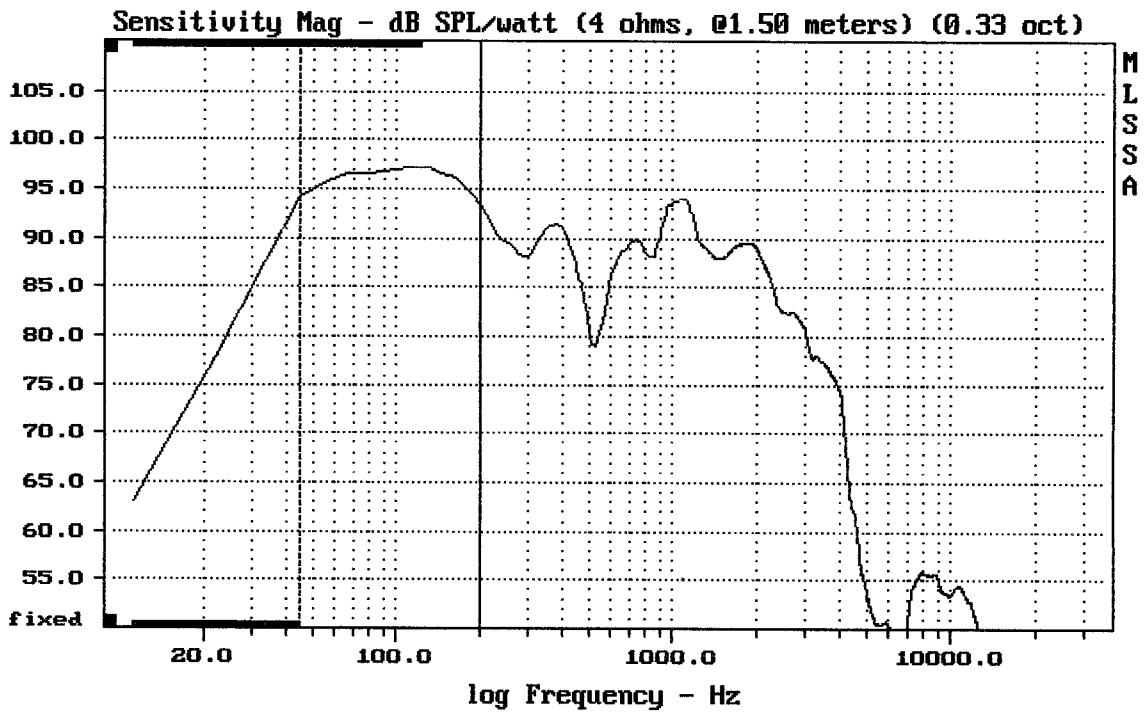



---

Level (44:200 Hz) = 96.10 dB SPL/watt (4 ohms, @1.50 meters) (0.33 oct)

---

RCF SUB 705-AS PASIV

MLSSA: Frequency Domain

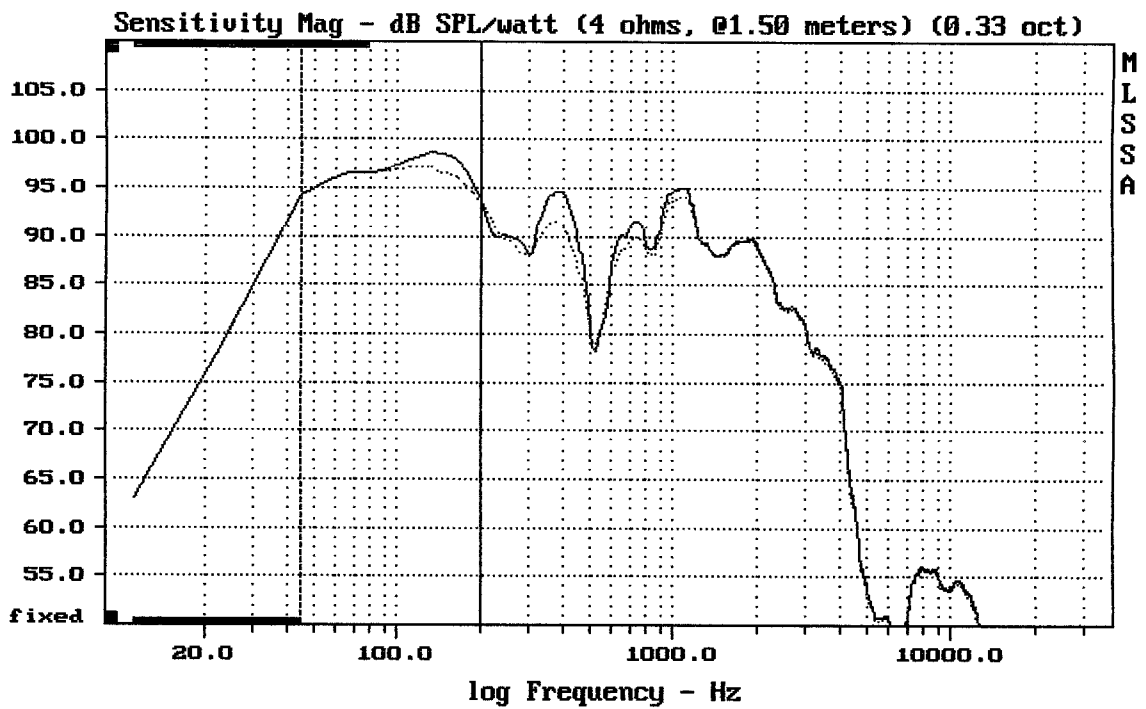



---

Overlay Compare: dev= +1.1/-0.79, std= 0.74, avg= 0.79

---

RCF SUB 705-AS PASIV

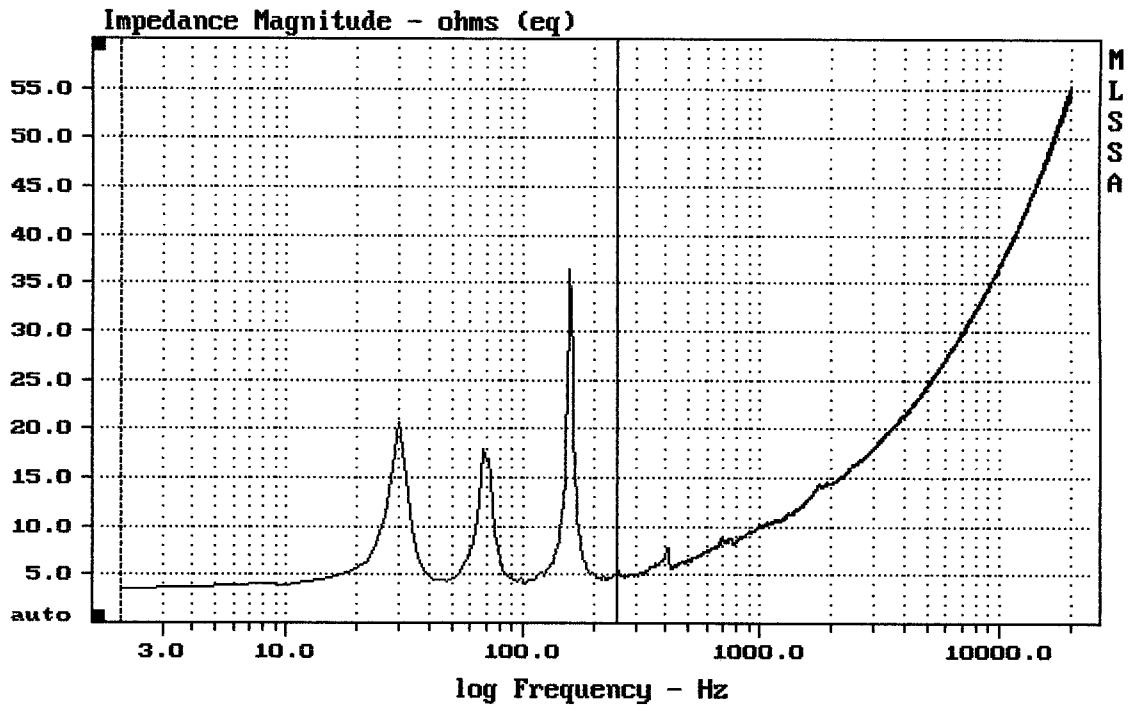

---

mean: 7.818, rms: 9.843, std: 5.981, max: 36.5, min: 3.591

---

SUB 705-AS

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.31	Ohms
2	Fs	60.95	Hz
3	Re	2.94	Ohms[dc]
4	Res	57.84	Ohms
5	Qms	8.57	
6	Qes	0.44	
7	Qts	0.41	
8	L1	0.71	mH
9	L2	1.45	mH
10	R2	5.02	Ohms
11	RMSE-load	0.51	Ohms
12	Vas(Sd)	67.24	liters
13	Mms	117.42	grams
14	Cms	58	$\mu\text{M}/\text{Newton}$
15	B1	17.42	Tesla-M
16	SPLref(Sd)	97.3	dB[Re]
17	Rub-index	0.08	

Method: Mass-loaded (80.00 grams)

Area (Sd): 907.92 sq cm


DCR mode: Measure (-0.09 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.1% (-20% to -50% is recommended).

15" FROM SUB 705

MLSSA: Parameters

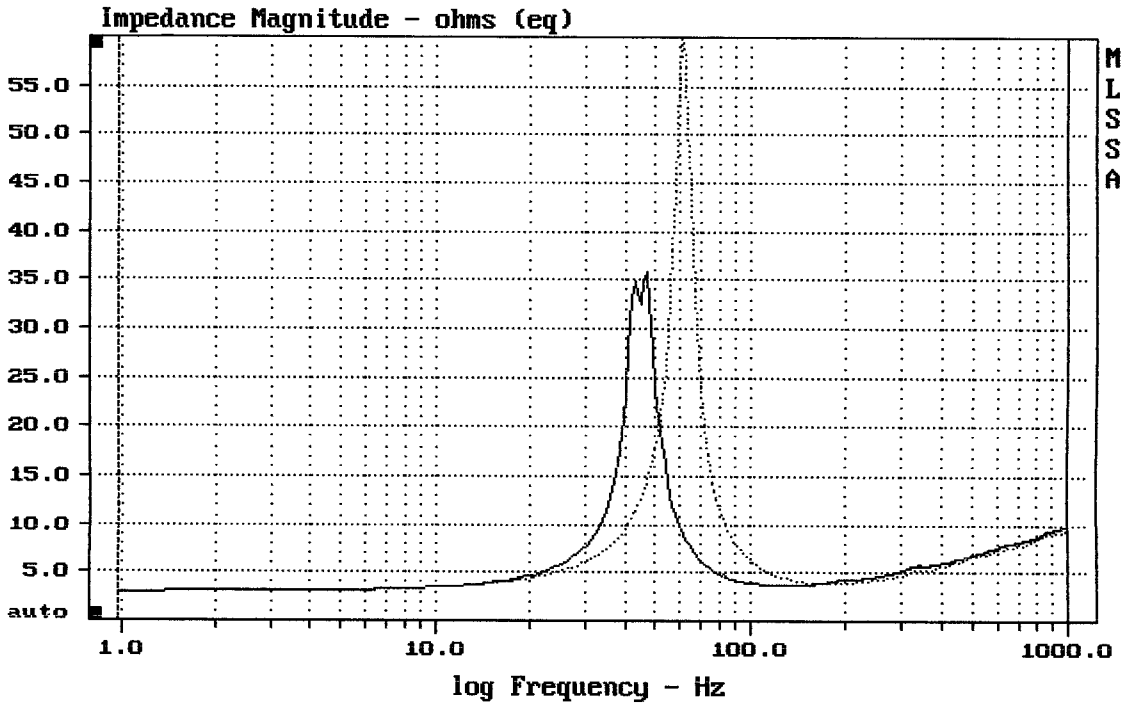

mean: 7.454, rms: 9.089, std: 5.201, max: 59.92, min: 3.017

MLSSA: Frequency Domain