



mean: 100.16, rms: 100.63, std: 2.53, max: 104.66, min: 90.44

ART410-A MK II

MLSSA: Frequency Domain

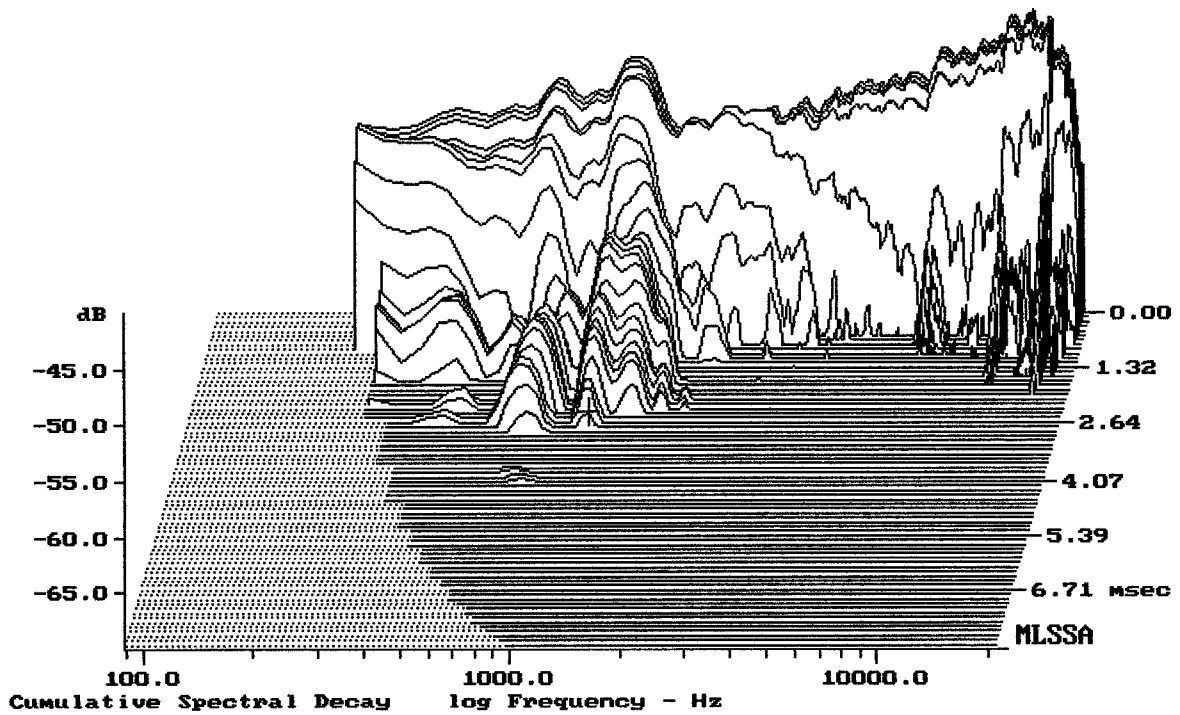


-68.63 dB, 1110 Hz (25), 2.750 msec (26)

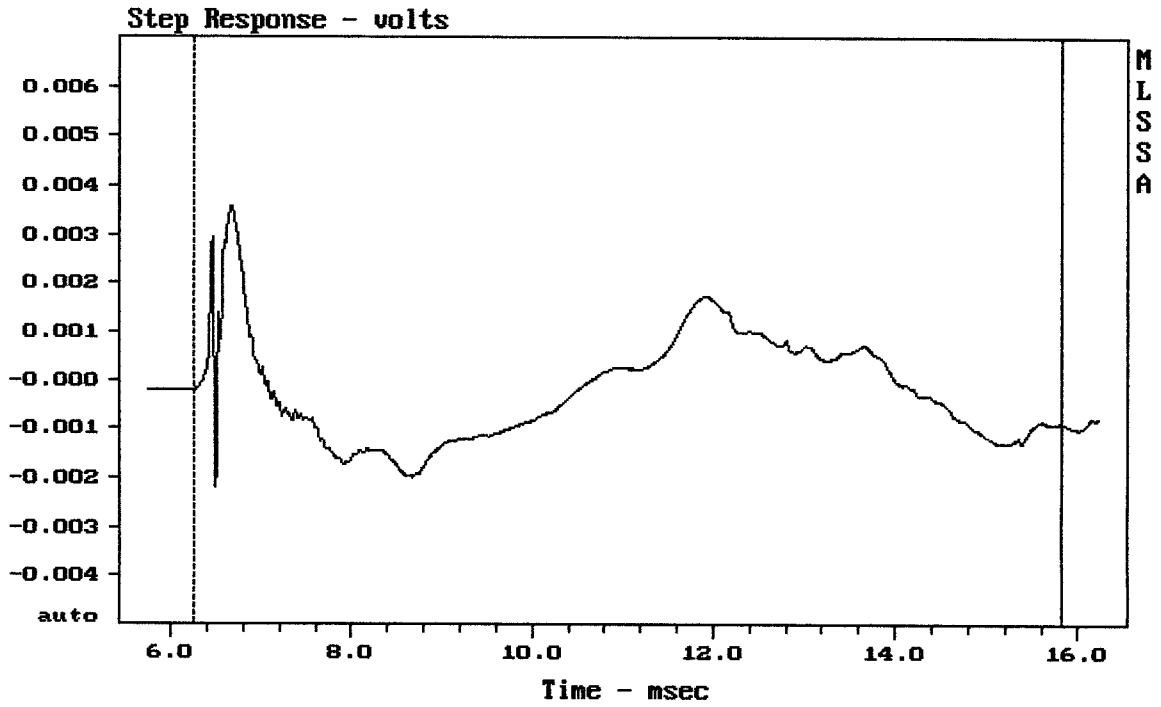

mean: -0.0002178, rms: 0.001113, std: 0.001092, max: 0.003572, min: -0.002181


ART410-A MK II

MLSSA: Time Domain

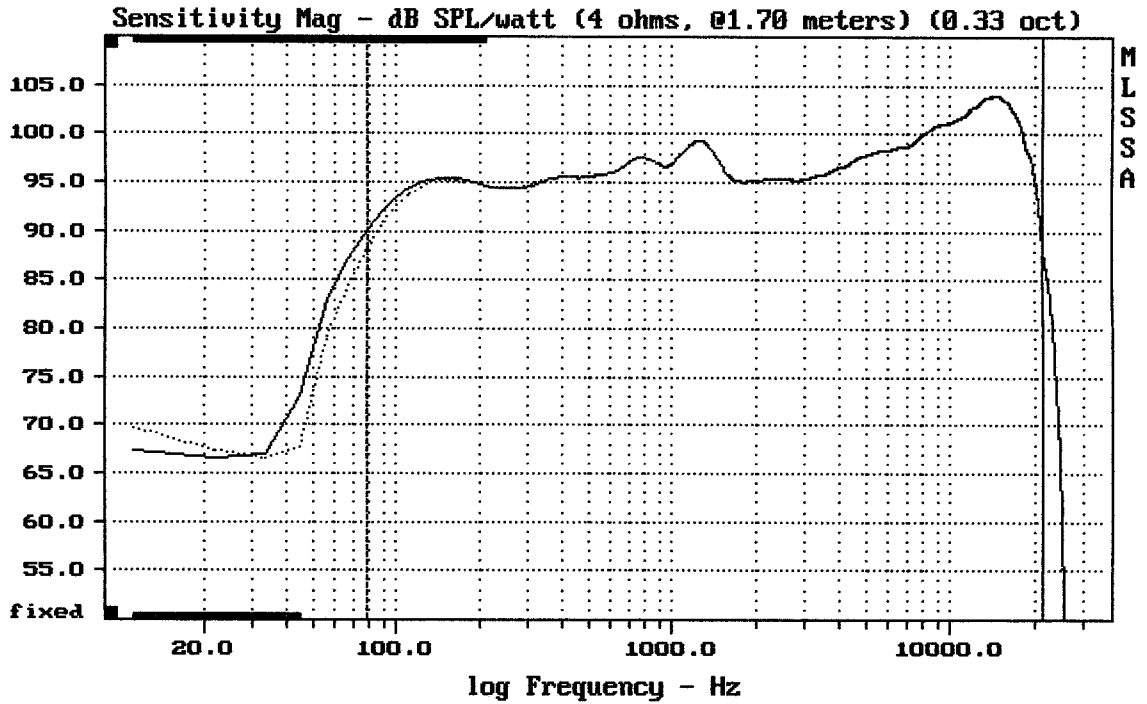

Overlay Compare: dev= +1.8/-0.13, std= 0.069, avg= 0.049

ART410-A MK II

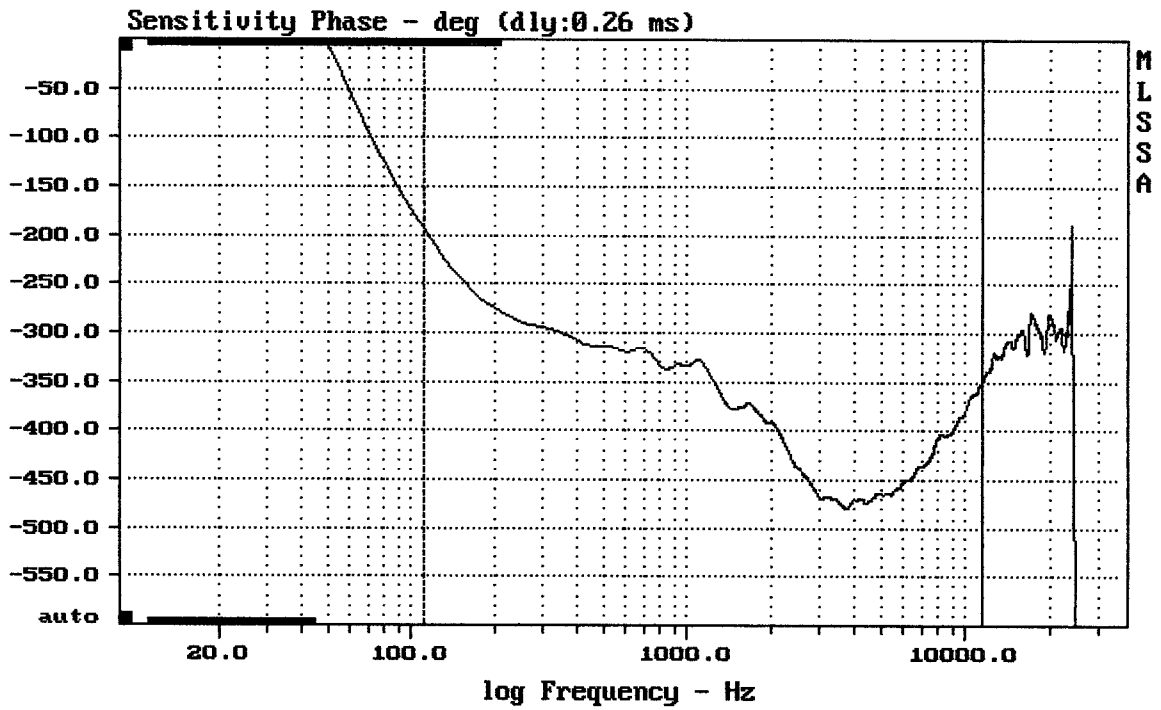


---

mean: -411.4, rms: 414.5, std: 50.17, max: -193.5, min: -479.2

---

ART410-A MK II

MLSSA: Frequency Domain

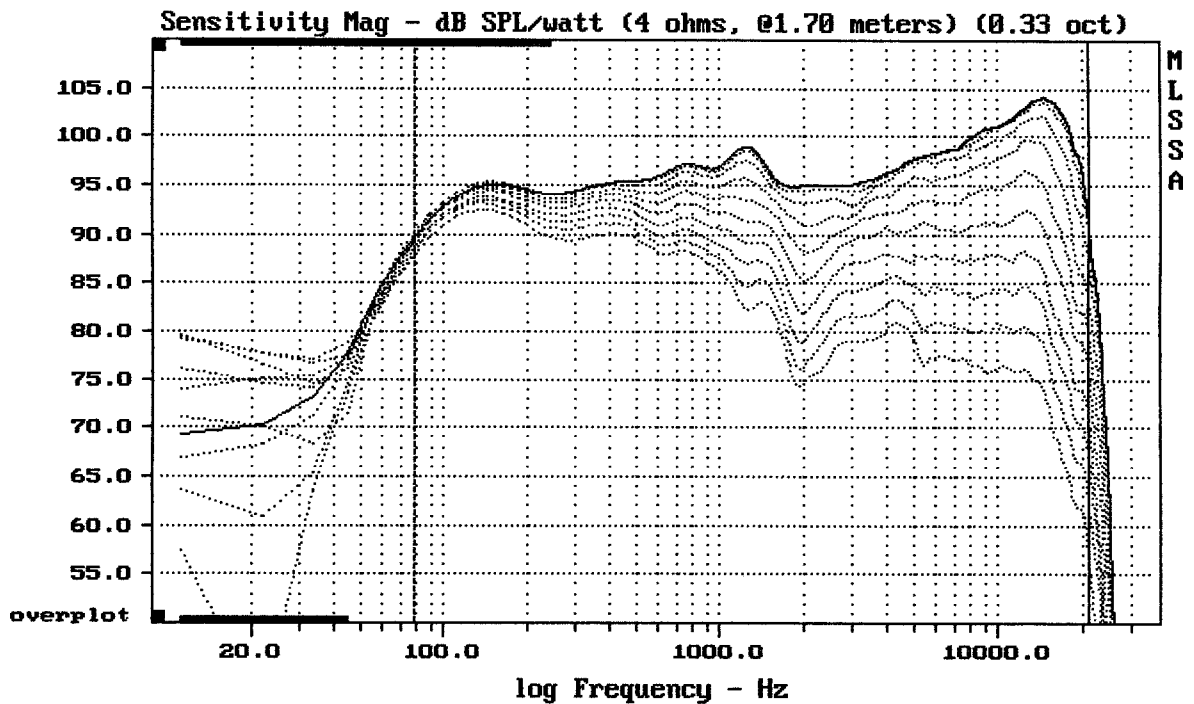


---

Overlay Compare: dev= +24/-11, std= 7.9, avg= -26

---


ART410-A MK II

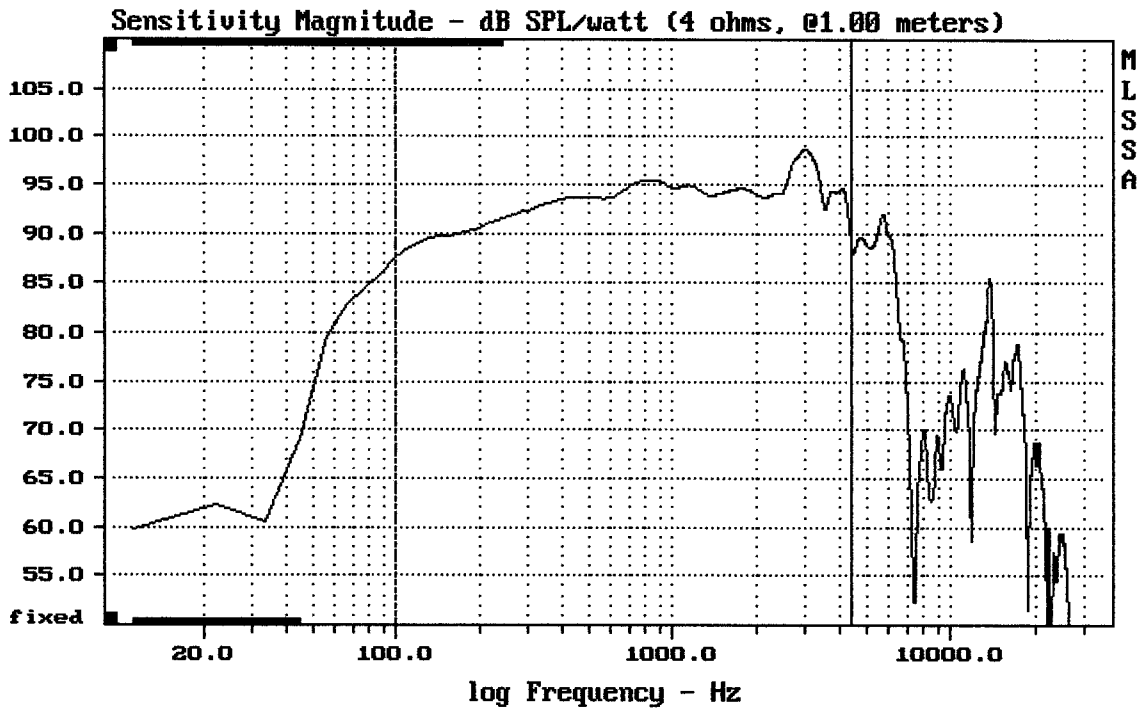

Level (100:4395 Hz) = 93.72 dB SPL/watt (4 ohms, @1.00 meters)

10" FROM ART410-A MK II

MLSSA: Frequency Domain

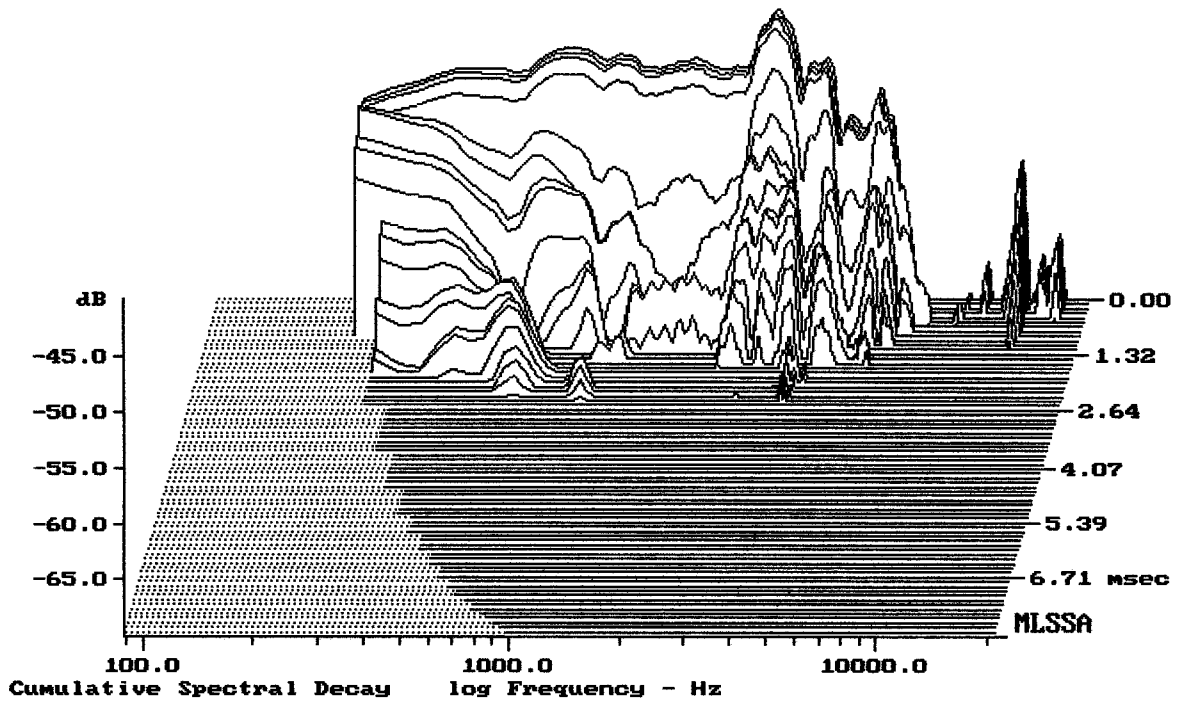

-68.63 dB, 3640 Hz (82), 2.420 msec (23)

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.33	Ohms
2	Fs	64.84	Hz
3	Re	3.74	Ohms[dc]
4	Res	45.49	Ohms
5	Qms	3.93	
6	Qes	0.32	
7	Qts	0.30	
8	L1	0.48	mH
9	L2	0.91	mH
10	R2	3.15	Ohms
11	RMSE-load	0.39	Ohms
12	Vas(Sd)	38.21	liters
13	Mms	26.57	grams
14	Cms	227	$\mu$ M/Newton
15	B1	11.20	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.7% (-20% to -50% is recommended).


10" FROM ART410-A MK II

MLSSA: Parameters

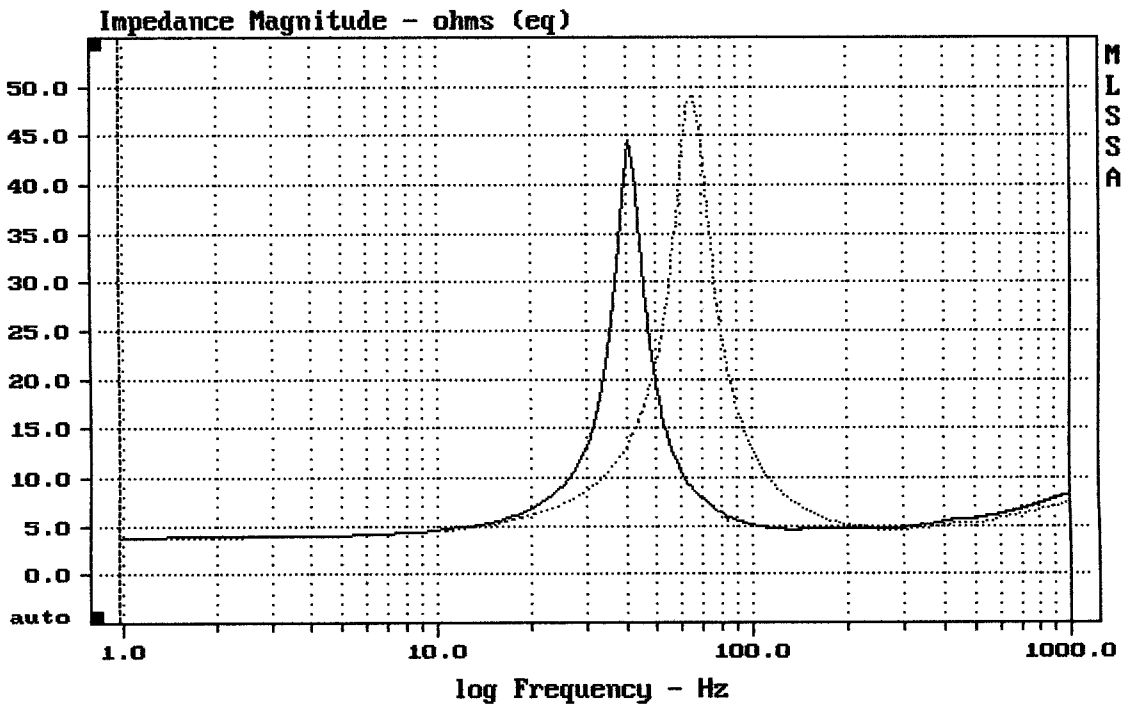

mean: 7.319, rms: 9.386, std: 5.877, max: 48.93, min: 3.825


MLSSA: Frequency Domain

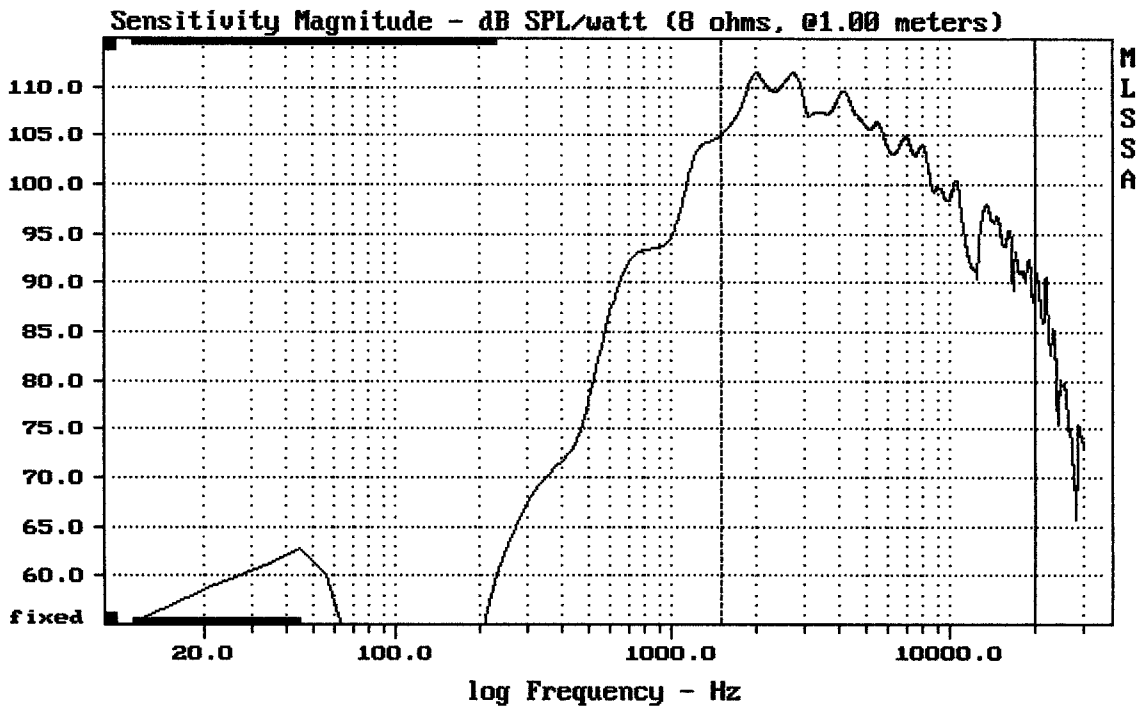


Level (1498:19997 Hz) = 106.44 dB SPL/watt (8 ohms, @1.00 meters)

1" FROM ART410-A MK II + A7570

MLSSA: Frequency Domain

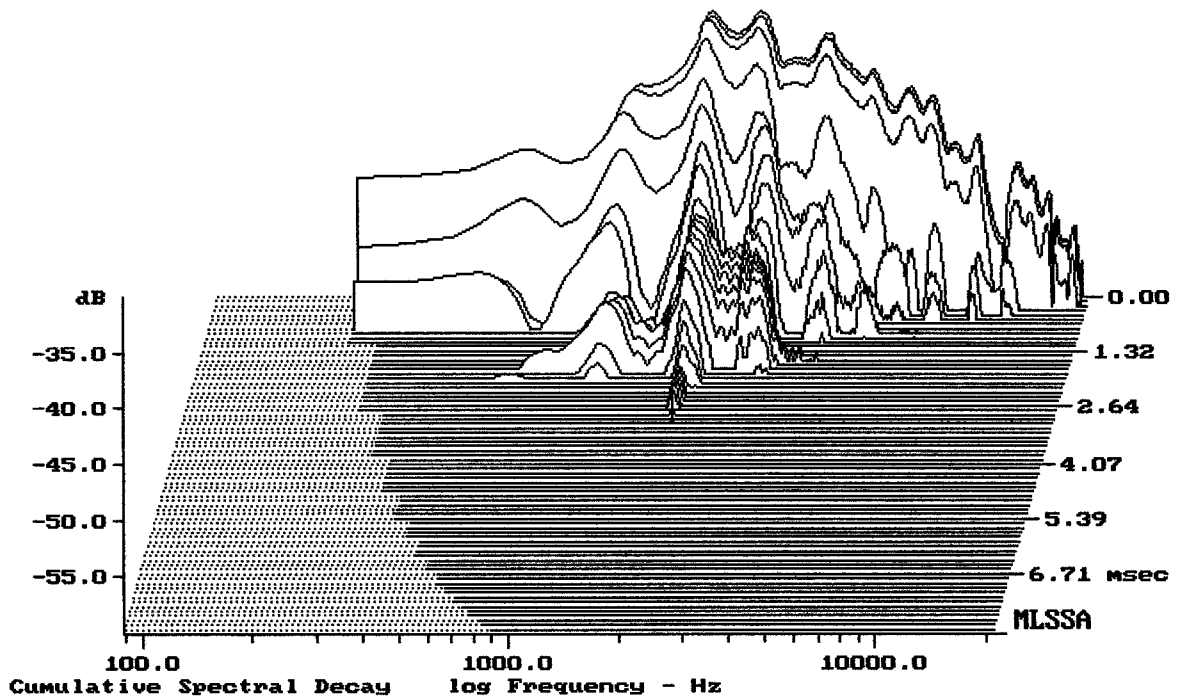

-59.57 dB, 1909 Hz (43), 2.860 msec (27)

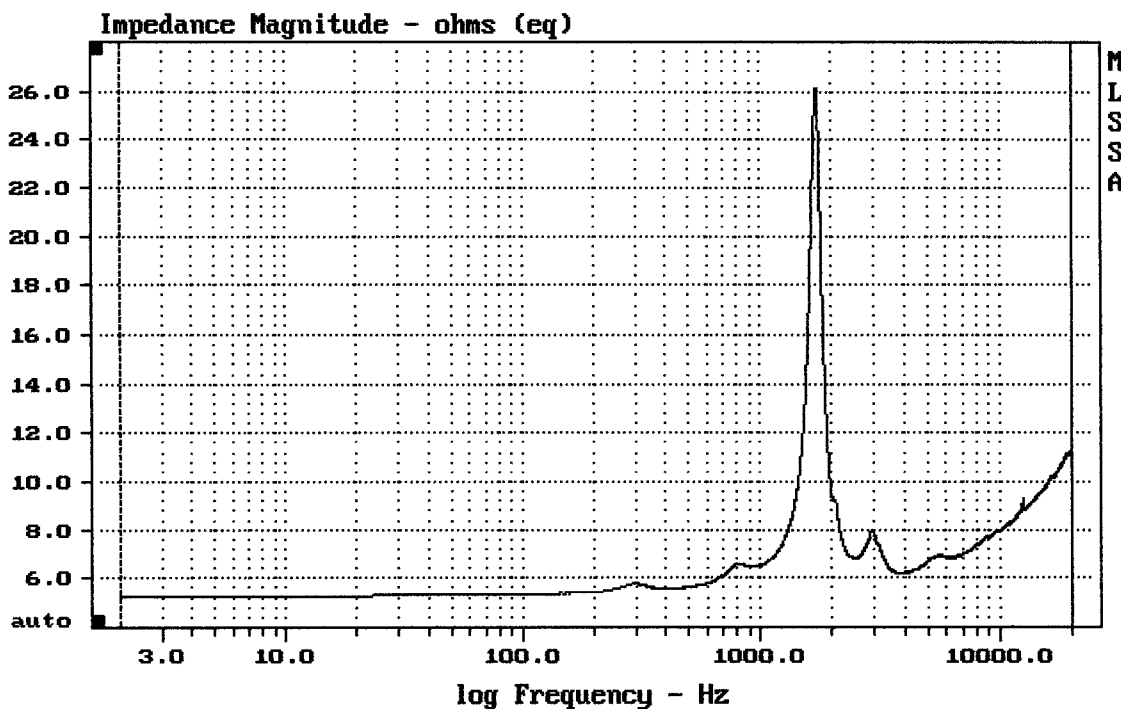


---

mean: 8.579, rms: 8.866, std: 2.237, max: 26.16, min: 5.234

---

1" FROM ART410-A MK II

MLSSA: Frequency Domain

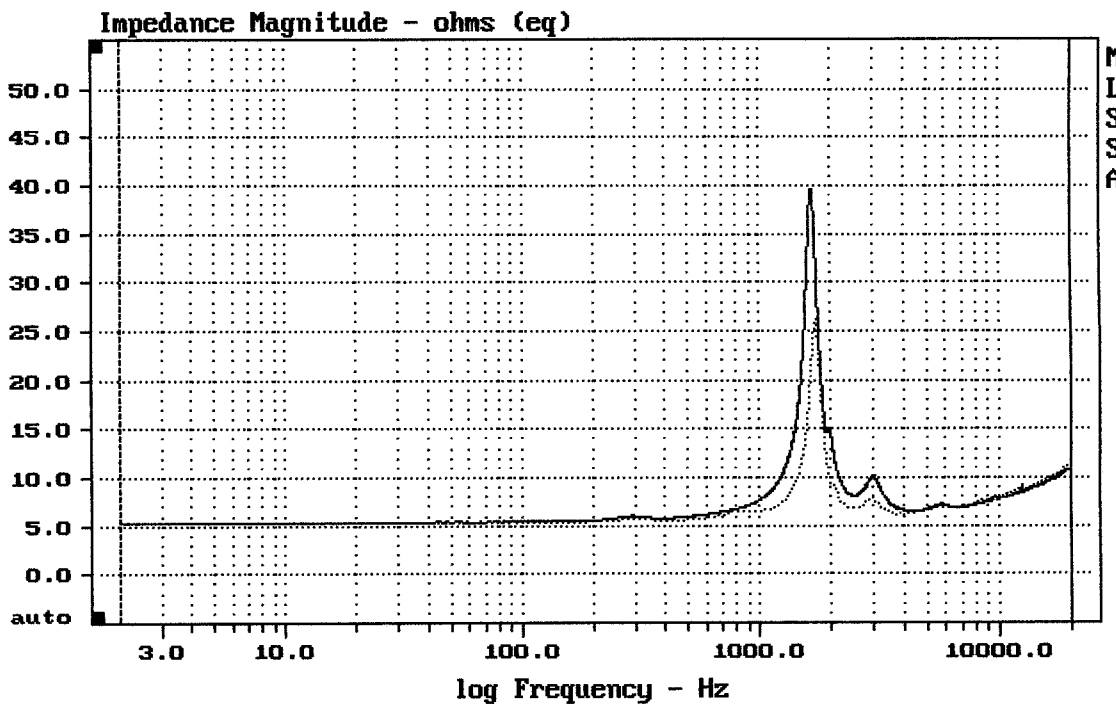

---

Overlay Compare: dev= +18/-0.76, std= 1.8, avg= 0.28

---

DTTO / ND1411-M ———