



Level (89:22605 Hz) = 87.20 dB SPL/watt (8 ohms, @1.30 meters)

MLSSA: Frequency Domain

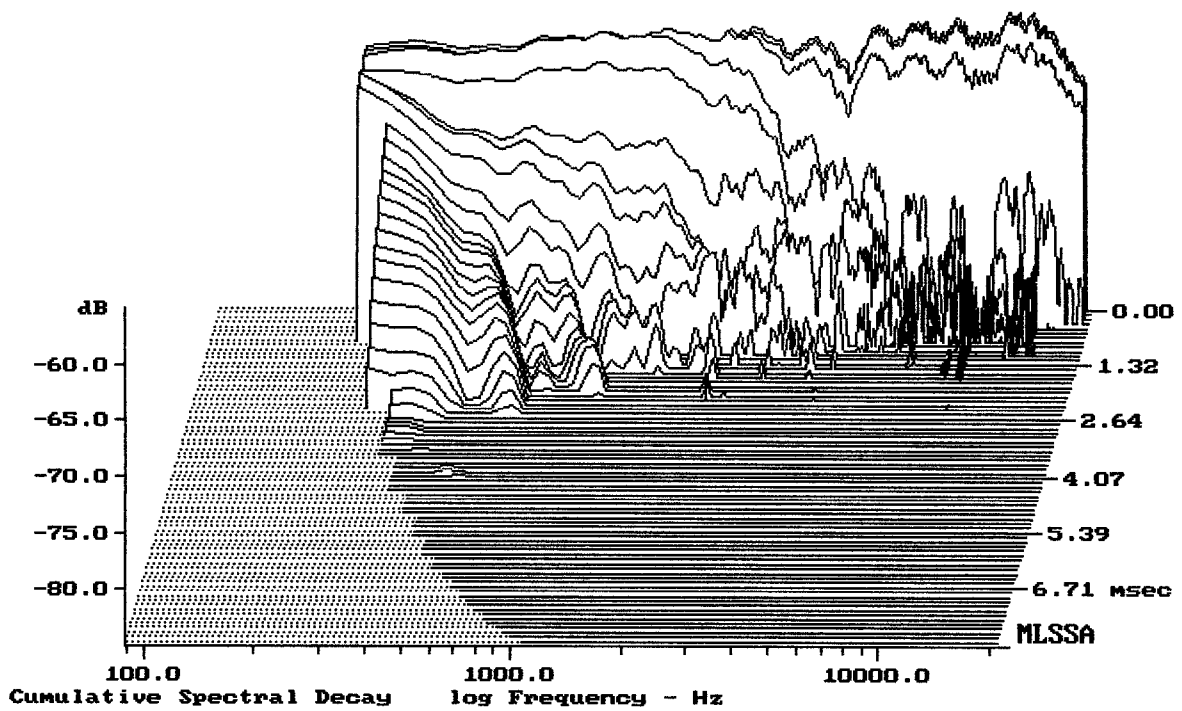


-84.24 dB, 2175 Hz (49), 2.090 msec (20)

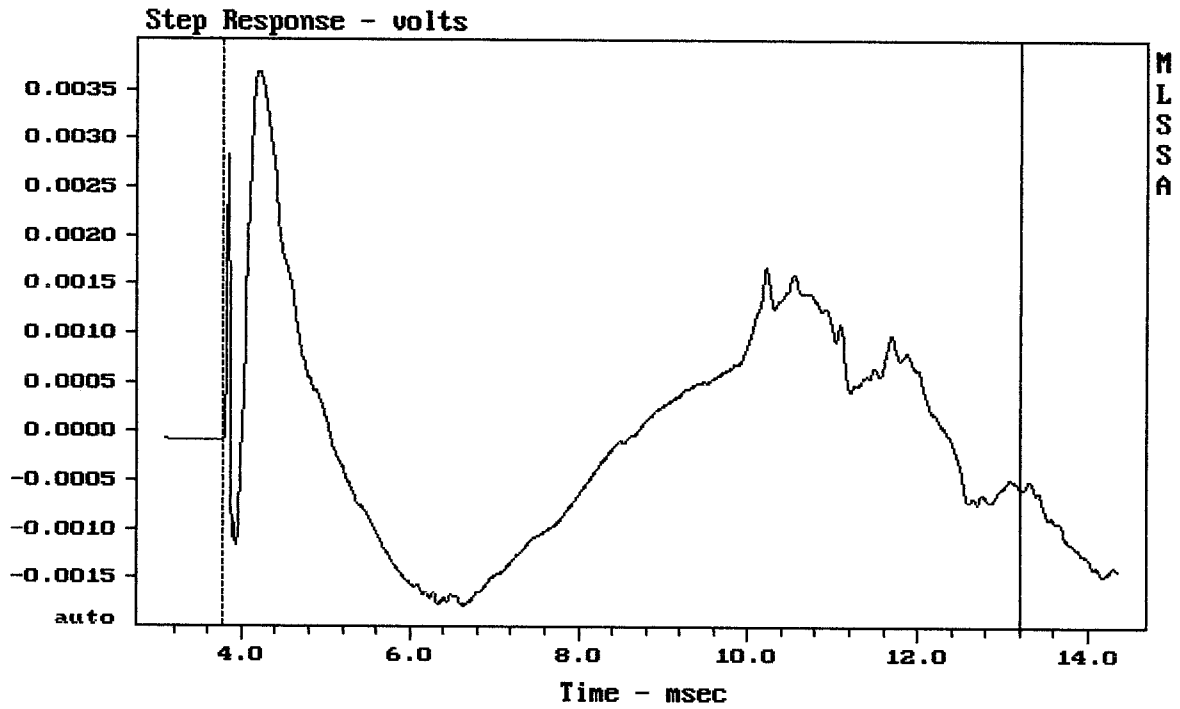

mean: 1.567e-005, rms: 0.00116, std: 0.00116, max: 0.003668, min: -0.001777


EAW UB12Se

MLSSA: Time Domain

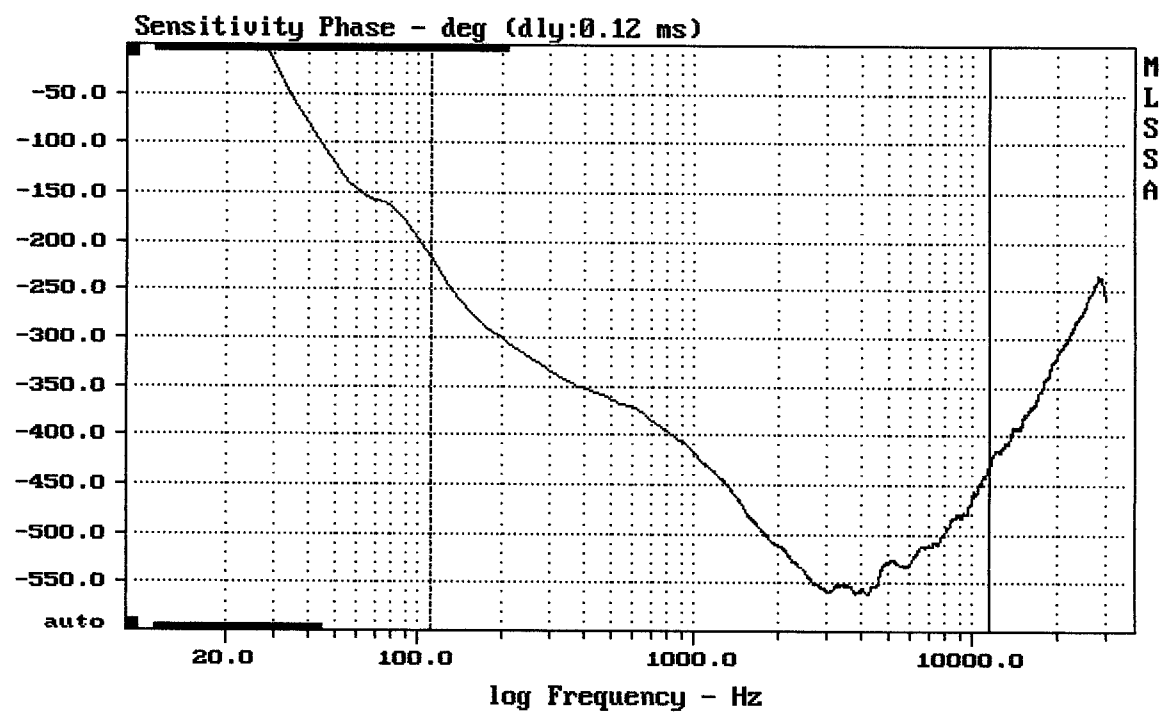

mean: -493.6, rms: 496.6, std: 54.46, max: -217.1, min: -561.1


EAW UB12Se

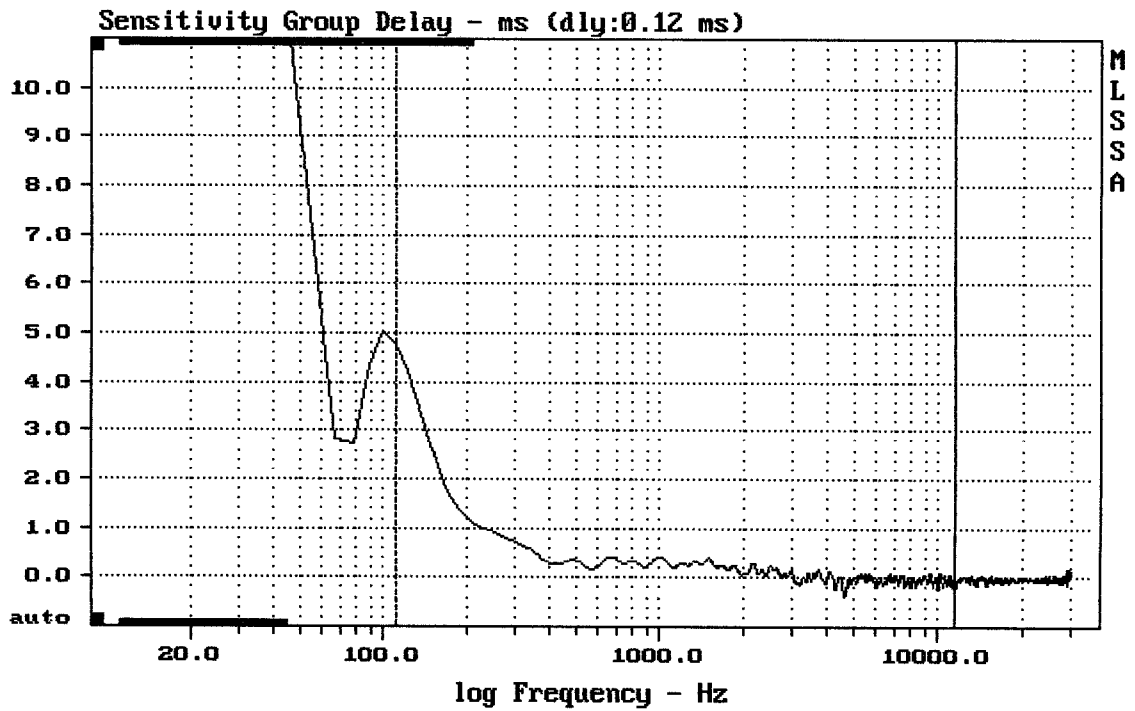

mean: 0.05495, rms: 0.3248, std: 0.3201, max: 4.783, min: -0.3923


EAW UB12Se

MLSSA: Frequency Domain

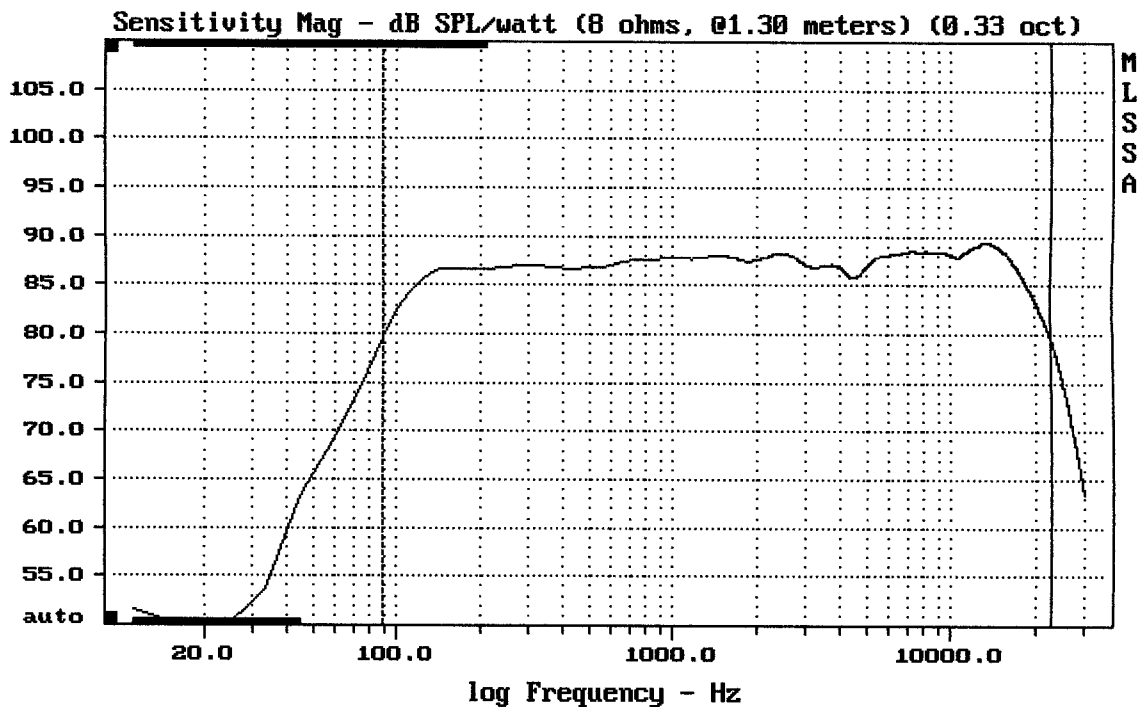

mean: 87.18, rms: 87.39, std: 1.74, max: 89.38, min: 79.65


EAW UB12Se

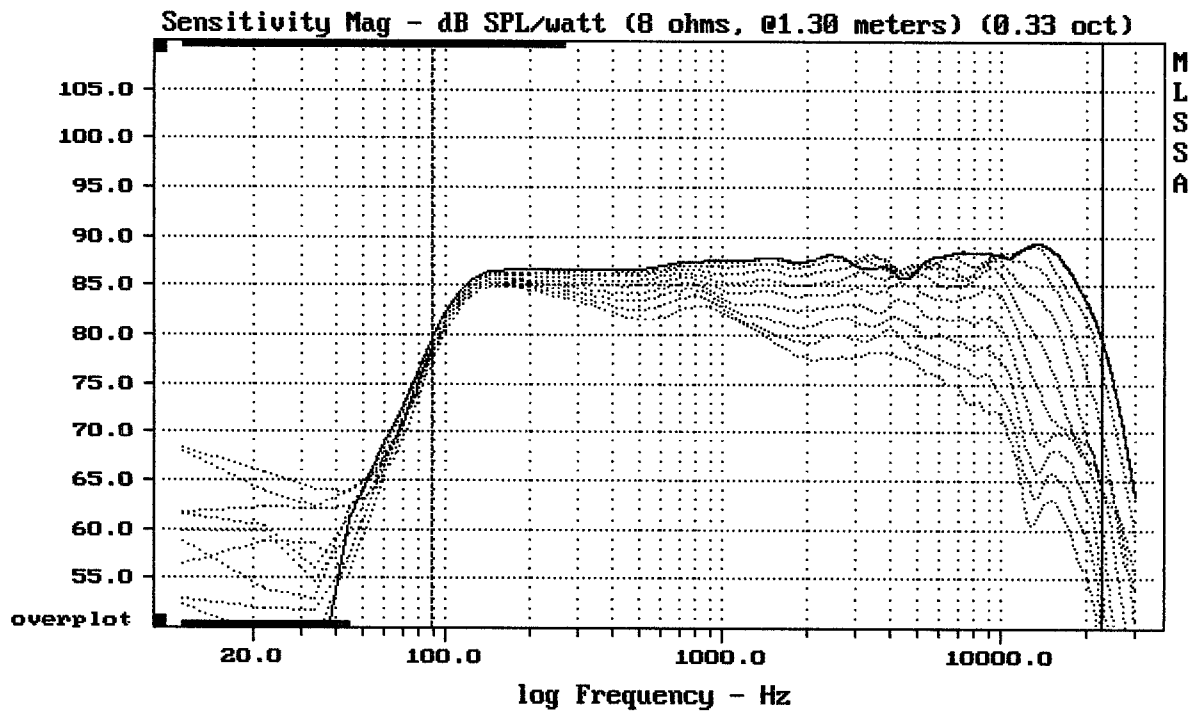

Overlay Compare: dev= +18/-15, std= 8.5, avg= -20


EAW UB12Se

MLSSA: Frequency Domain

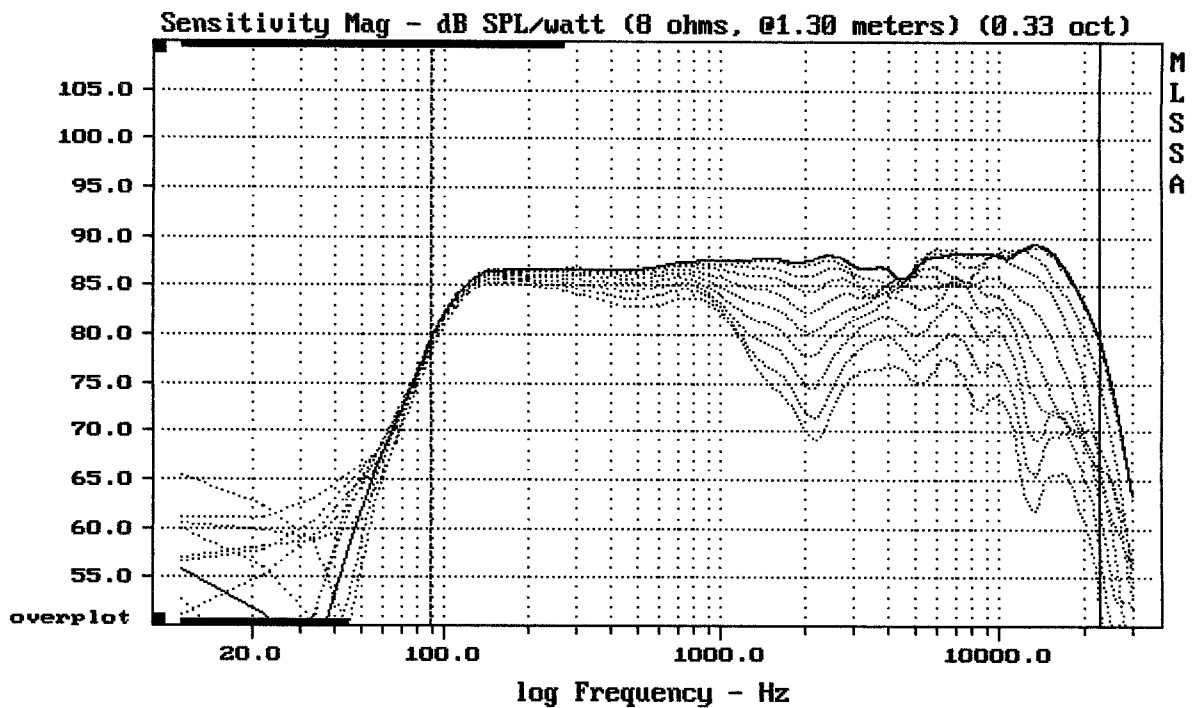

Overlay Compare: dev= +17/-9.5, std= 6.3, avg= -18


EAW UB12Se

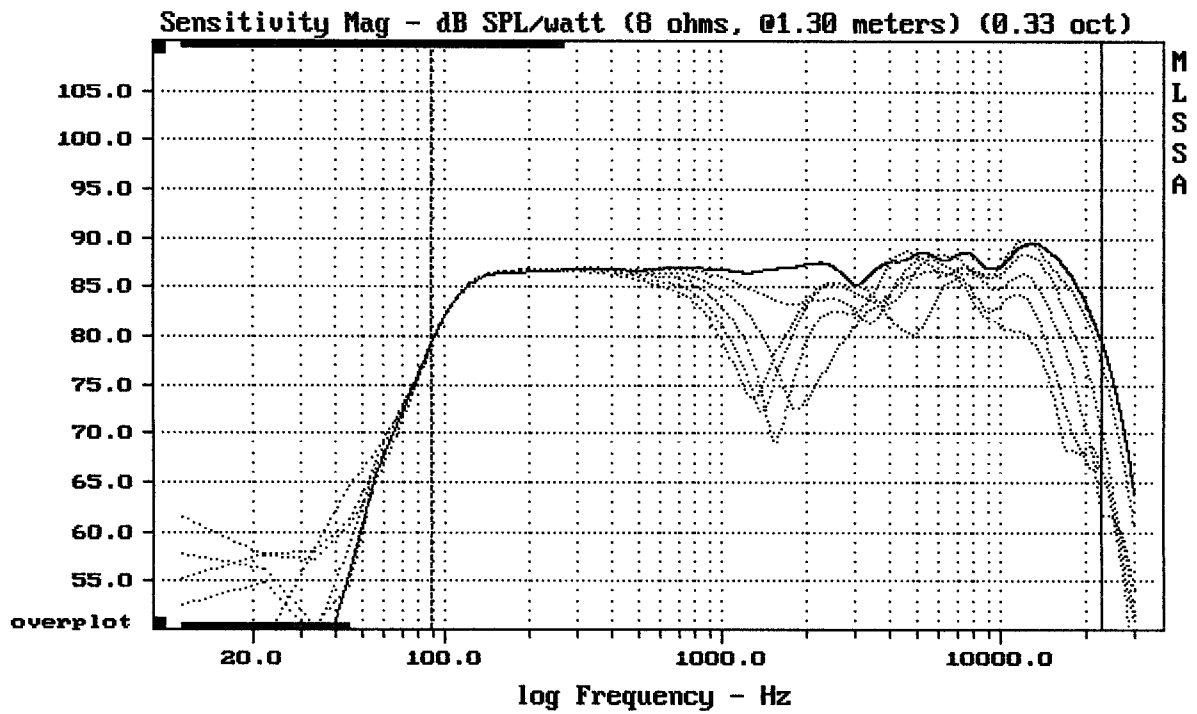

Overlay Compare: dev= +9.6/-9, std= 5.4, avg= -9.5


EAW UB12Se

MLSSA: Frequency Domain

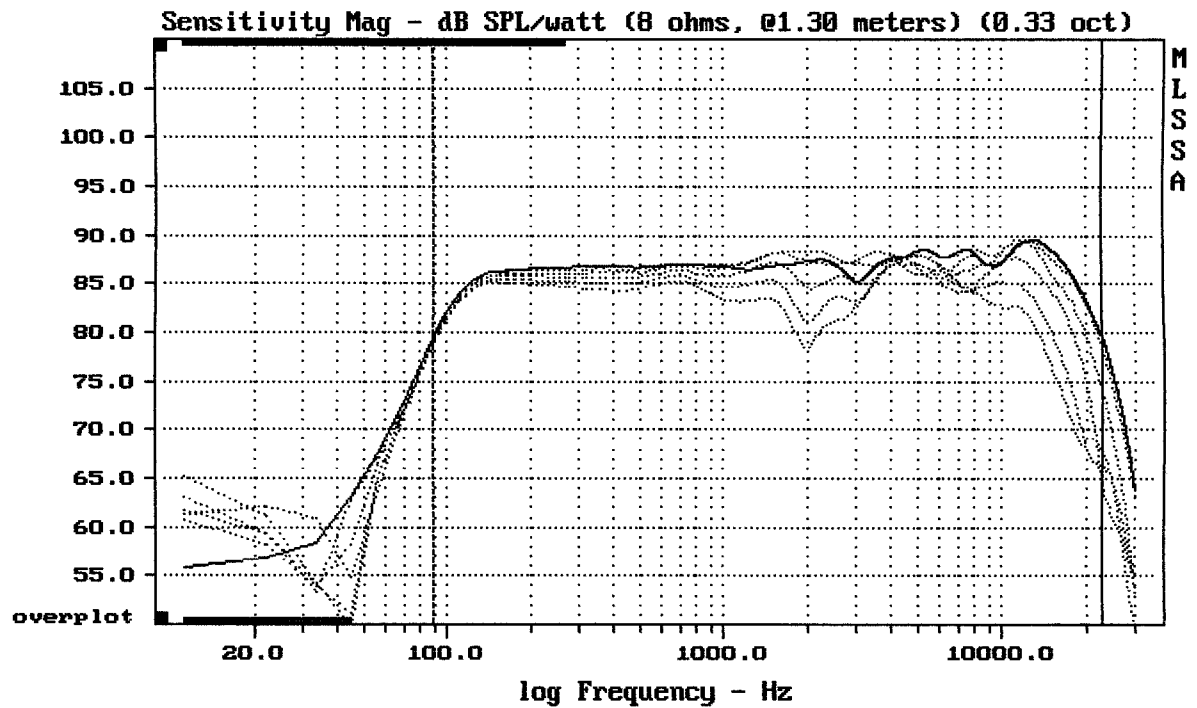

Overlay Compare: dev= +7.3/-8.2, std= 5, avg= -8

EAW UB12Se

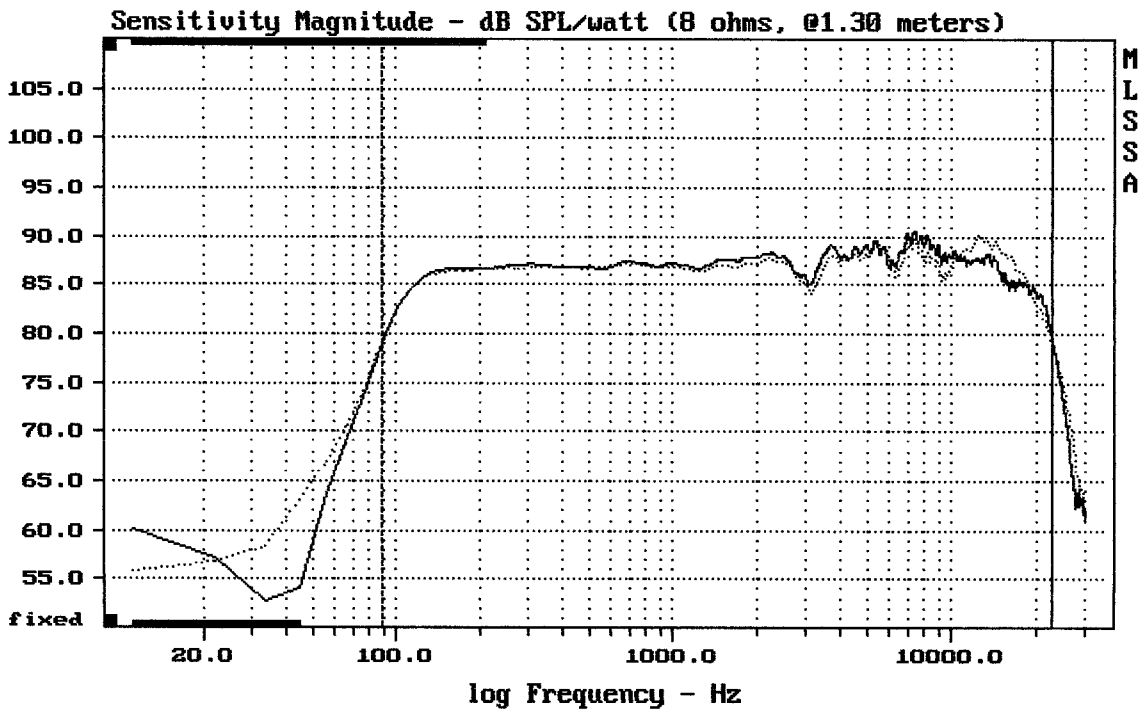


Overlay Compare: dev= +2.3/-3.3, std= 1.4, avg= -0.055

EAW UB12Se

Smith


MLSSA: Frequency Domain

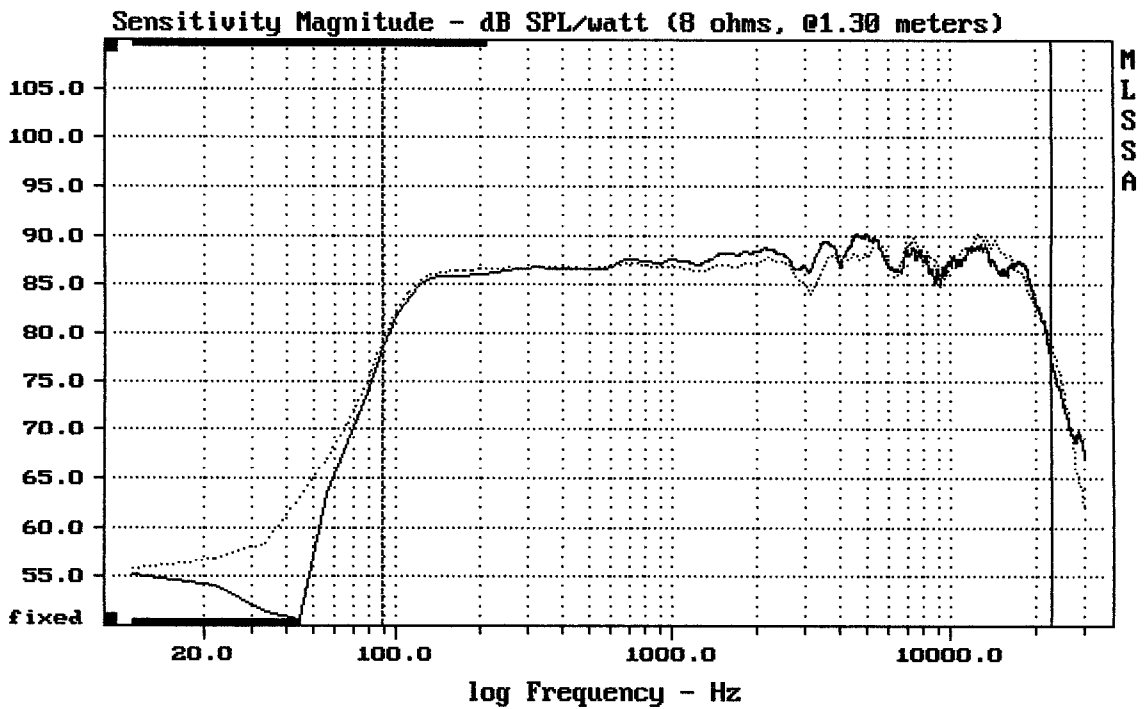

Overlay Compare: dev= +3/-2.5, std= 1.2, avg= -0.079

EAW UB12Se

Smith, A. MOUNTAIN

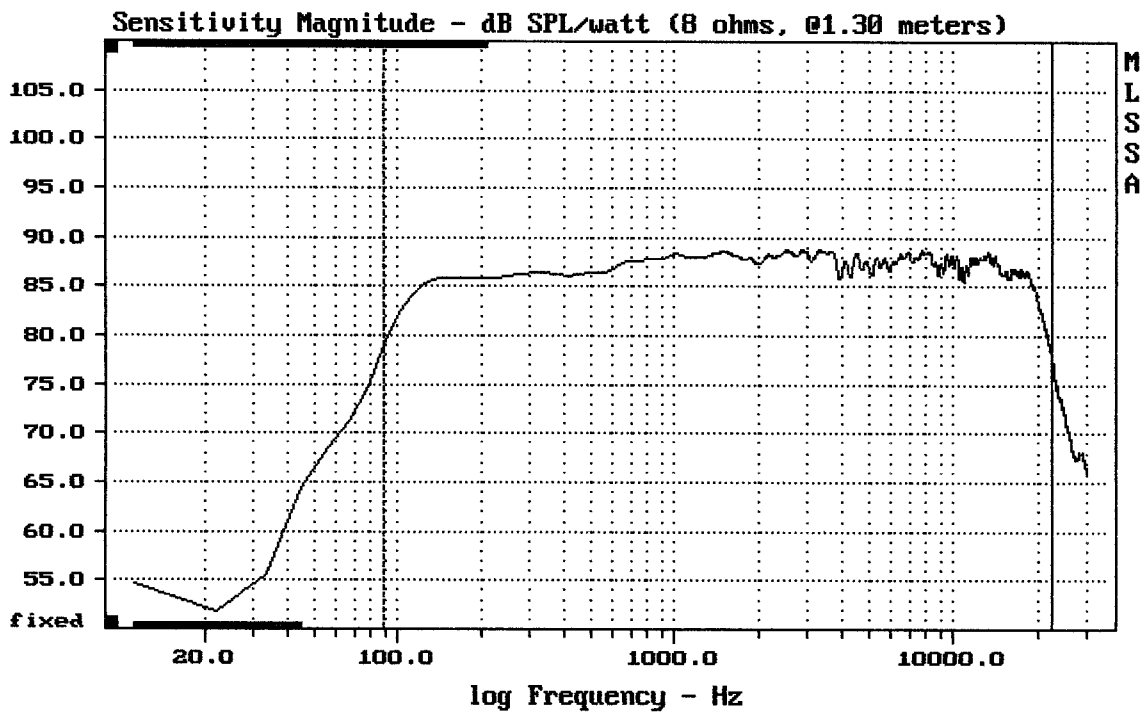


mean: 86.71, rms: 86.90, std: 1.65, max: 88.79, min: 77.90

EAW UB12Se

Змітка Power @


MLSSA: Frequency Domain

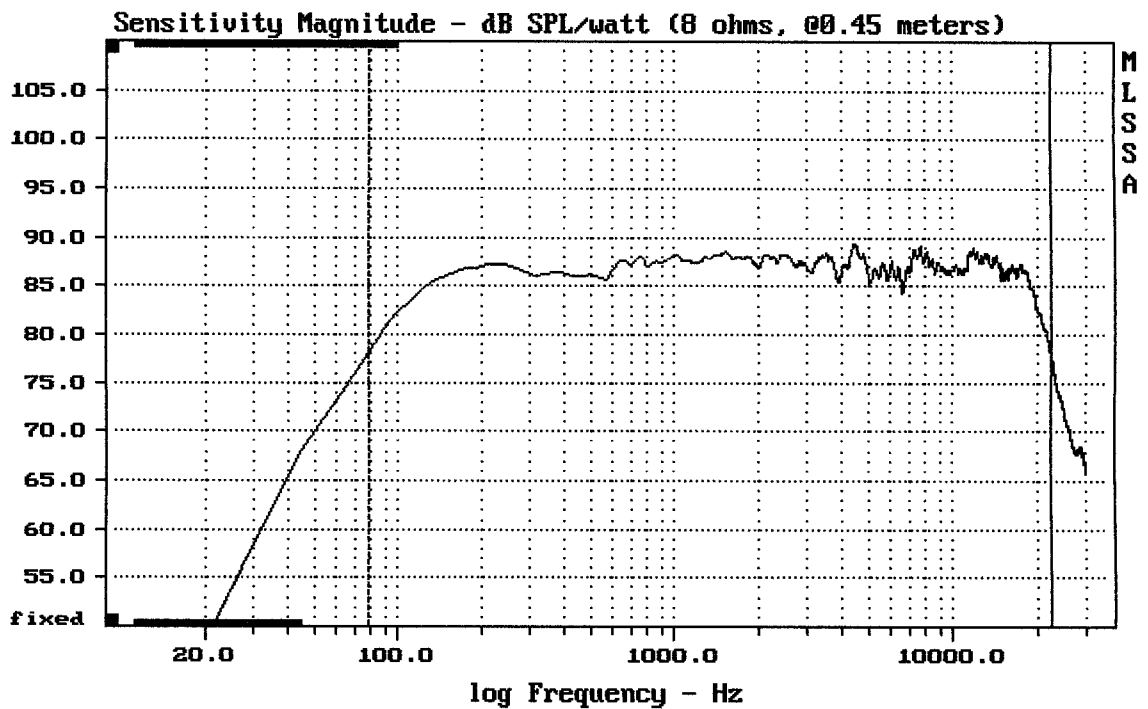

Level (78:22605 Hz) = 86.75 dB SPL/watt (8 ohms, @0.45 meters)


EAW UB12Se

одна змітка і а во кпд

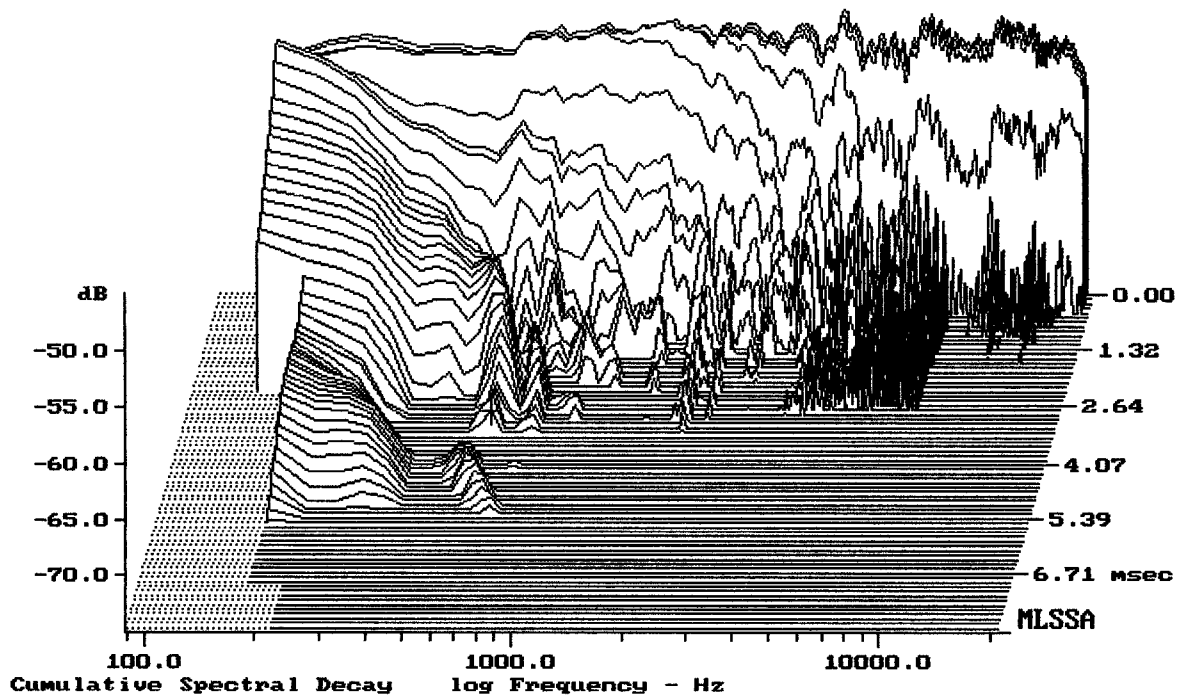


-73.13 dB, 621 Hz (14), 3.300 msec (31)

DTTO

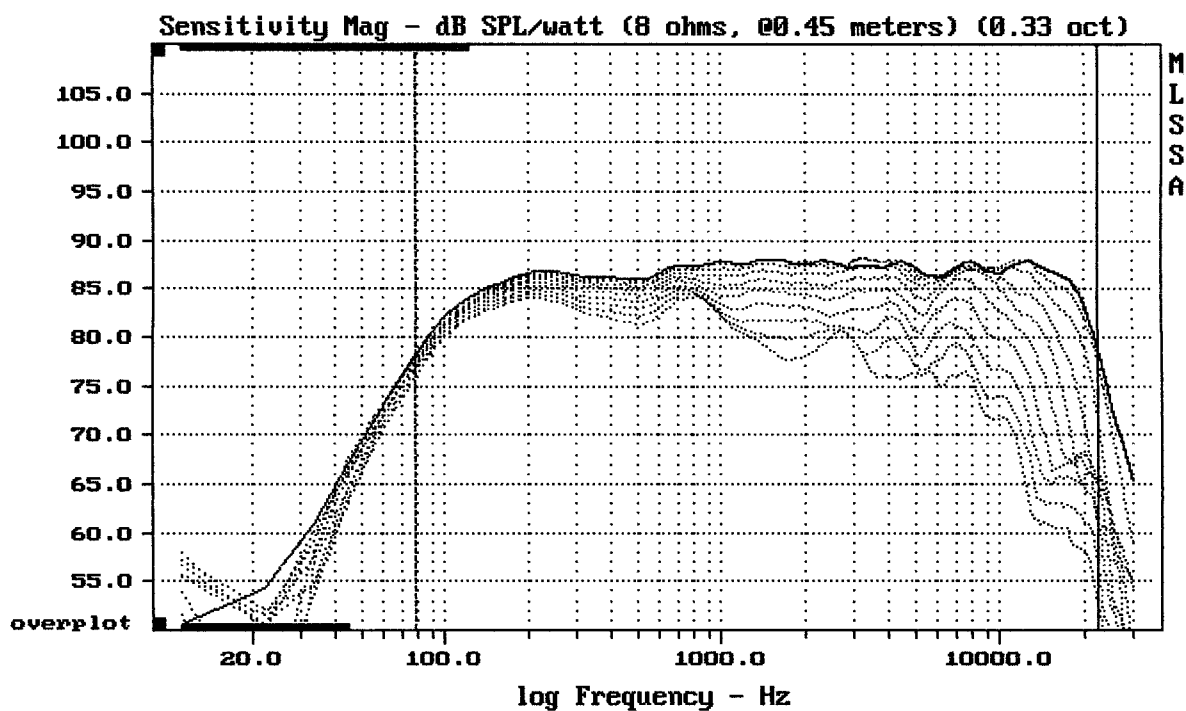


Overlay Compare: dev= +16/-8.7, std= 7.6, avg= -18

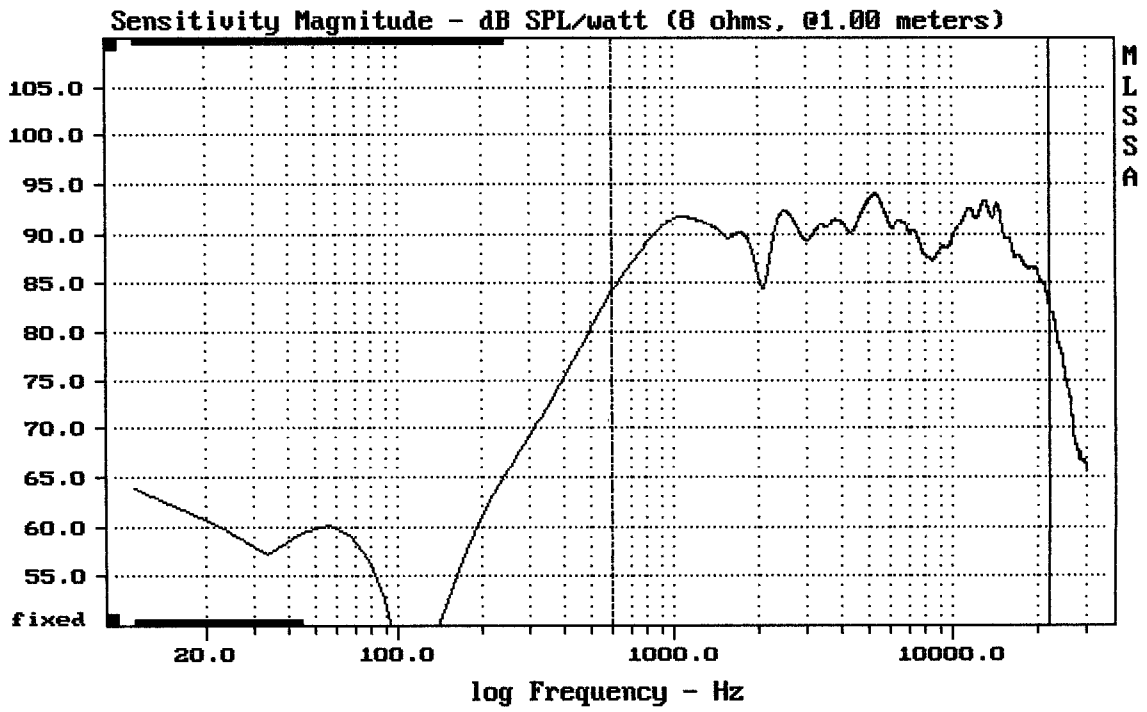


Level (599:22006 Hz) = 90.36 dB SPL/watt (8 ohms, @1.00 meters)

TWEETER PEERLESS FROM EAW UB12Se

MLSSA: Frequency Domain

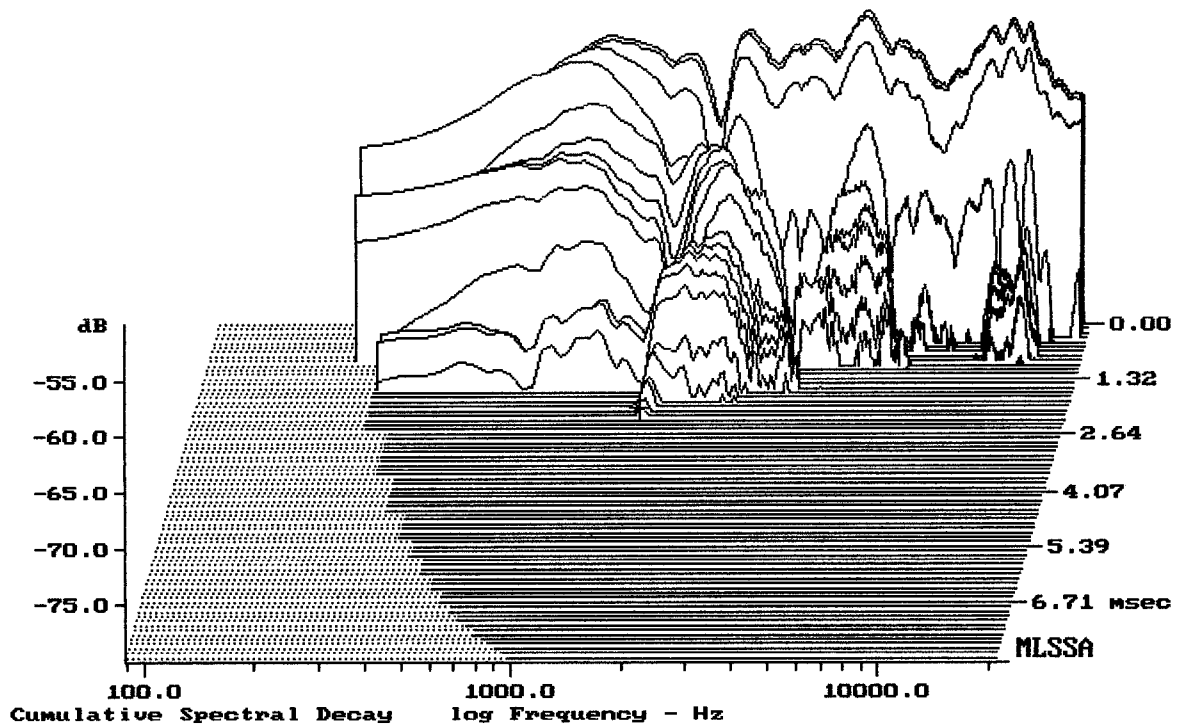


-79.37 dB, 1465 Hz (33), 2.200 msec (21)

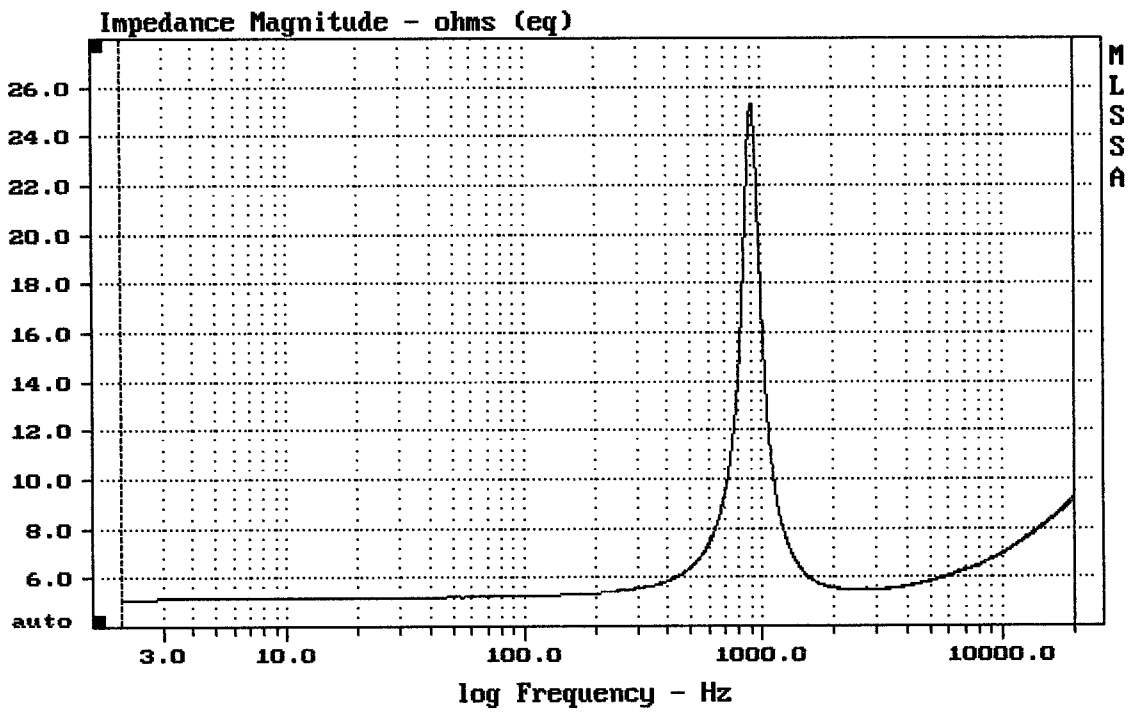


TWEETER PEERLESS FROM EAW UB12Se

MLSSA: Frequency Domain

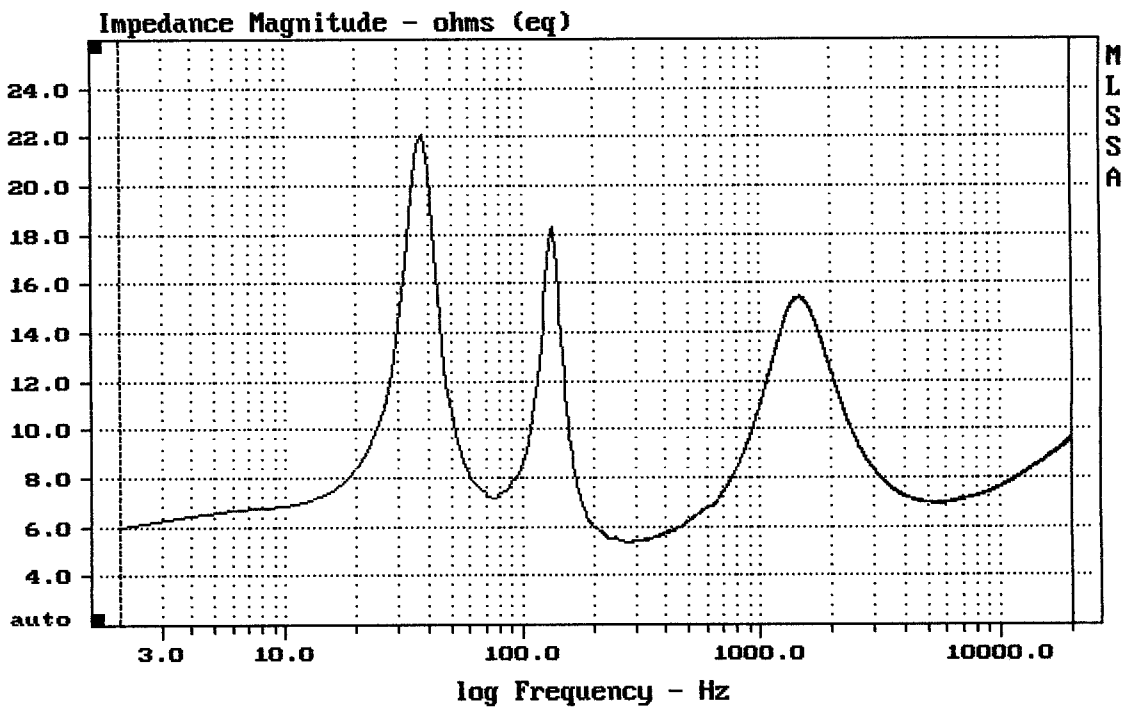


EAW UB12Se

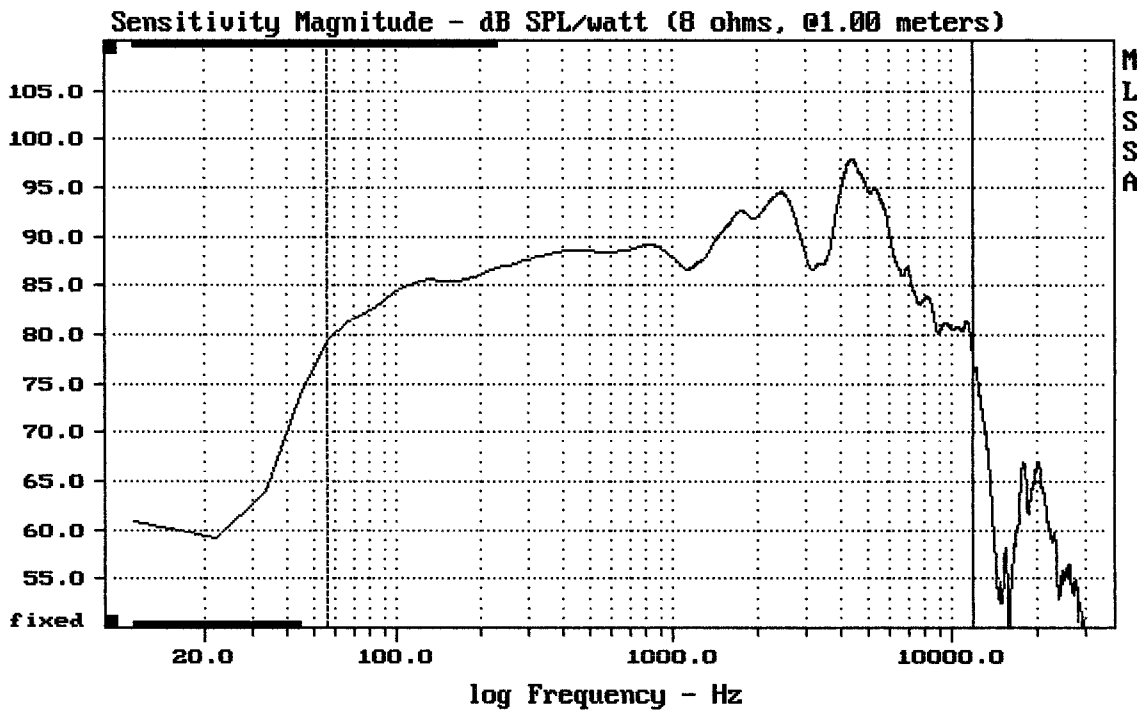

Level (55:11808 Hz) = 89.48 dB SPL/watt (8 ohms, @1.00 meters)

5" from EAW UB12Se

MLSSA: Frequency Domain

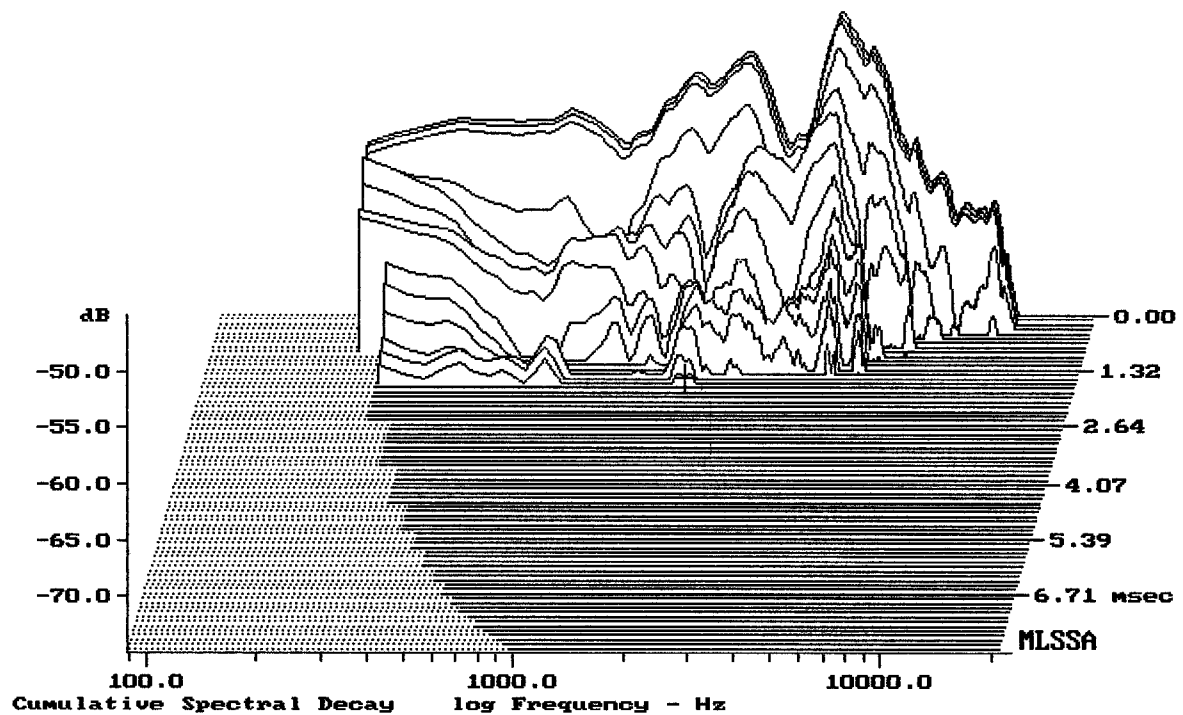


-74.46 dB, 1820 Hz (41), 1.650 msec (16)

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	0.21	Ohms	
2	Fs	67.28	Hz	
3	Re	5.53	Ohms[dc]	
4	Res	32.75	Ohms	
5	Qms	3.36		
6	Qes	0.57		
7	Qts	0.48		
8	L1	0.37	mH	
9	L2	0.40	mH	
10	R2	1.55	Ohms	
11	RMSE-load	0.24	Ohms	
12	Vas(Sd)	9.35	liters	
13	Mms	6.30	grams	
14	Cms	888	$\mu\text{M}/\text{Newton}$	
15	B1	5.10	Tesla-M	
16	SPLref(Sd)	88.8	dB[Re]	
17	Rub-index	0.09		

Method: Mass-loaded (10.00 grams) Area (Sd): 86.59 sq cm
DCR mode: Measure (-0.12 ohms) QC file: CLOSED
Analysis successful. Shift in Fs = -37.7% (-20% to -50% is recommended).

5" FROM EAW UB12Se

MLSSA: Parameters

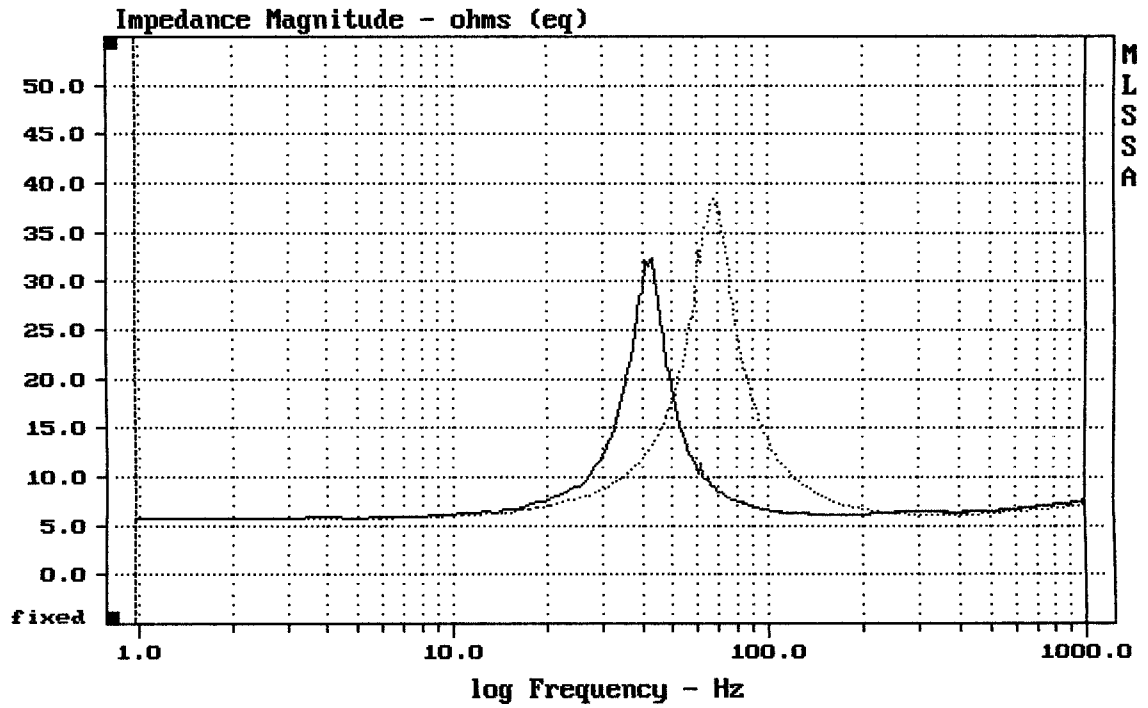

mean: 7.815, rms: 9.058, std: 4.58, max: 38.5, min: 5.635

MLSSA: Frequency Domain