



E-shop: <http://eshop.prodance.cz/4pro-1031a/d-97126/>

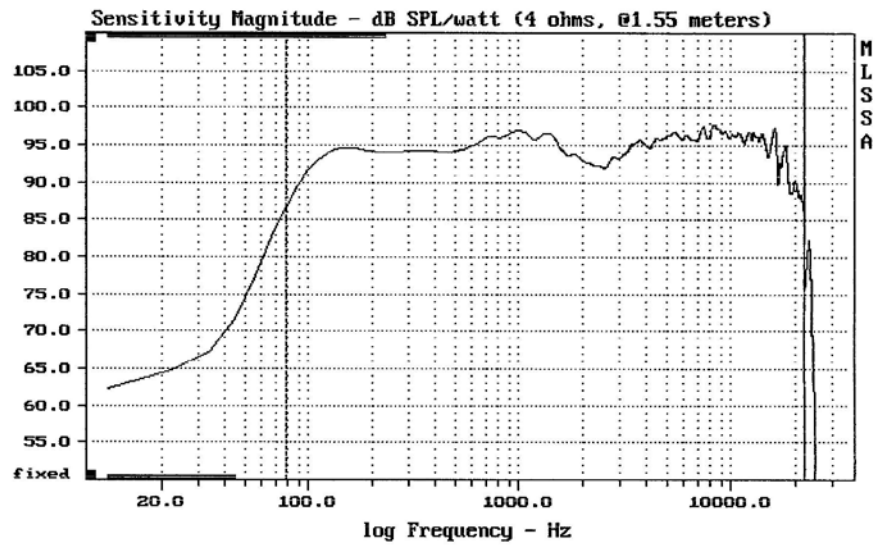

mean: 94.76, rms: 95.06, std: 2.06, max: 97.82, min: 85.98


4PRO 1031-A

MLSSA: Frequency Domain

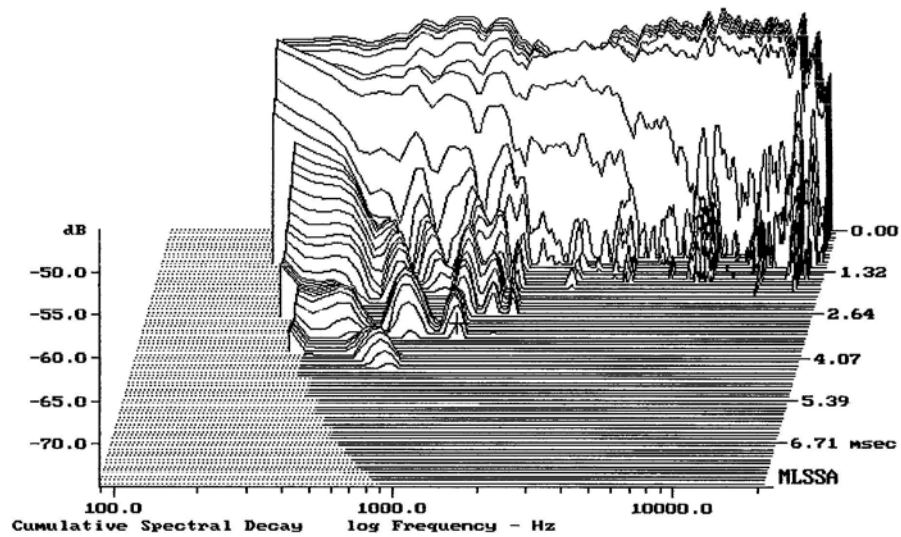

-73.33 dB, 1199 Hz (27), 3.410 msec (32)


E-shop: <http://eshop.prodance.cz/4pro-1031a/d-97126/>

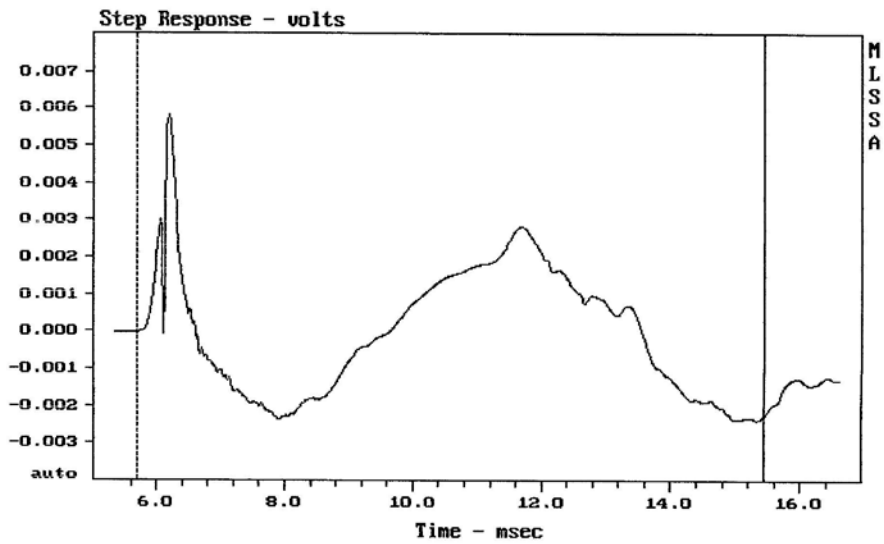

mean: $-5.177e-005$, rms: 0.001703, std: 0.001702, max: 0.00581, min: -0.002388


4PRO 1031-A

MLSSA: Time Domain

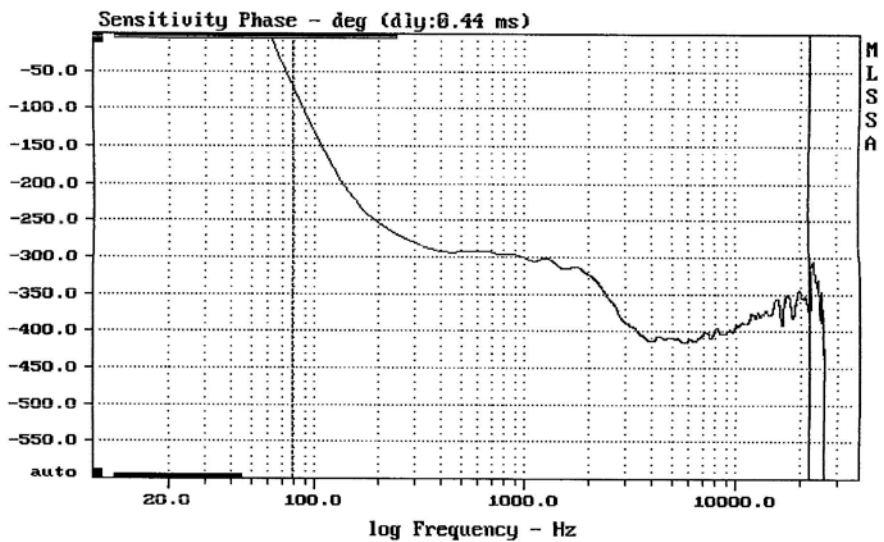

mean: -373.7, rms: 375.2, std: 33.79, max: -69.34, min: -415.7


4PRO 1031-A

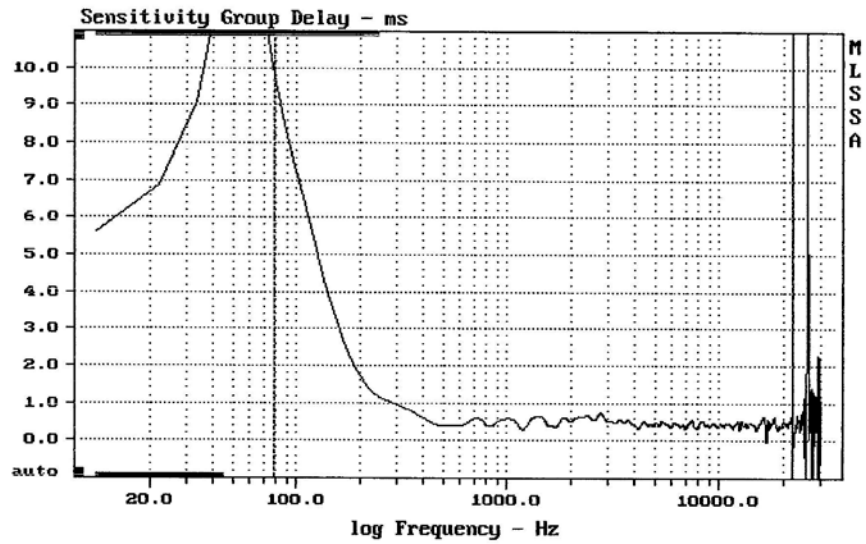

mean: 0.4803, rms: 0.6263, std: 0.4019, max: 9.773, min: -0.03348

4PRO 1031-A


MLSSA: Frequency Domain

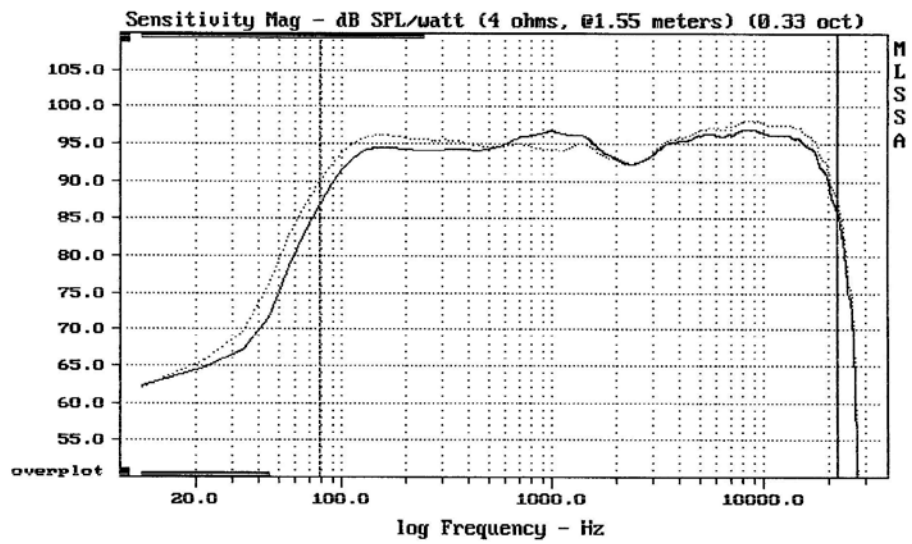

Overlay Compare: dev= +2/-3.5, std= 0.73, avg= 1

4PRO 1031-A


E-shop: <http://eshop.prodance.cz/4pro-1031a/d-97126/>

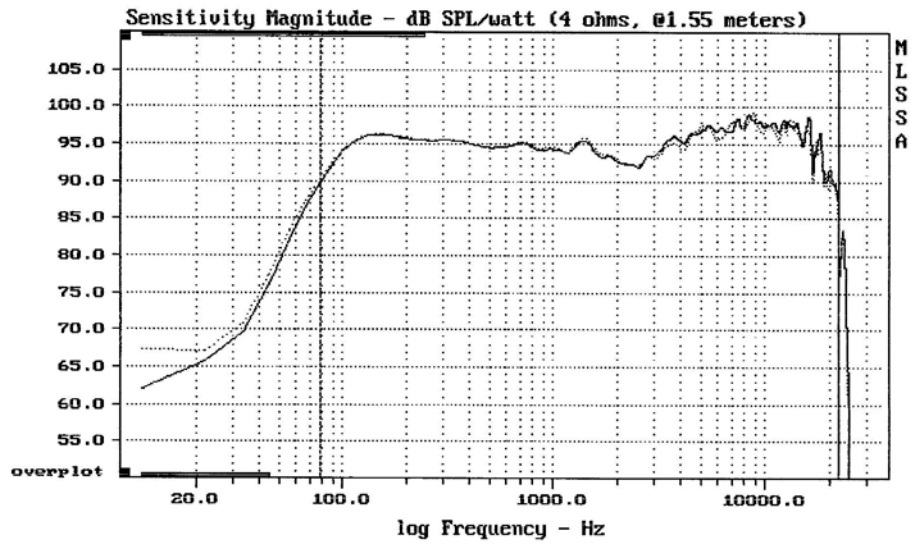

Overlay Compare: dev= +1.7/-2.3, std= 0.77, avg= -0.38

4PRO 1031-A


MLSSA: Frequency Domain

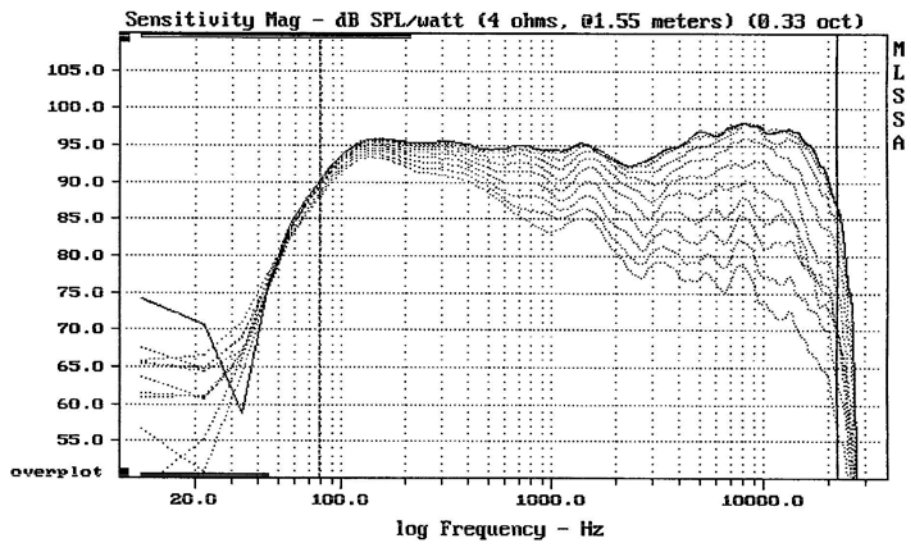

Overlay Compare: dev= +20/-7.3, std= 5.8, avg= -22

4PRO 1031-A

E-shop: <http://eshop.prodance.cz/4pro-1031a/d-97126/>

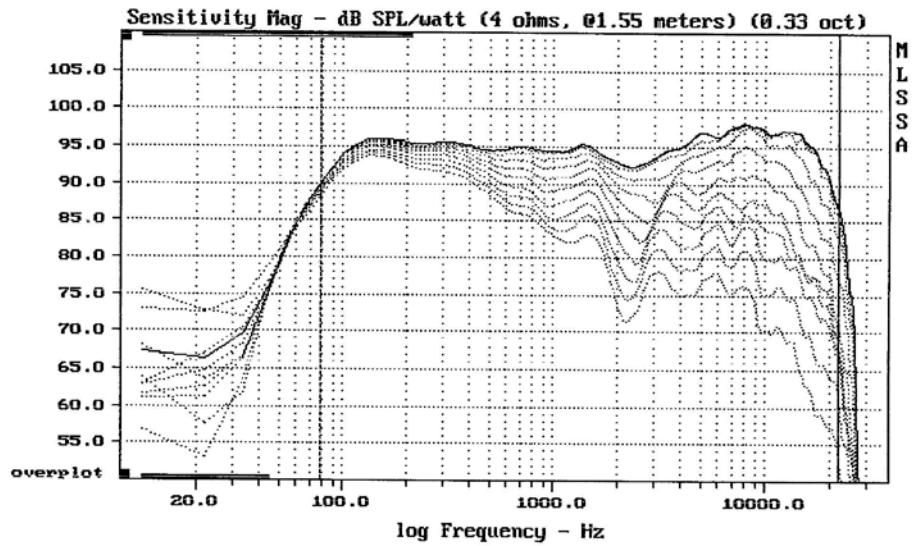


Overlay Compare: dev= +24/-9.7, std= 7.4, avg= -26

4PRO 1031-A

9-15-92 8:40 PM


MLSSA: Frequency Domain

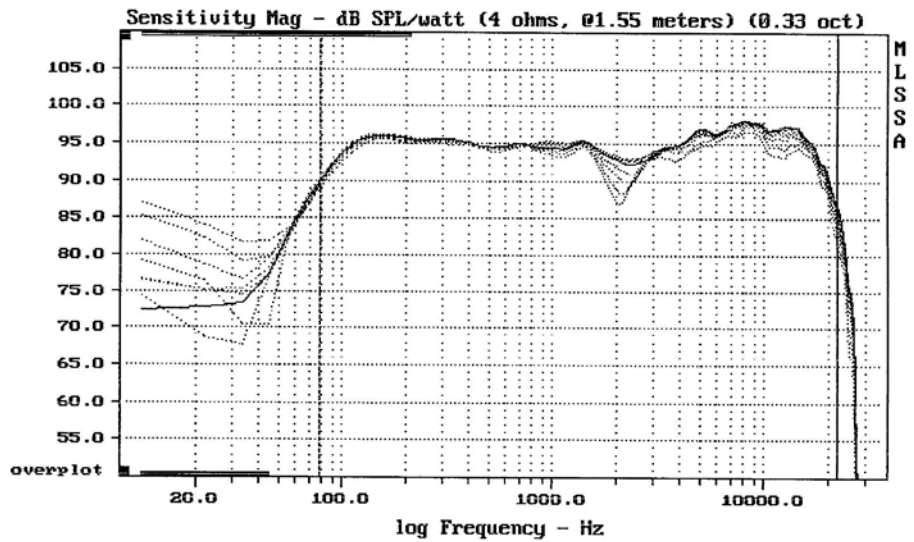

Overlay Compare: dev= +3.1/-3.5, std= 1.2, avg= -2.2

4PRO 1031-A


E-shop: <http://eshop.prodance.cz/4pro-1031a/d-97126/>

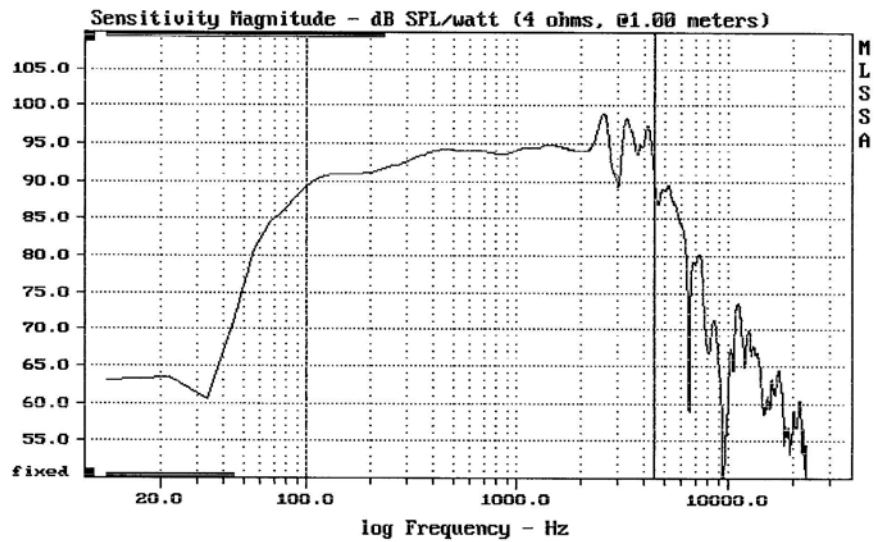

Level (100:4506 Hz) = 93.81 dB SPL/watt (4 ohms, @1.00 meters)

10" FROM 4PRO 1031-A

MLSSA: Frequency Domain

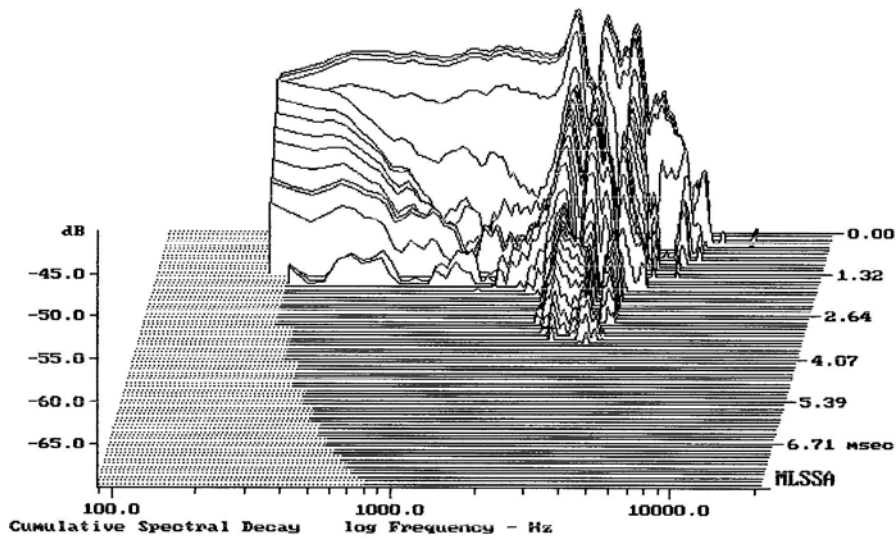

-68.65 dB, 2619 Hz (59), 3.410 msec (32)

E-shop: <http://eshop.prodance.cz/4pro-1031a/d-97126/>

MLSSA SPO 4.0D #960903-3057-3075

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	0.19	Ohms	
2	Fs	65.22	Hz	
3	Re	3.20	Ohms[dc]	
4	Res	51.72	Ohms	
5	Qms	6.52		
6	Qes	0.40		
7	Qts	0.38		
8	L1	0.45	mH	
9	L2	0.61	mH	
10	R2	2.15	Ohms	
11	RMSE-load	0.30	Ohms	
12	Vas(Sd)	33.23	liters	
13	Mms	30.19	grams	
14	Cms	197	$\mu\text{M}/\text{Newton}$	
15	B1	9.91	Tesla-M	
16	SPLref(Sd)	95.4	dB[Re]	
17	Rub-index	0.01		

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.9% (-20% to -50% is recommended).

10" FROM 4PRO 1031-A

MLSSA: Parameters

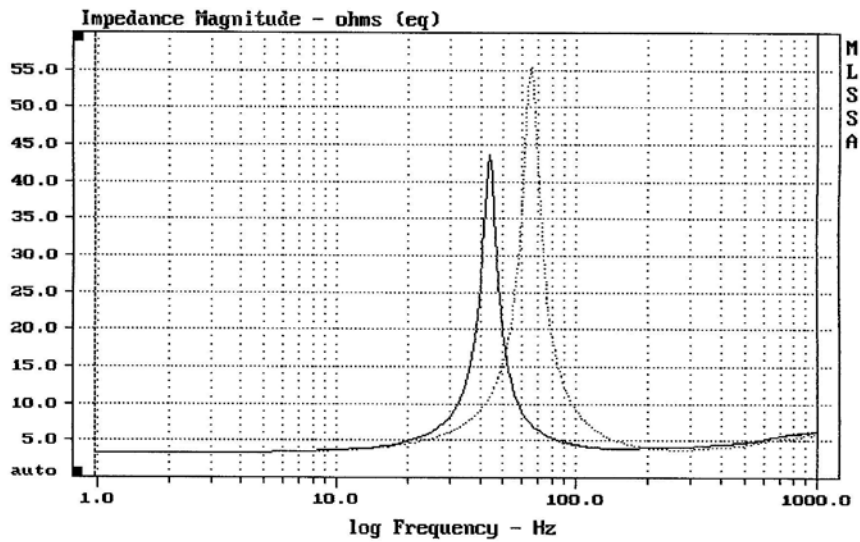

mean: 5.927, rms: 8.087, std: 5.501, max: 55.4, min: 3.23

MLSSA: Frequency Domain