



eShop: <http://eshop.prodance.cz/art-715a-mkii/d-97057/>

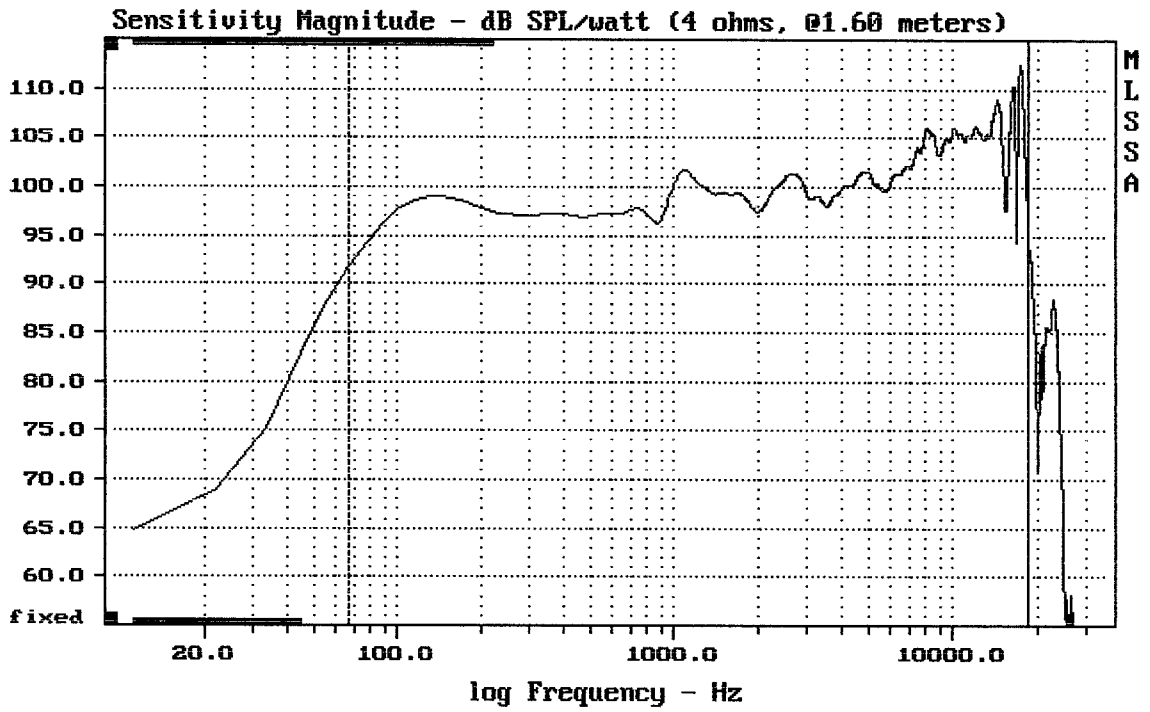


mean: 103.88, rms: 104.66, std: 3.20, max: 112.51, min: 91.35

ART715-A MK II

MLSSA: Frequency Domain

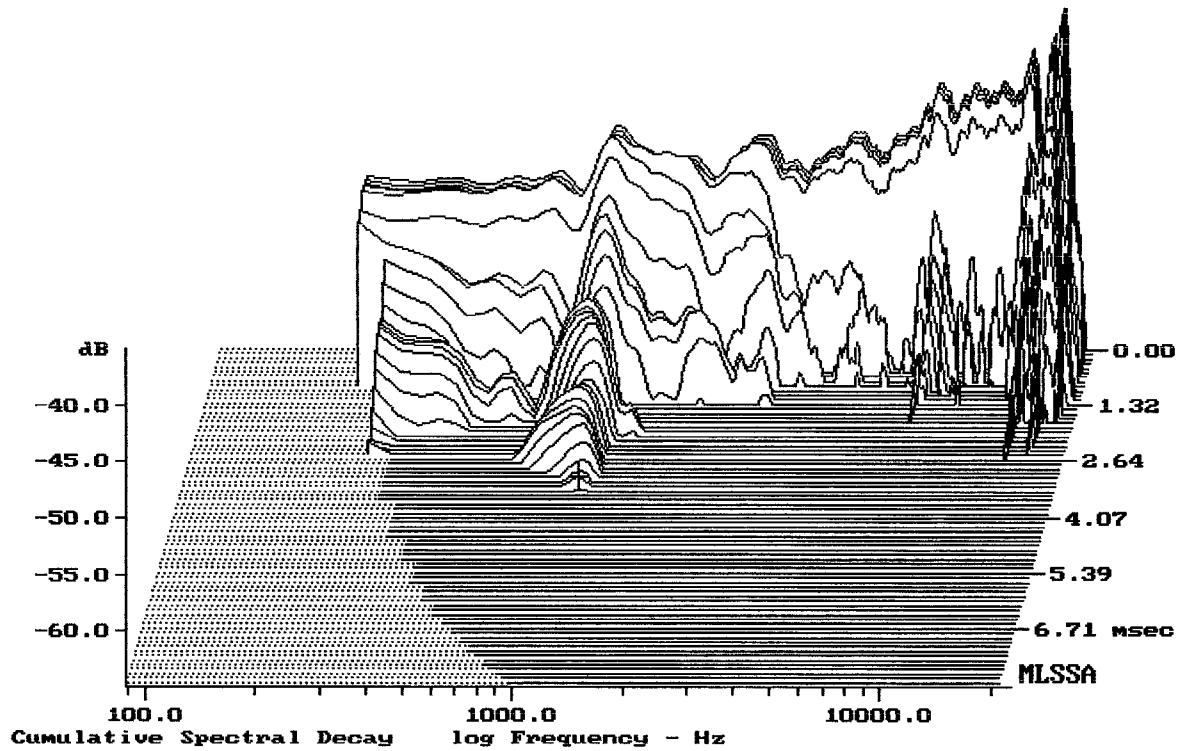


-64.13 dB, 1065 Hz (24), 3.300 msec (31)

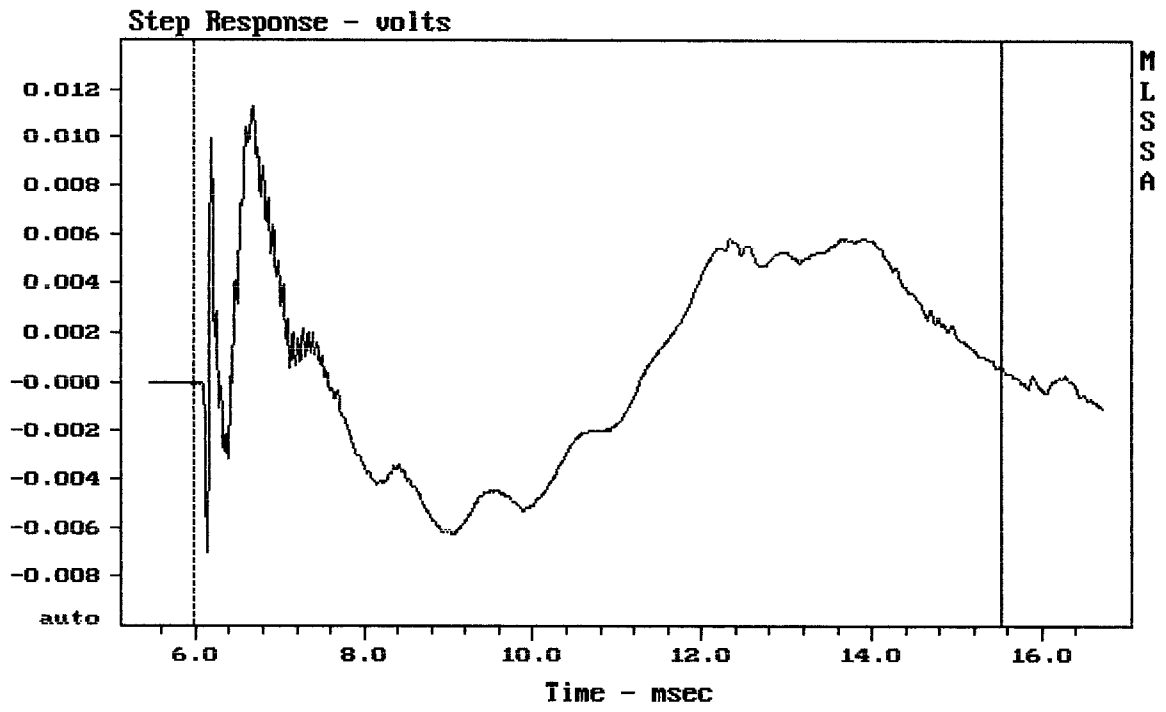

mean: 0.000802, rms: 0.004279, std: 0.004203, max: 0.0113, min: -0.007015

ART715-A MK II


MLSSA: Time Domain

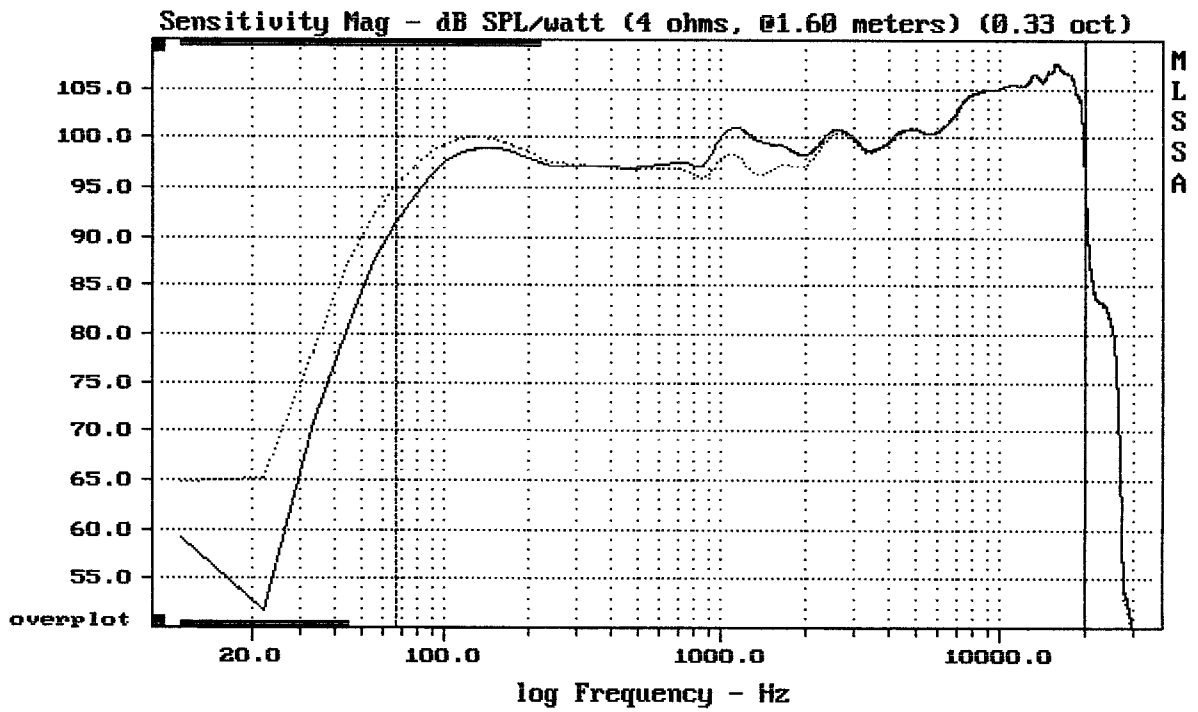

Overlay Compare: dev= +3.8/-3.3, std= 0.6, avg= -0.14


ART715-A MK II

MLSSA: Frequency Domain

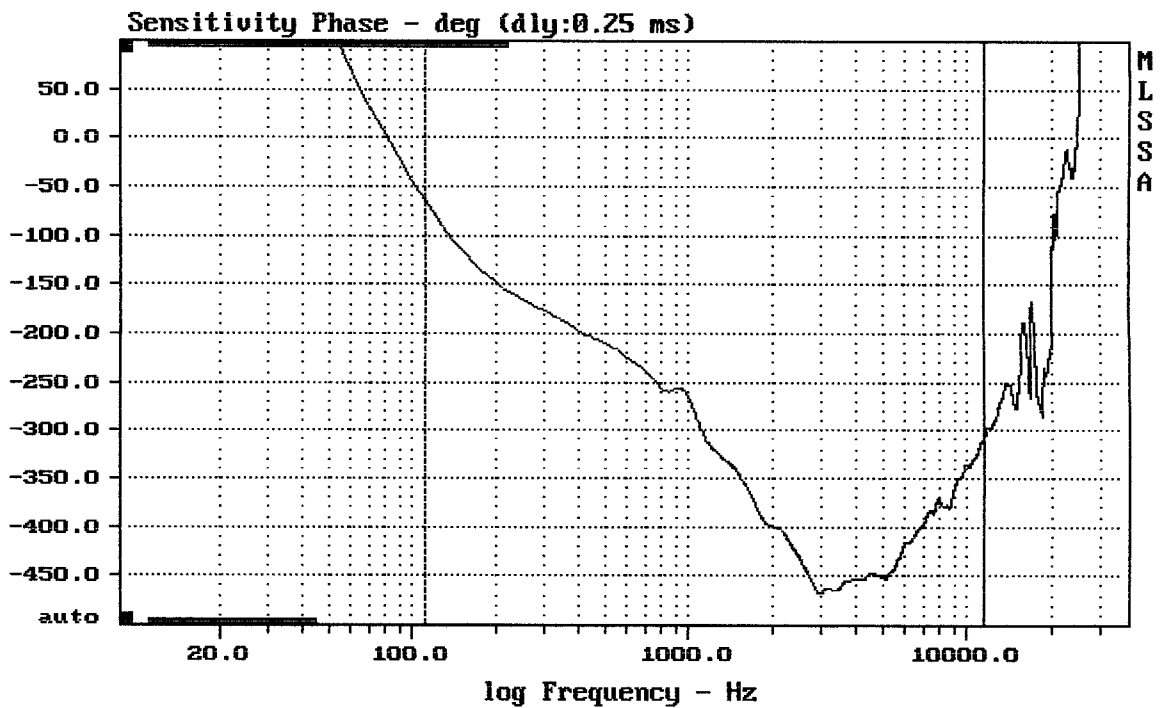


mean: -379.3, rms: 385.6, std: 69.56, max: -64.18, min: -467.7

ART715-A MK II

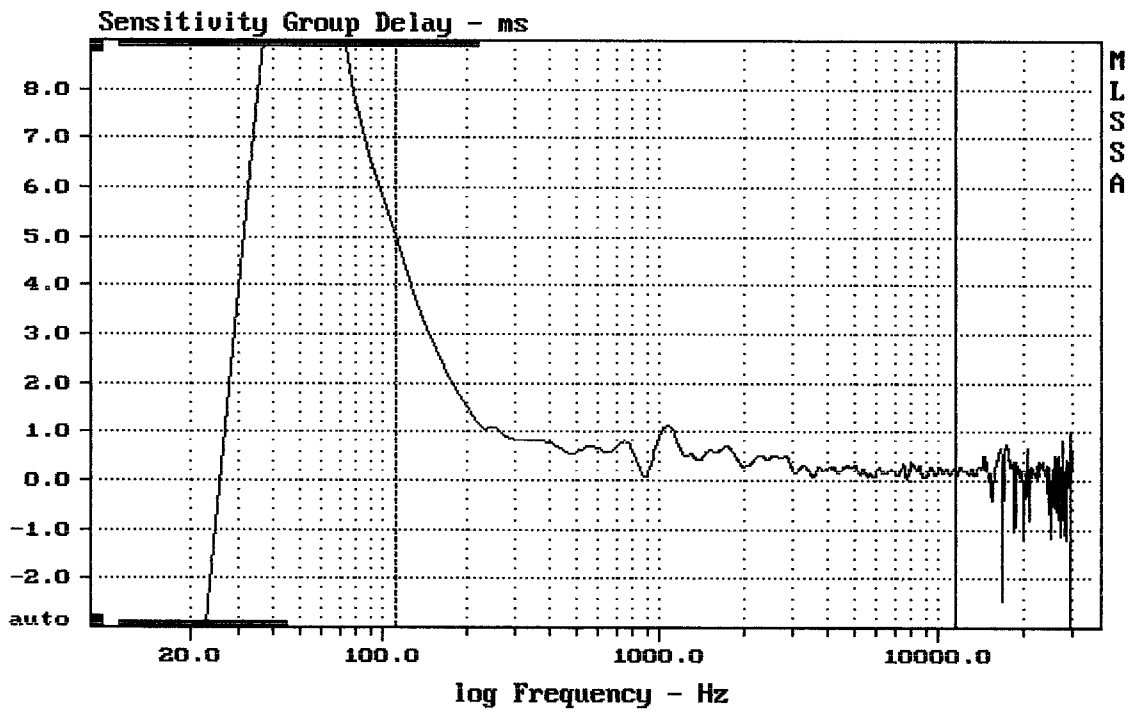


ART715-A MK II

MLSSA: Frequency Domain

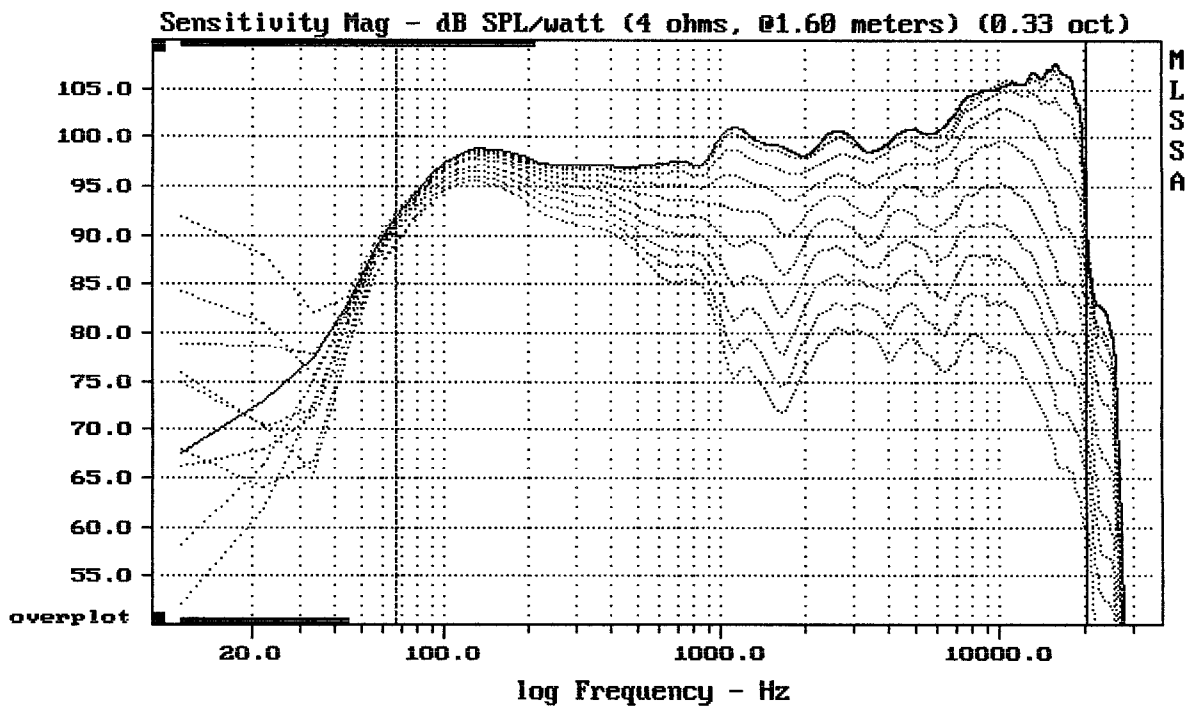


ART715-A MK II

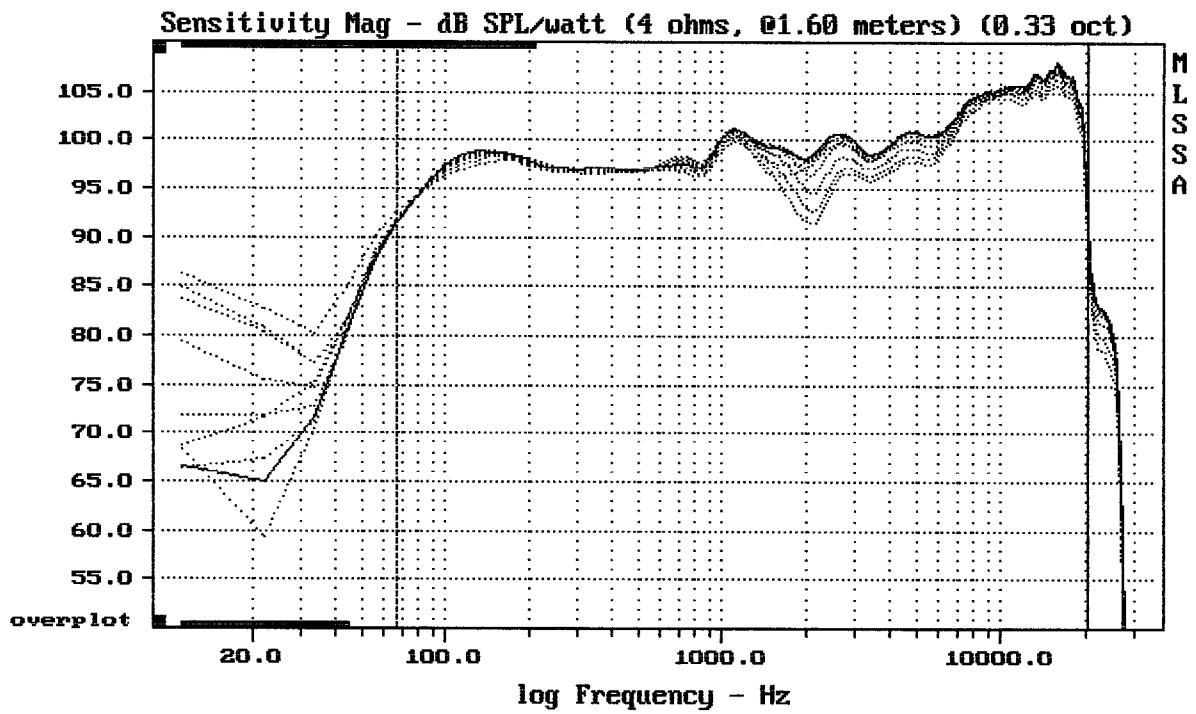

Overlay Compare: dev= +3.2/-5.2, std= 1.2, avg= -2


ART715-A MK II

MLSSA: Frequency Domain

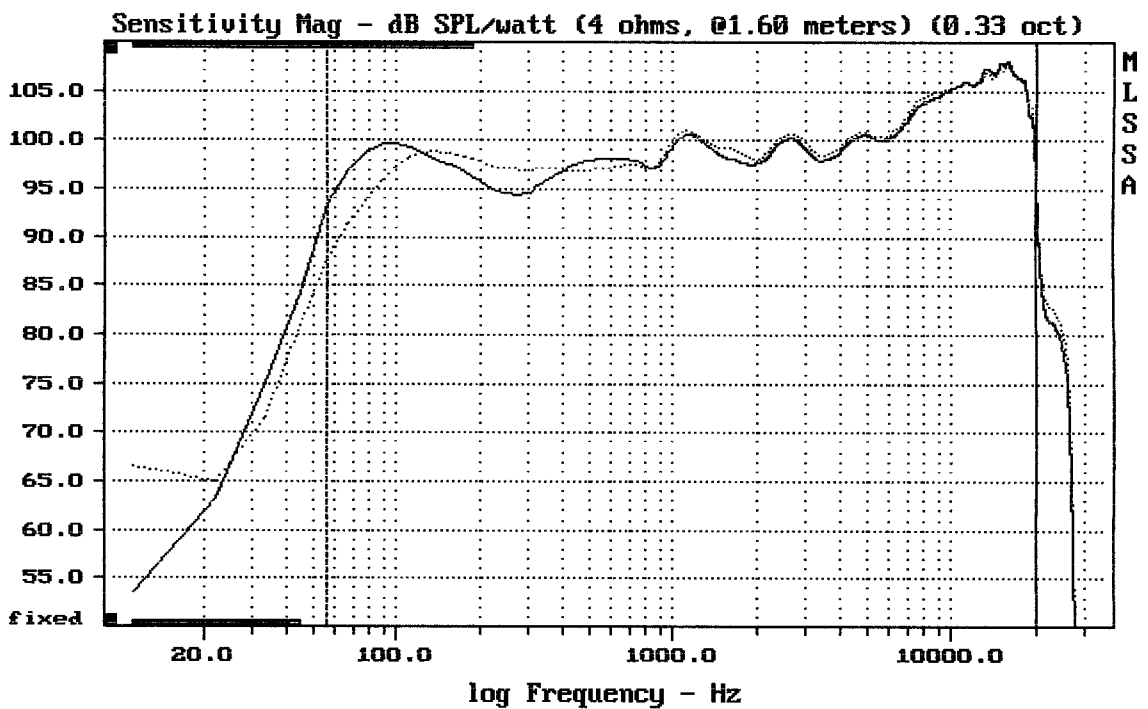

Overlay Compare: dev= +5.8/-2.4, std= 0.53, avg= -0.18


DTTO/FLOOR/---

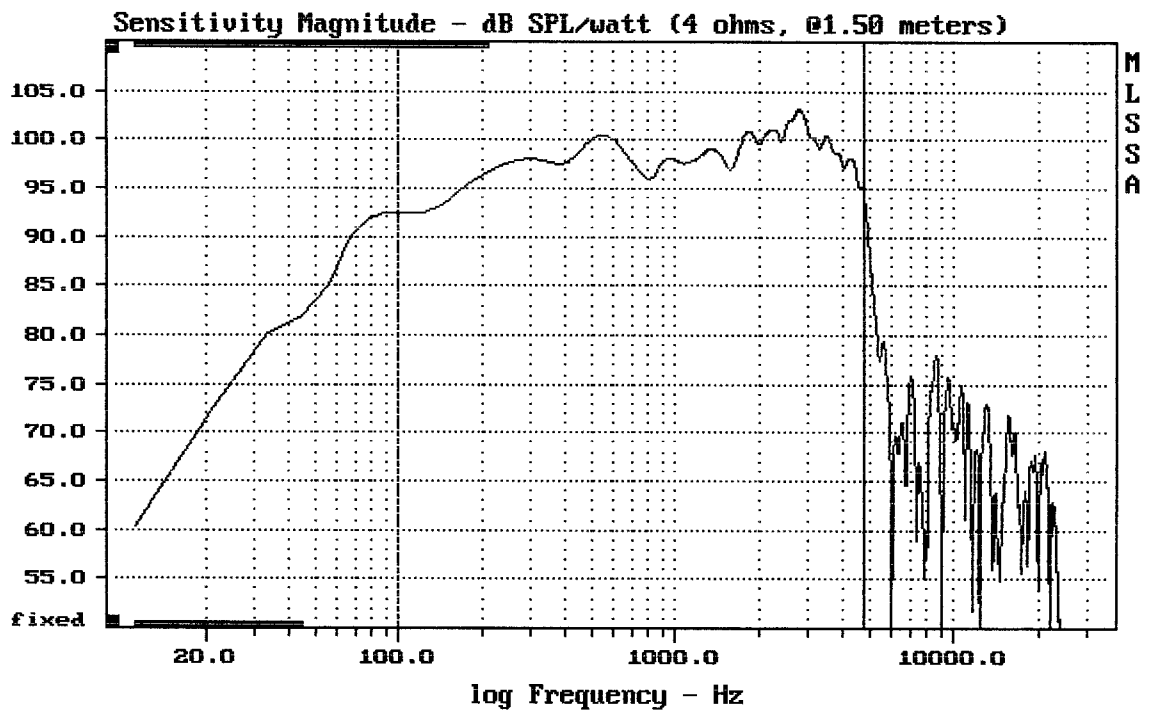

Level (100:4805 Hz) = 98.37 dB SPL/watt (4 ohms, @1.50 meters)

ART715-A MK II

MLSSA: Frequency Domain

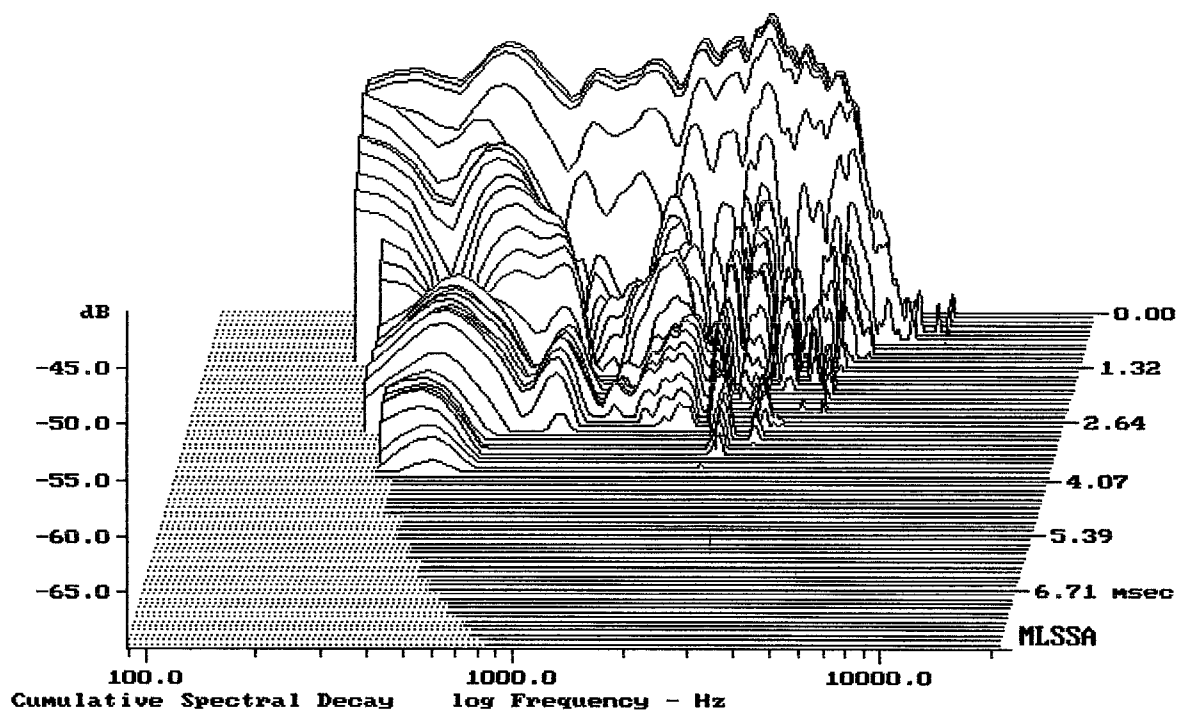

-68.43 dB, 2530 Hz (57), 3.410 msec (32)


MLSSA SPO 4.0D #960903-3057-3075 for
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.49	Ohms
2	Fs	44.07	Hz
3	Re	3.69	Ohms[dc]
4	Res	96.52	Ohms
5	Qms	10.25	
6	Qes	0.39	
7	Qts	0.38	
8	L1	0.09	mH
9	L2	0.95	mH
10	R2	8.65	Ohms
11	RMSE-load	0.33	Ohms
12	Vas(Sd)	211.22	liters
13	Mms	63.44	grams
14	Cms	206	$\mu\text{M}/\text{Newton}$
15	B1	12.86	Tesla-M
16	SPLref(Sd)	98.5	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams) Area (Sd): 855.30 sq cm
 DCR mode: Measure (-0.07 ohms) QC file: CLOSED
 Analysis successful. Shift in Fs = -33.5% (-20% to -50% is recommended).

15" FROM ART715-A MK II

MLSSA: Parameters

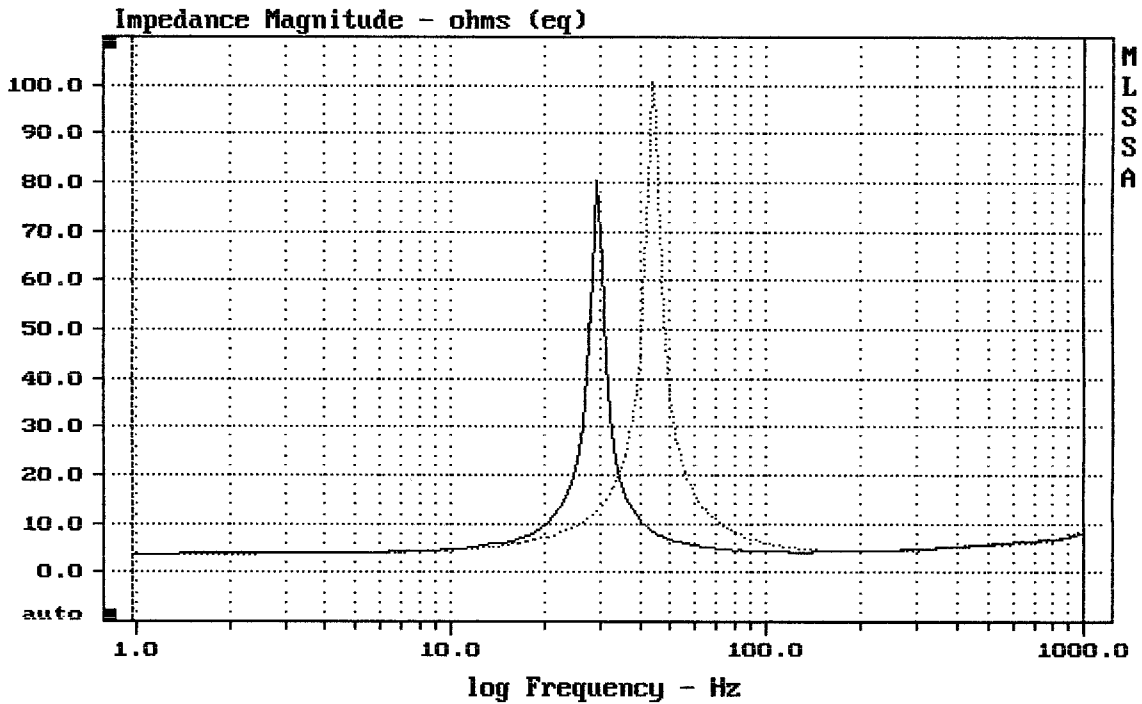

mean: 6.944, rms: 9.938, std: 7.108, max: 100.6, min: 3.762

MLSSA: Frequency Domain