



E-shop: <http://eshop.prodance.cz/cx10g251-8-ohm/d-97097/>

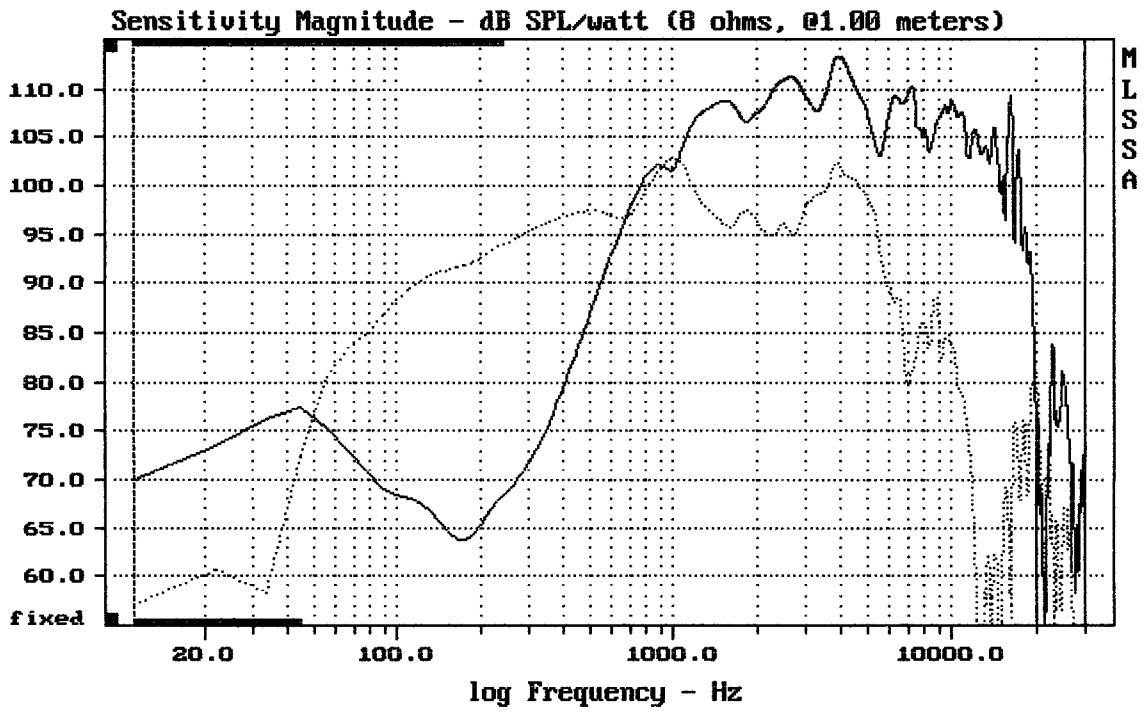

CURSOR: $dy = -26.6119$ $x = 30007.1014$ (2704)


CX10G251

MLSSA: Frequency Domain

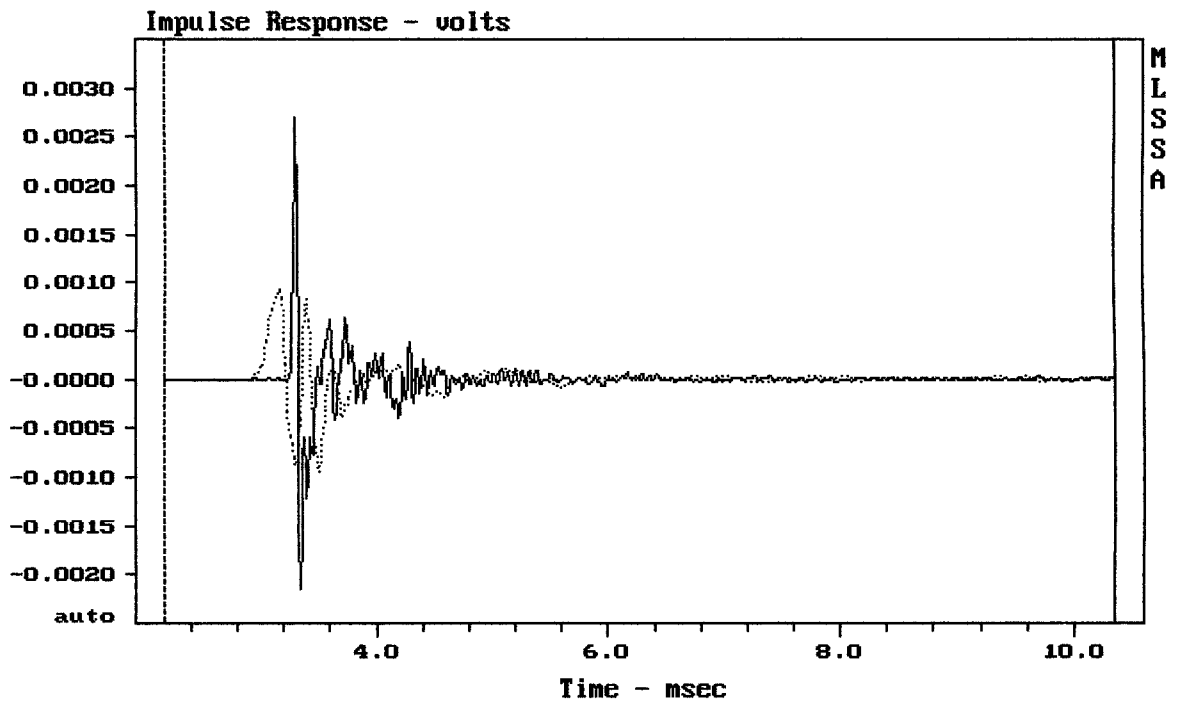

CURSOR: $dy = 1.53715e-005$ $x = 10.3510$ (941)


CX10G251

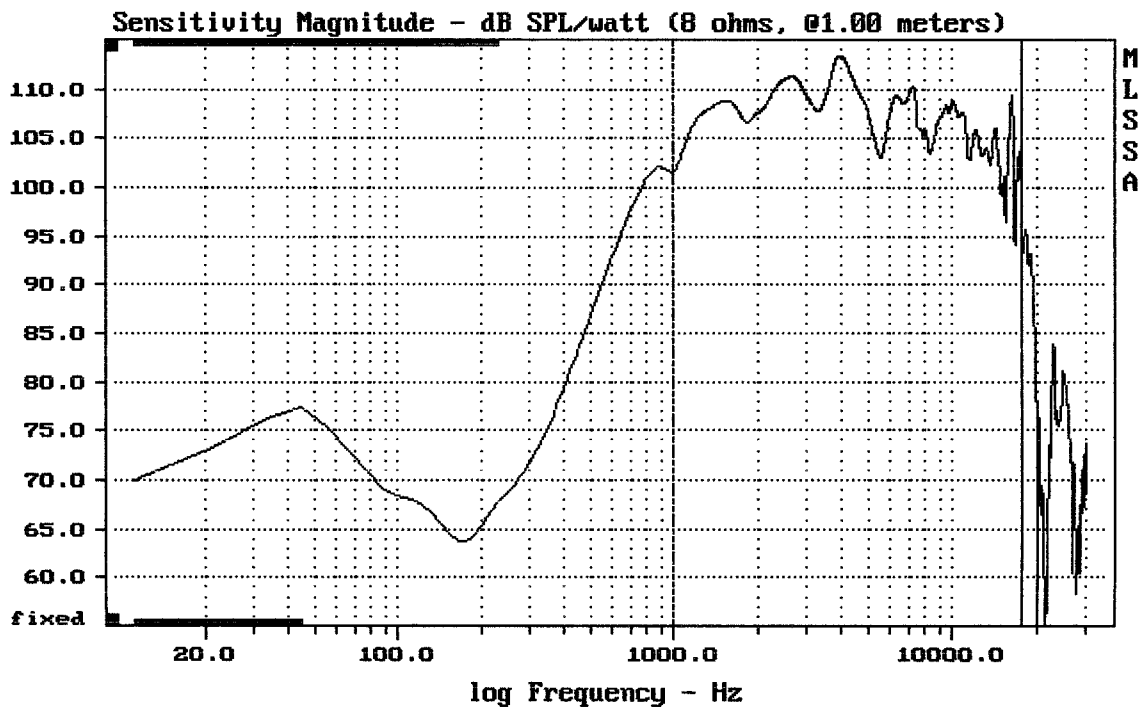


Level (999:17600 Hz) = 108.27 dB SPL/watt (8 ohms, @1.00 meters)

CX10G251

MLSSA: Frequency Domain

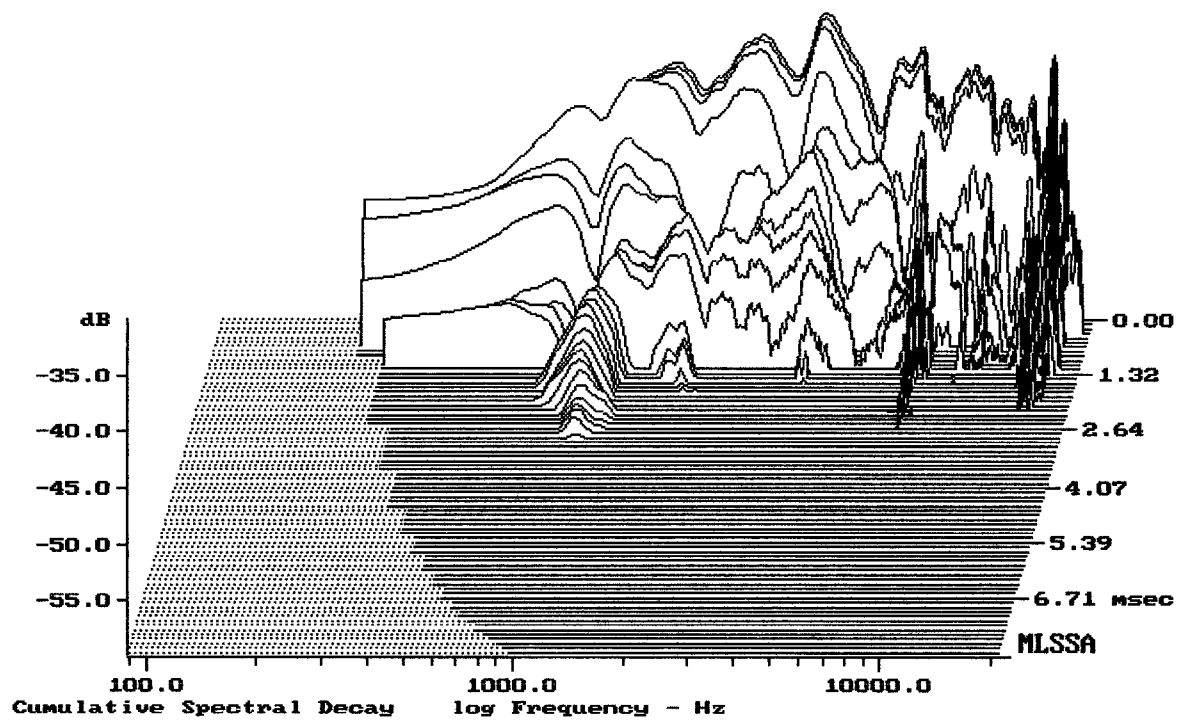


-58.89 dB, 7457 Hz (168), 2.530 msec (24)

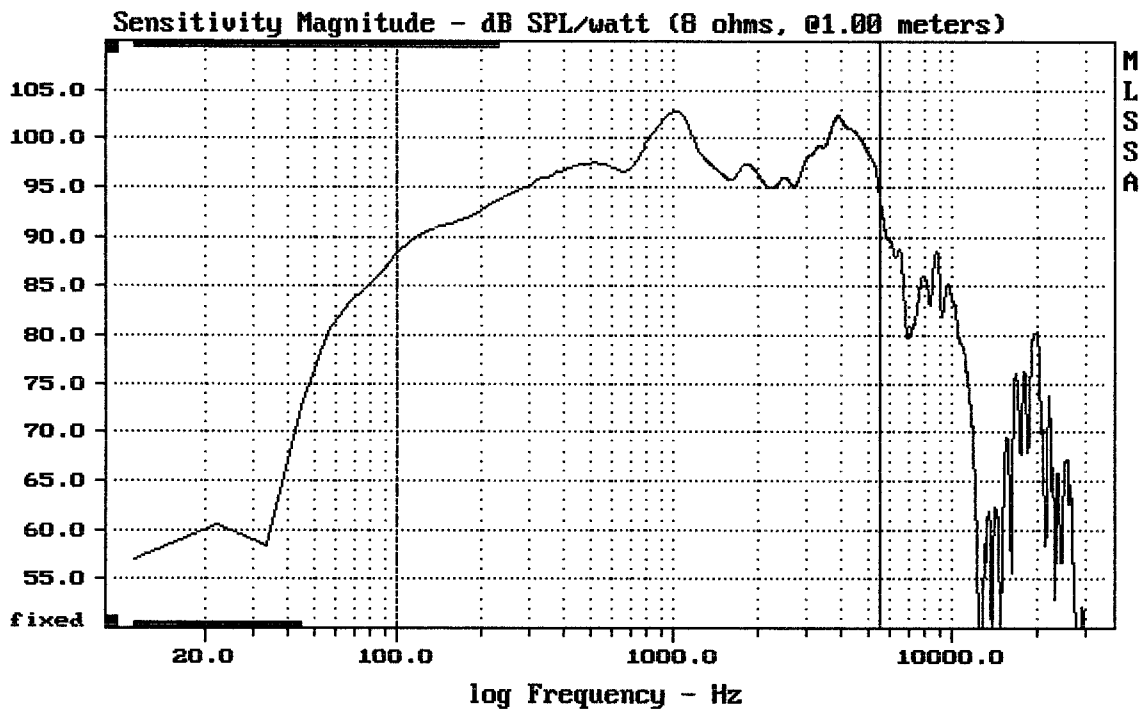

Level (100:5504 Hz) = 97.53 dB SPL/watt (8 ohms, @1.00 meters)

CX10G251

MLSSA: Frequency Domain

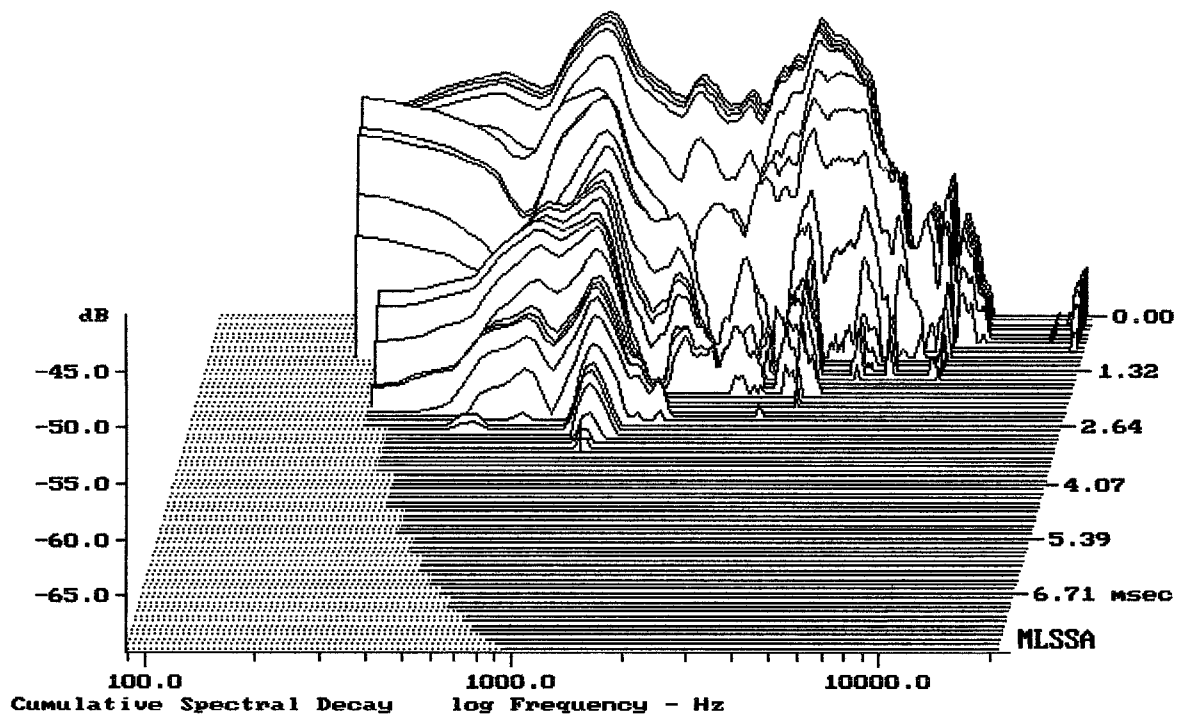

-69.17 dB, 1065 Hz (24), 3.190 msec (30)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.32	Ohms
2	Fs	100.15	Hz
3	Re	5.22	Ohms[dc]
4	Res	70.29	Ohms
5	Qms	5.67	
6	Qes	0.42	
7	Qts	0.39	
8	L1	0.40	mH
9	L2	0.89	mH
10	R2	4.67	Ohms
11	RMSE-load	1.39	Ohms
12	Vas(Sd)	21.49	liters
13	Mms	20.22	grams
14	Cms	125	$\mu\text{M}/\text{Newton}$
15	B1	12.55	Tesla-M
16	SPLref(Sd)	98.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 350.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -39.0% (-20% to -50% is recommended).

CX10G251

MLSSA: Parameters

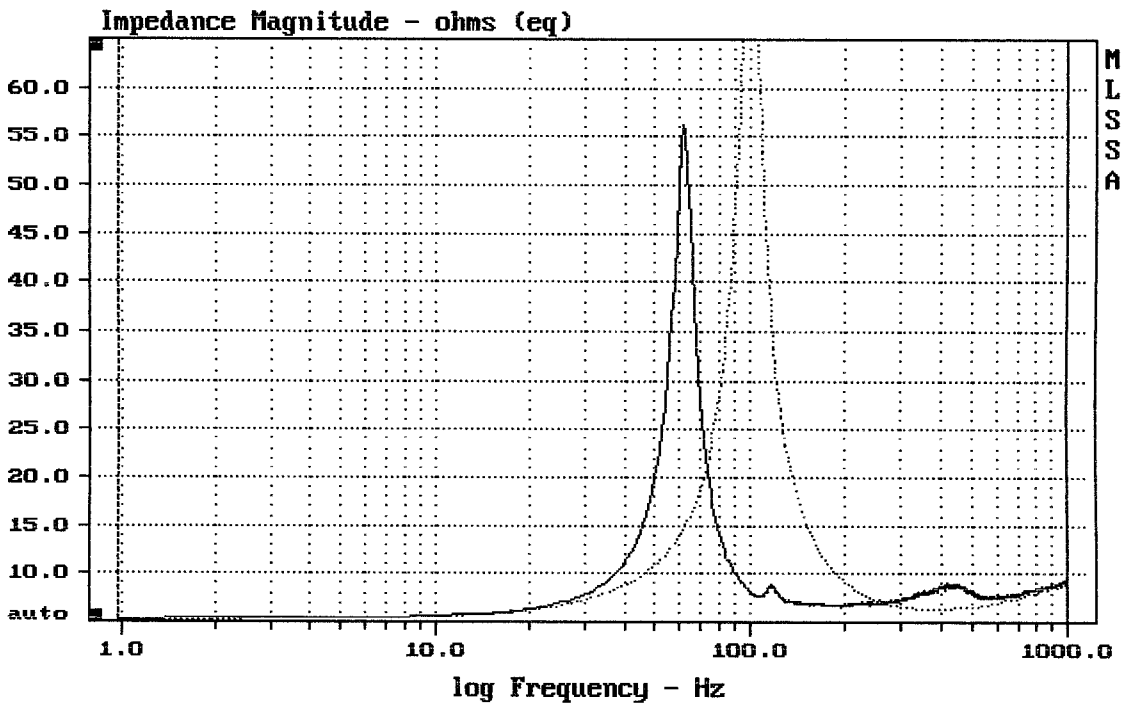

mean: 10.09, rms: 13.94, std: 9.62, max: 75.21, min: 5.282

MLSSA: Frequency Domain