



E-shop: <http://eshop.prodance.cz/ayra-ten-sub/d-96064/>

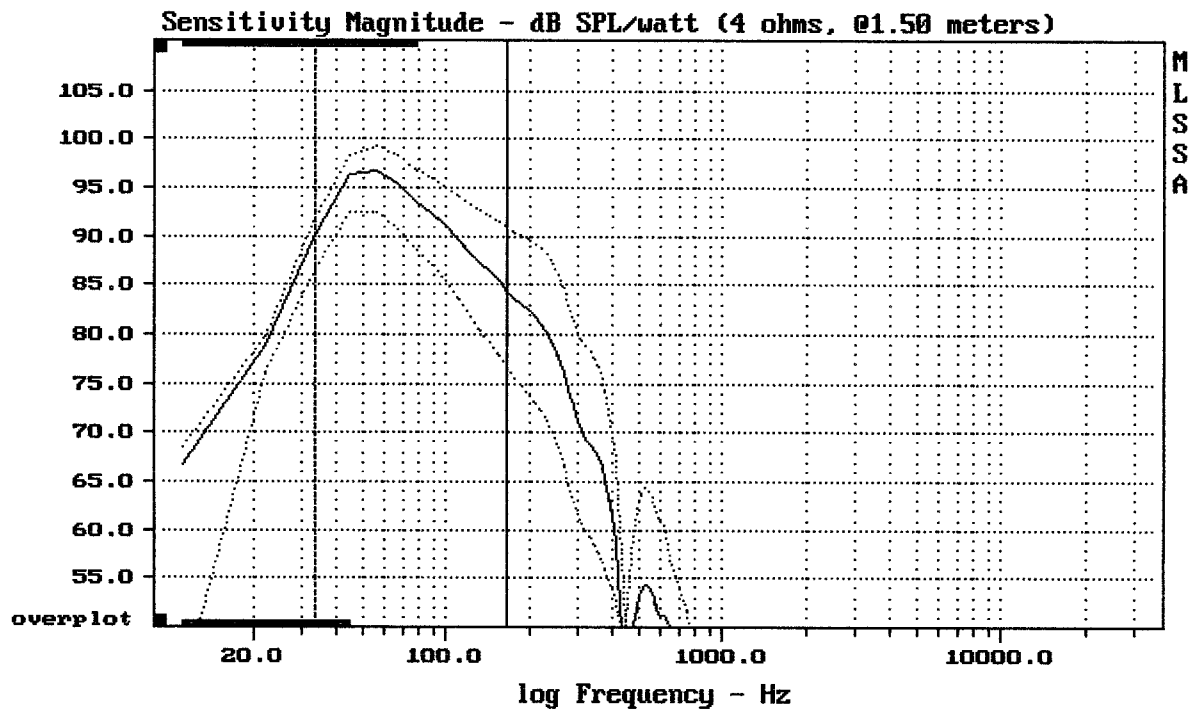

Overlay Compare: dev= +2.1/-2, std= 1.3, avg= -5.7


AYRA TEN SUB

MLSSA: Frequency Domain

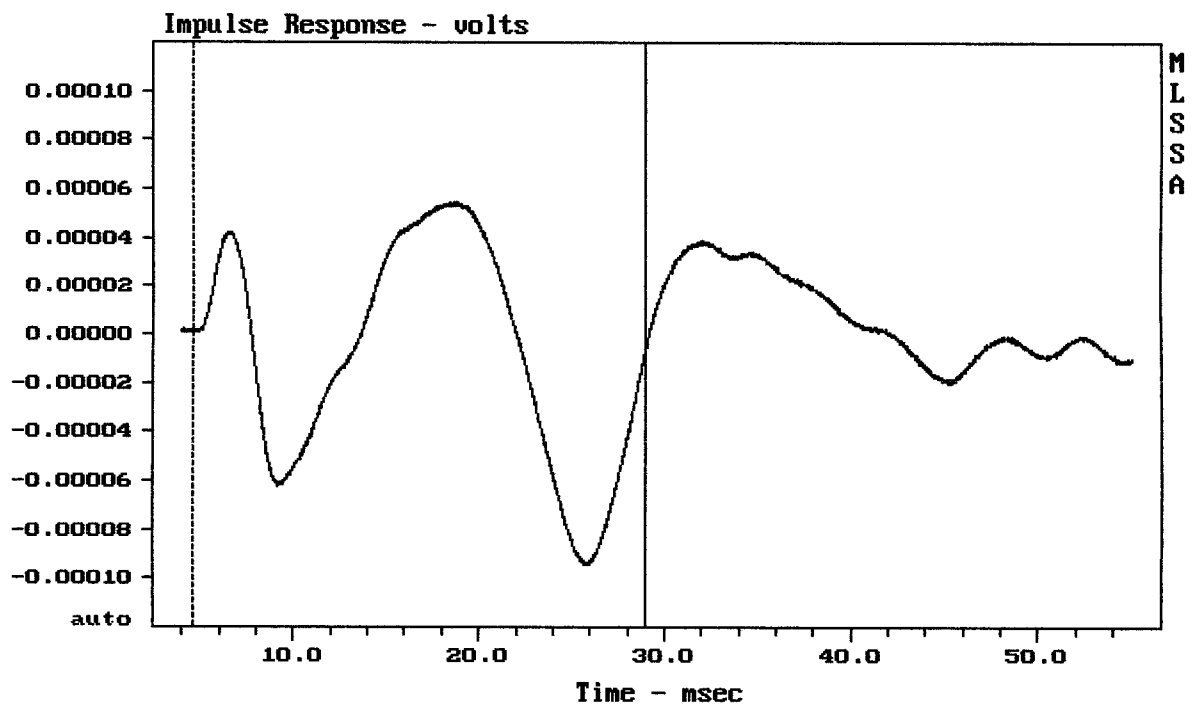

mean: -8.558e-006, rms: 4.636e-005, std: 4.556e-005, max: 5.459e-005, min: -9.


AYRA TEN SUB

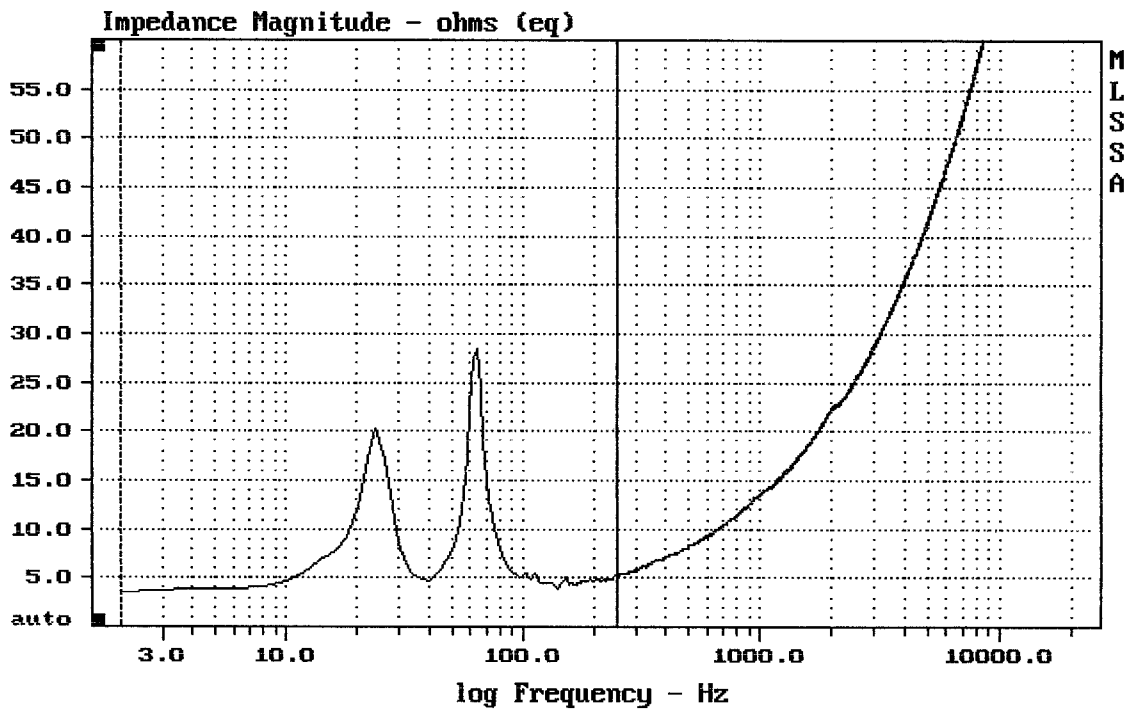


mean: 6.764, rms: 8.249, std: 4.723, max: 28.51, min: 3.598

AYRA TEN SUB

MLSSA: Frequency Domain

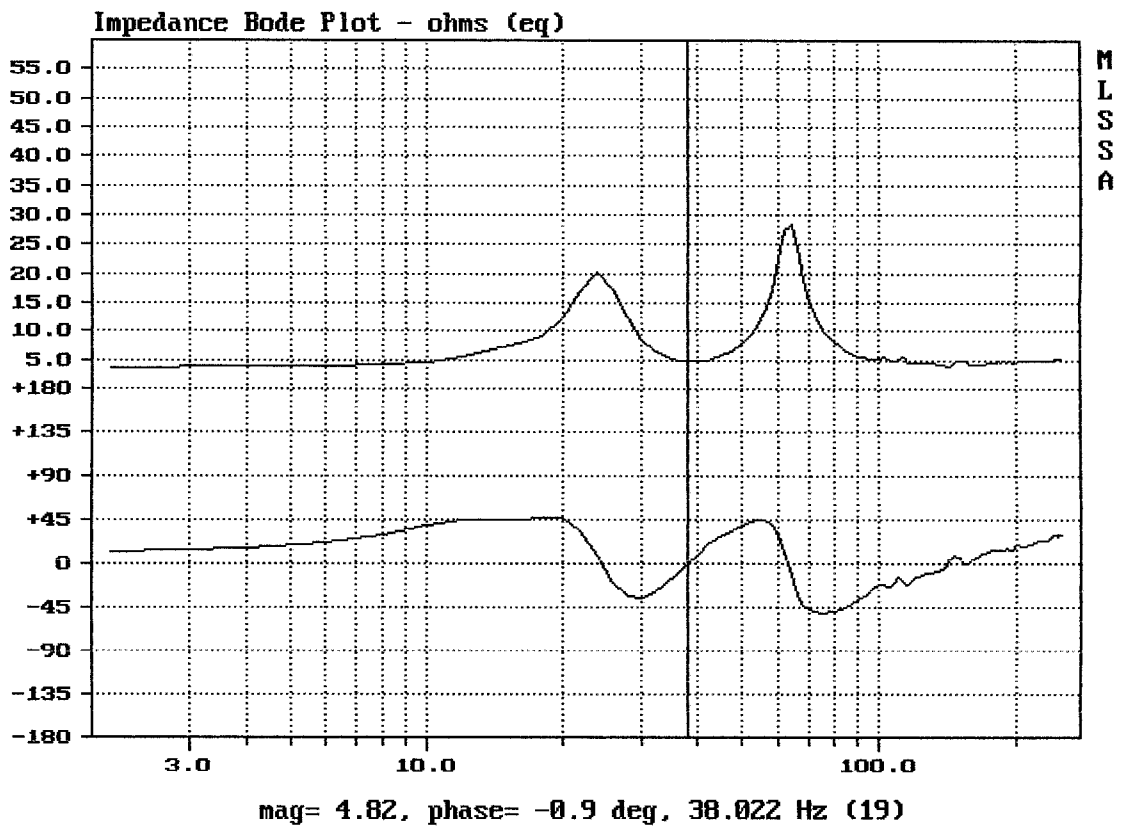

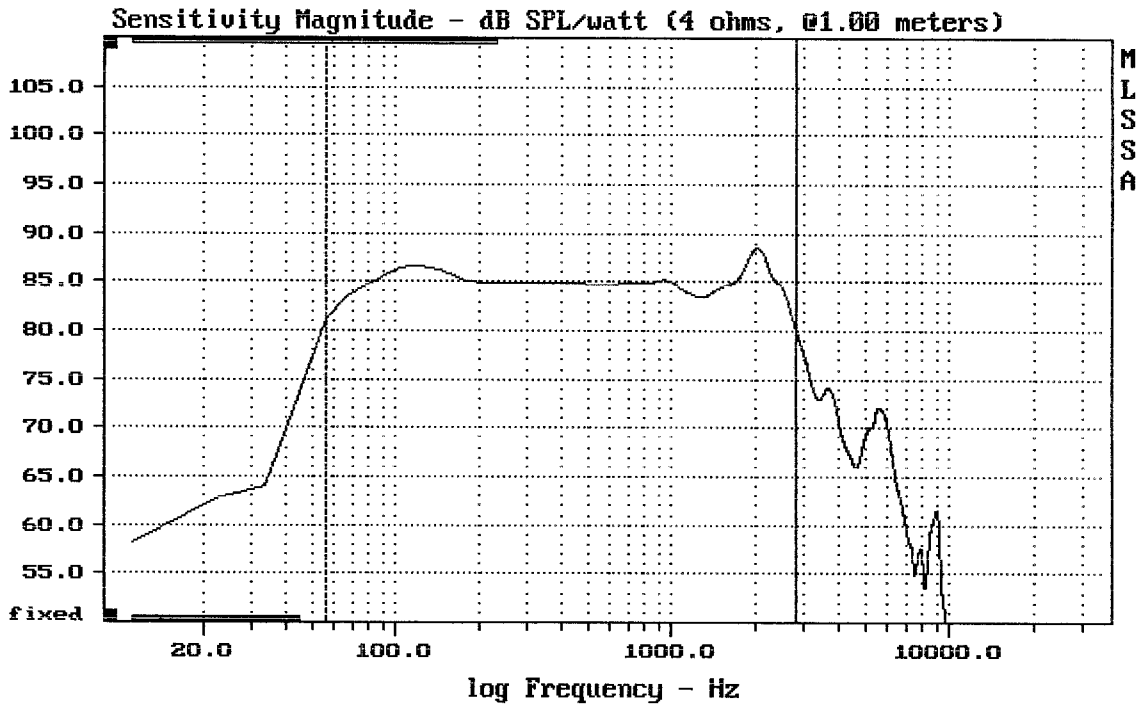


Level (55:2797 Hz) = 85.05 dB SPL/watt (4 ohms, @1.00 meters)

10" FROM AYRA TEN SUB

9-18-92 9:30 PM

MLSSA: Frequency Domain

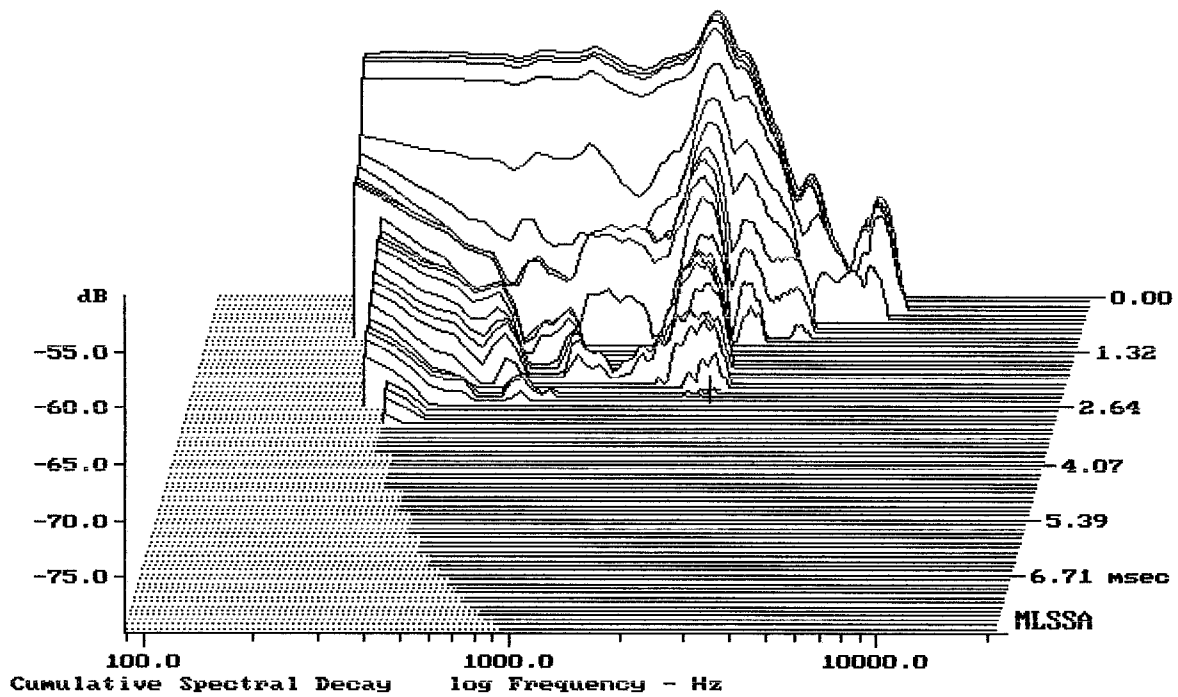

-79.79 dB, 2308 Hz (52), 2.310 msec (22)

## Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.41	Ohms
2	Fs	38.73	Hz
3	Re	3.25	Ohms[dc]
4	Res	55.73	Ohms
5	Qms	6.84	
6	Qes	0.40	
7	Qts	0.38	
8	L1	1.23	mH
9	L2	1.32	mH
10	R2	7.22	Ohms
11	RMSE-load	0.51	Ohms
12	Vas(Sd)	43.05	liters
13	Mms	66.08	grams
14	Cms	256	$\mu\text{M}/\text{Newton}$
15	Bl	11.45	Tesla-M
16	SPLref(Sd)	89.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.0% (-20% to -50% is recommended).

10" FROM AYRA TEN SUB

MLSSA: Parameters

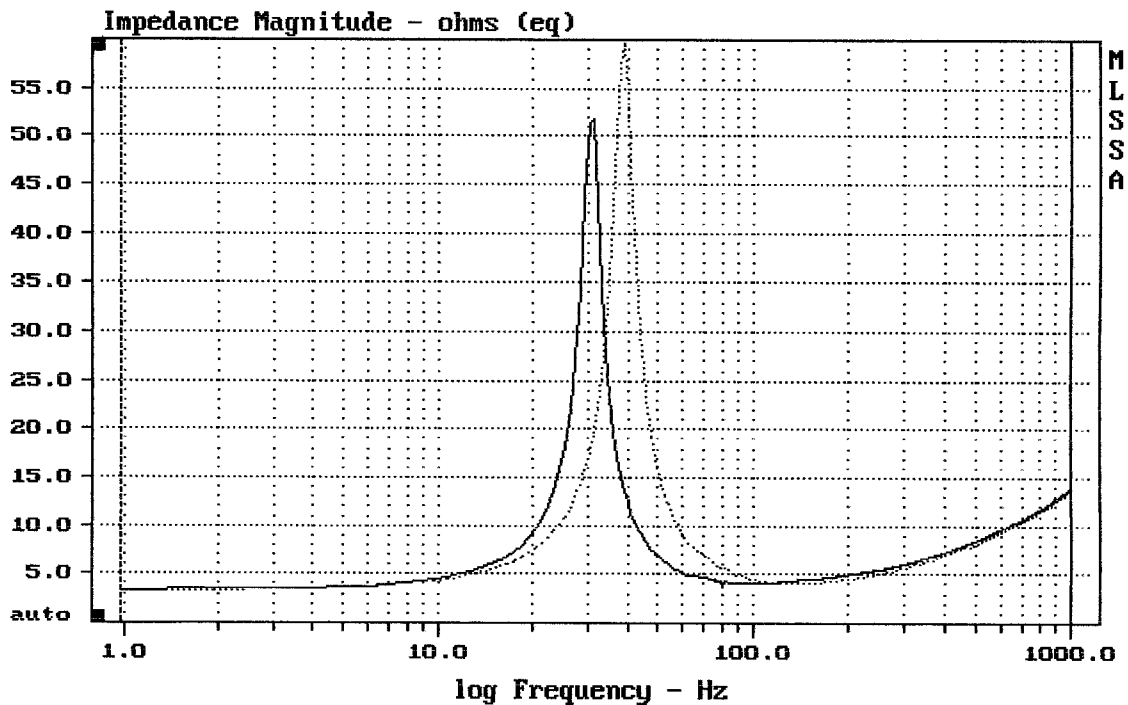


---

mean: 8.998, rms: 10.26, std: 4.938, max: 59.58, min: 3.25

---

MLSSA: Frequency Domain