


E-shop:


<http://eshop.prodance.cz/hda/d-94948/>

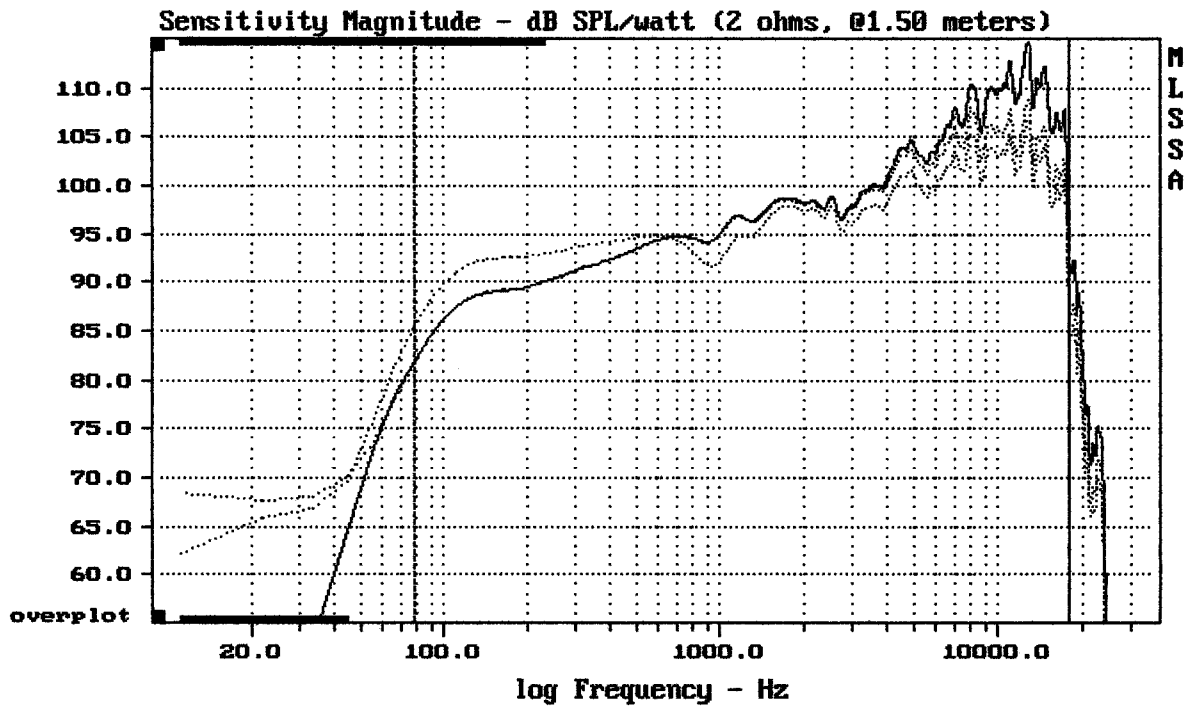

mean: 101.01, rms: 101.53, std: 2.67, max: 106.69, min: 85.43


MACKIE HDA

MLSSA: Frequency Domain

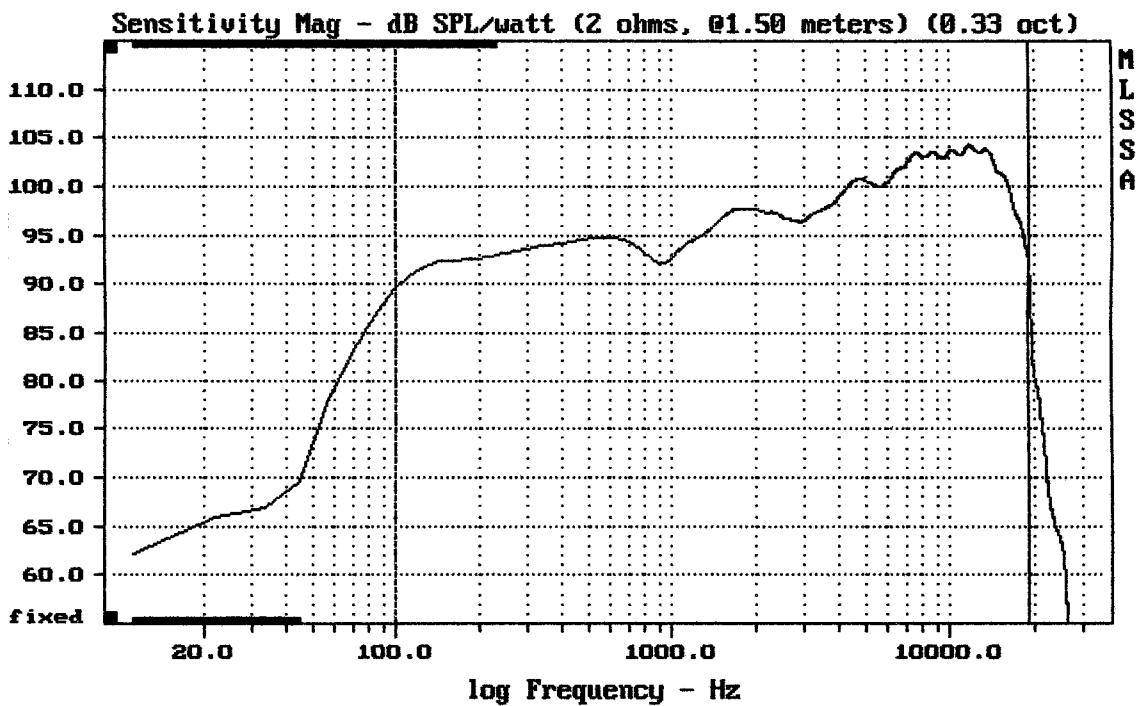


mean: 100.75, rms: 101.24, std: 2.58, max: 104.21, min: 89.71

MACKIE HDA

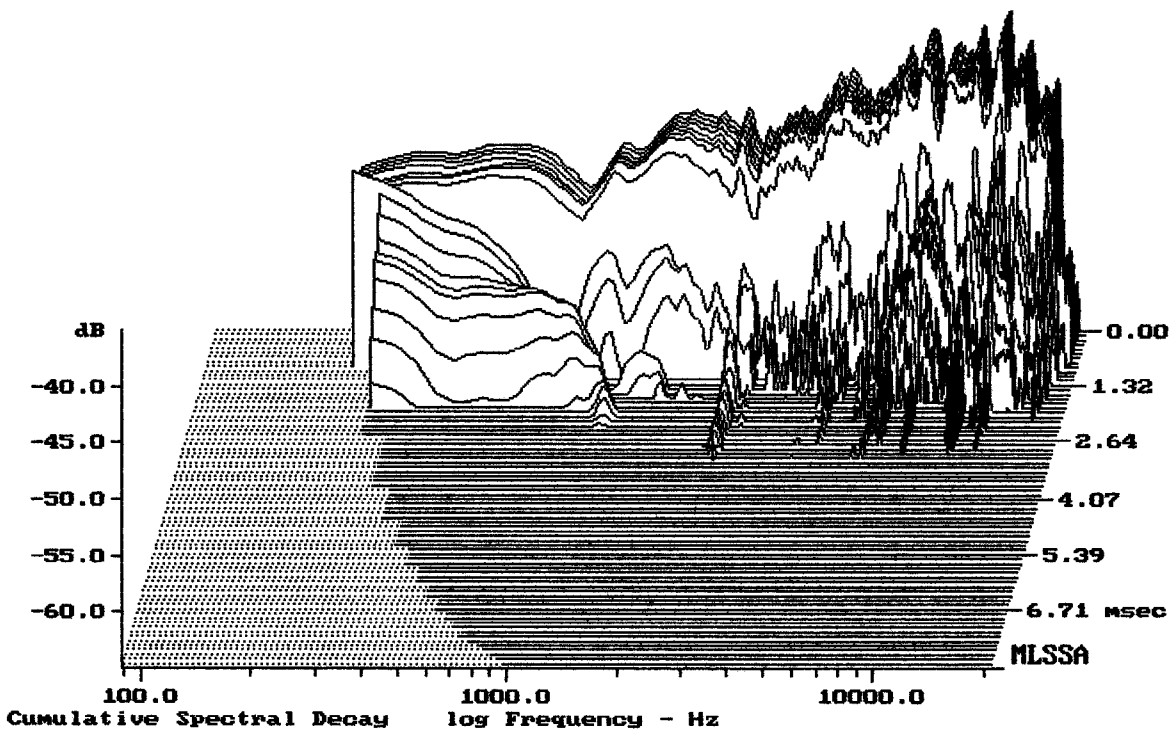


-64.35 dB, 2486 Hz (56), 2.970 msec (28)

DIT0

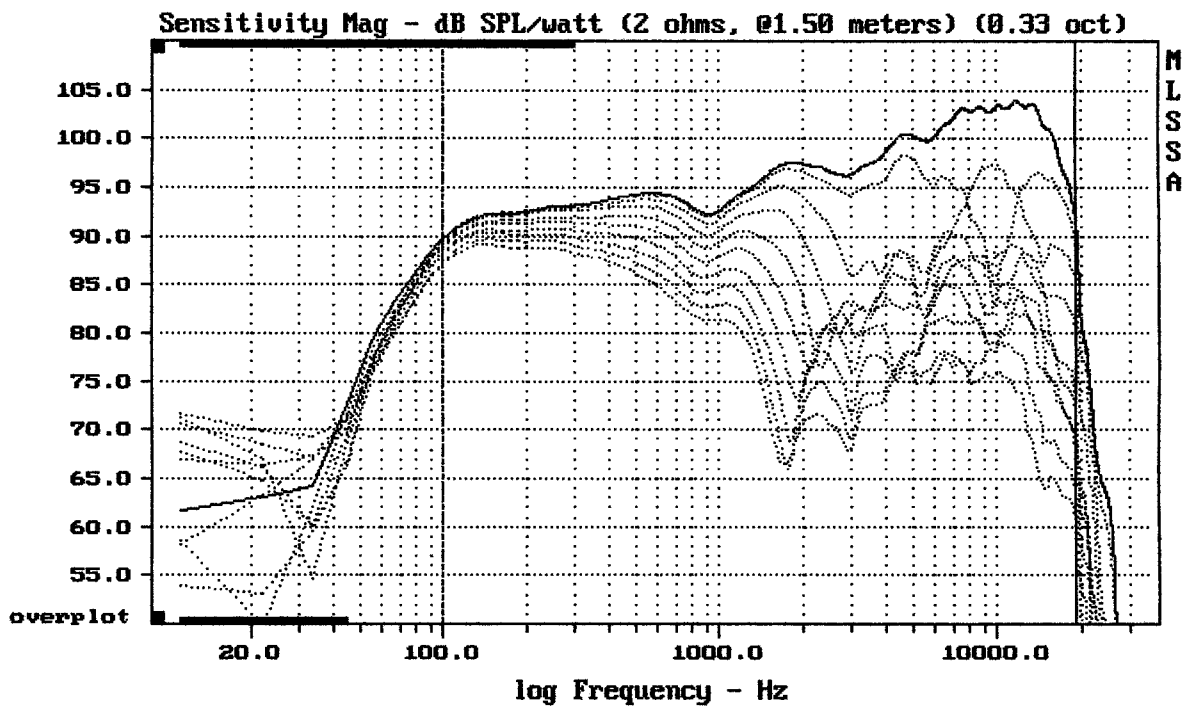

Overlay Compare: dev= +26/-9.1, std= 6.5, avg= -28


MACKIE HDA

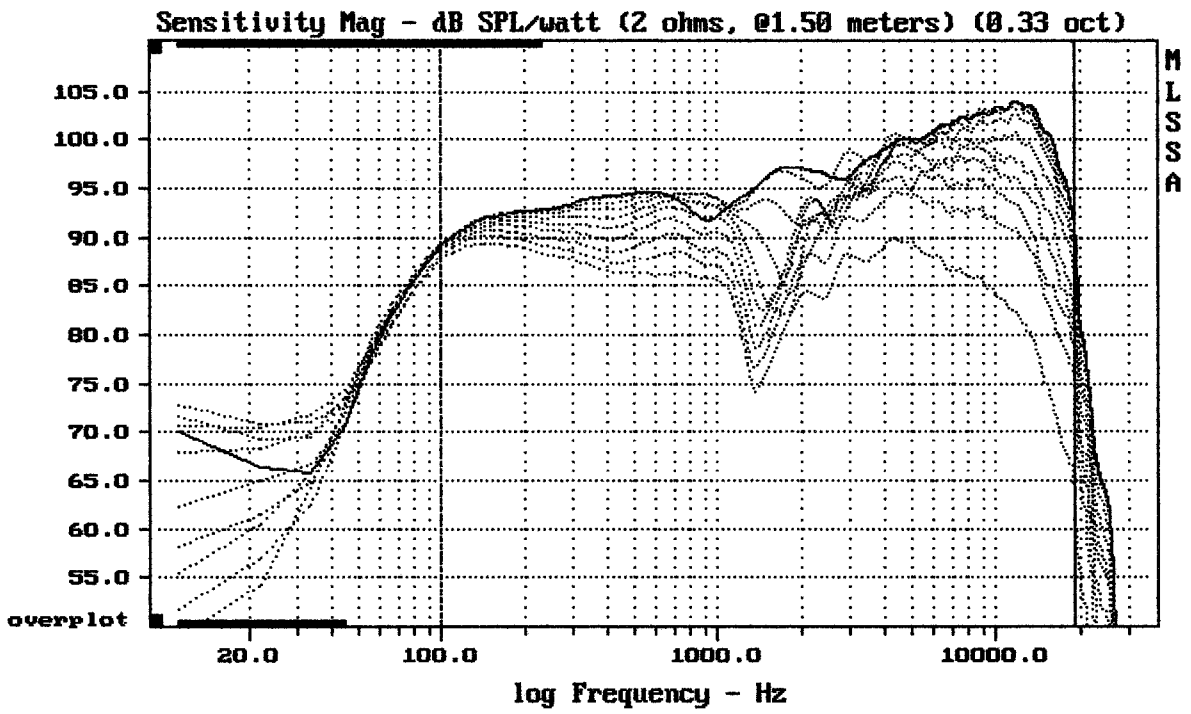

Overlay Compare: dev= +17/-12, std= 6.7, avg= -19


MACKIE HDA

MLSSA: Frequency Domain

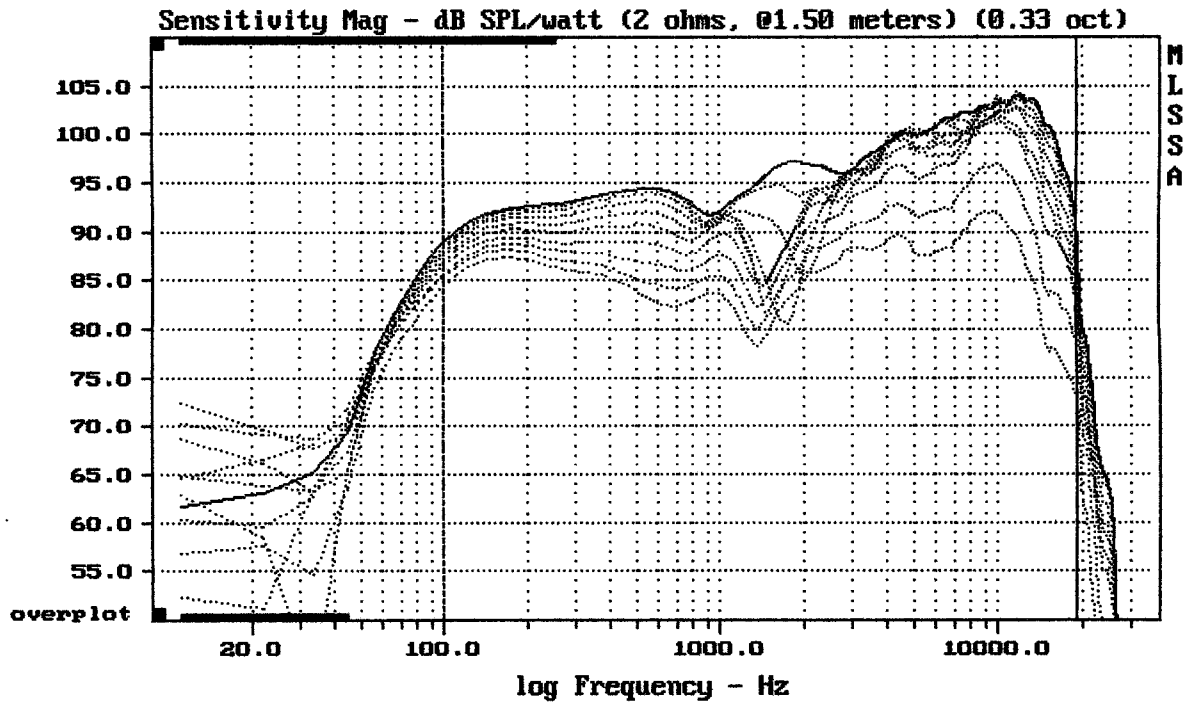

Overlay Compare: dev= +10/-8.5, std= 4.5, avg= -15


MACKIE HDA

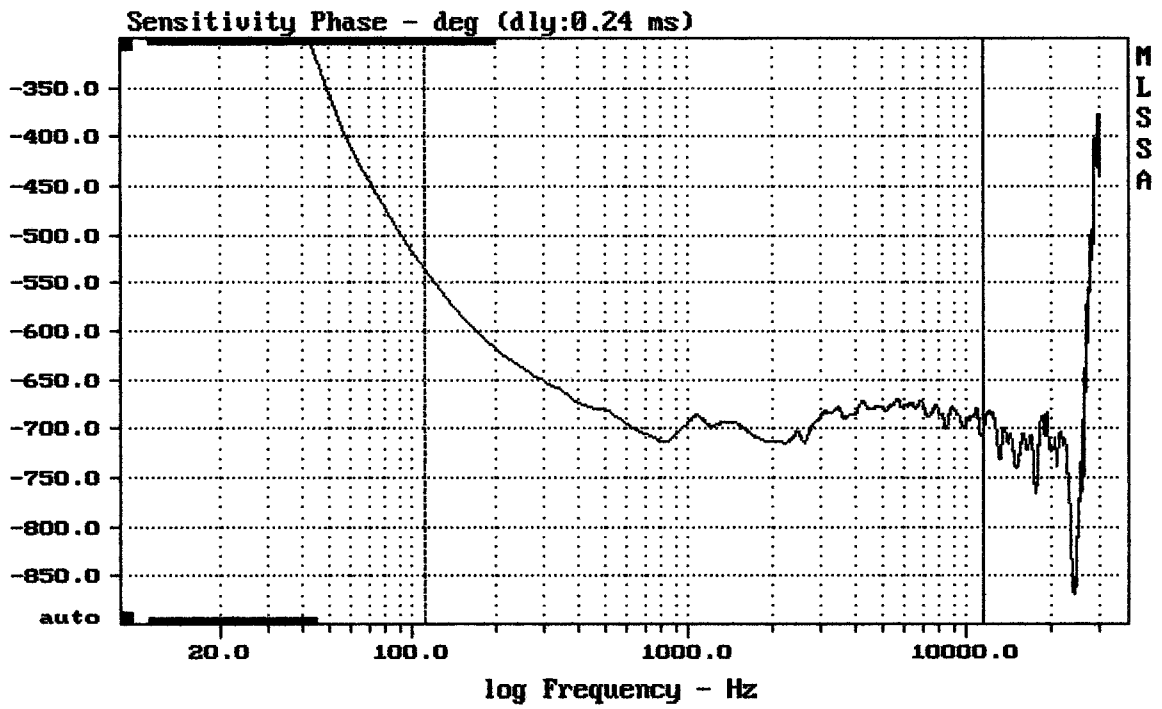

mean: -686.4, rms: 686.6, std: 15.97, max: -535.9, min: -714.8


MACKIE HDA

MLSSA: Frequency Domain

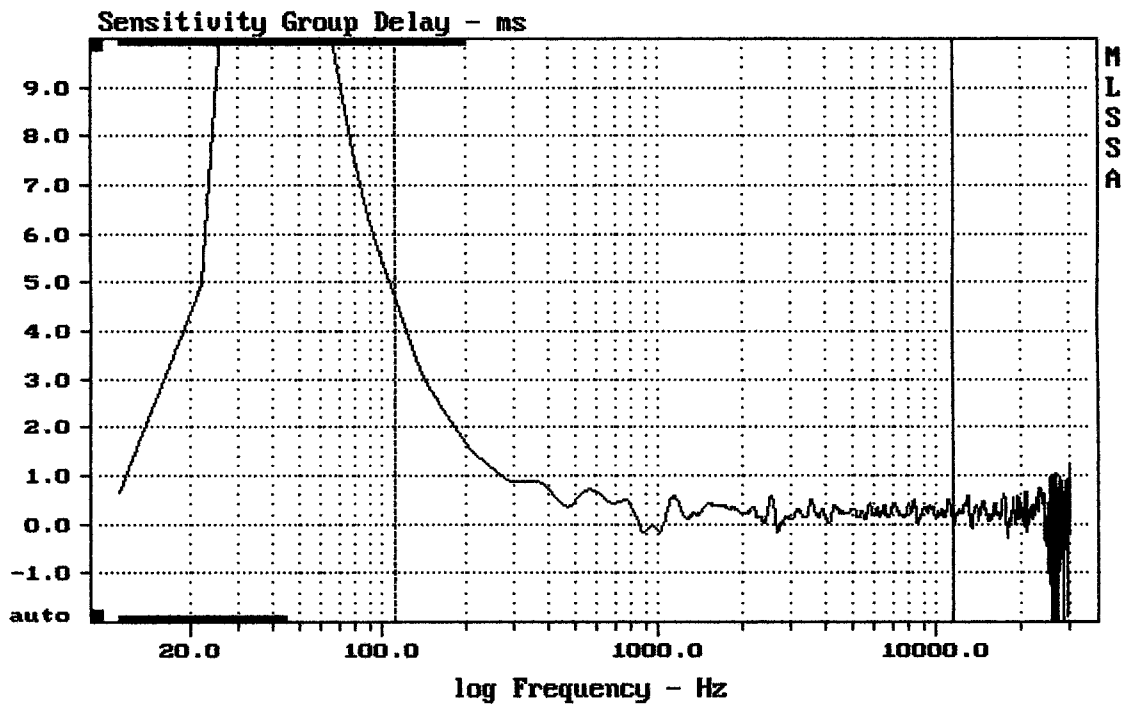

mean: 0.2855, rms: 0.4188, std: 0.3063, max: 4.694, min: -0.1622


MACKIE HDA

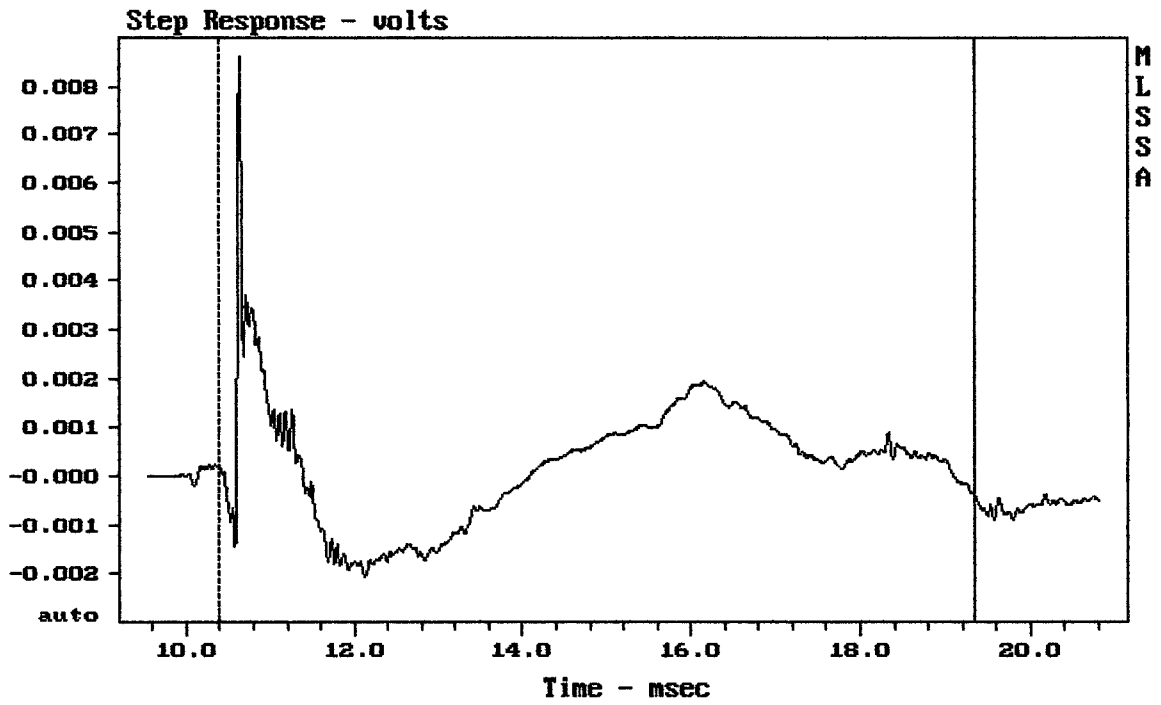

mean: 0.0002529, rms: 0.00127, std: 0.001245, max: 0.008626, min: -0.00206


MACKIE HDA

MLSSA: Time Domain

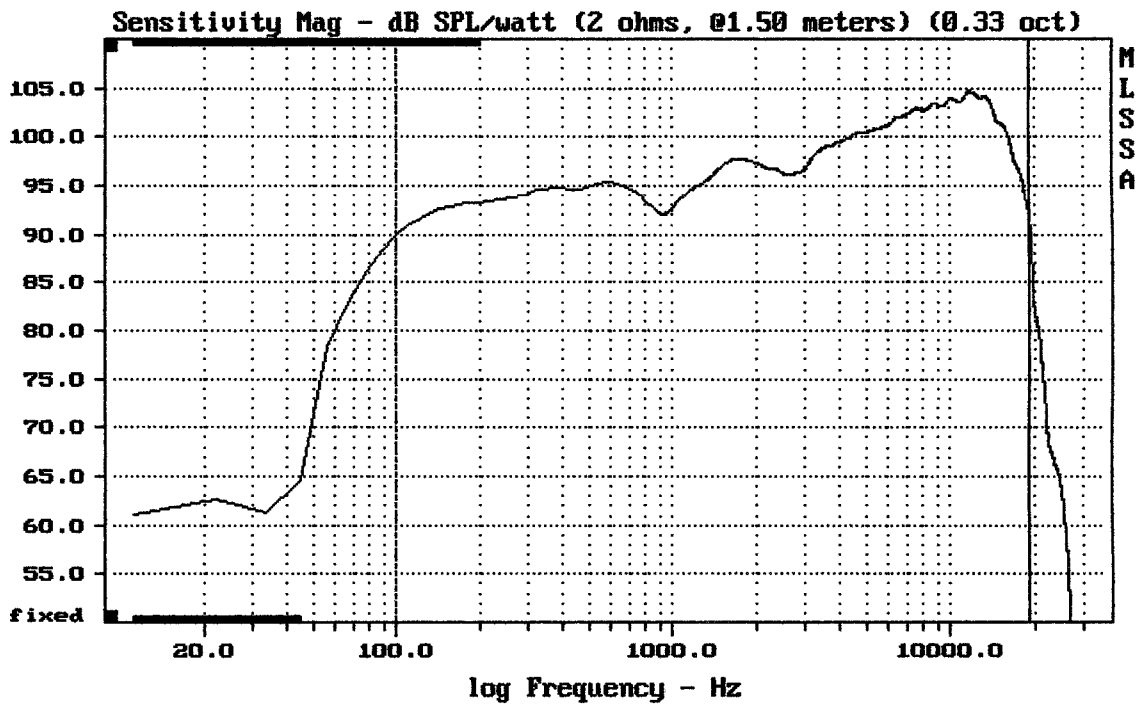

mean: 100.90, rms: 101.40, std: 2.60, max: 104.67, min: 89.98


MACKIE HDA

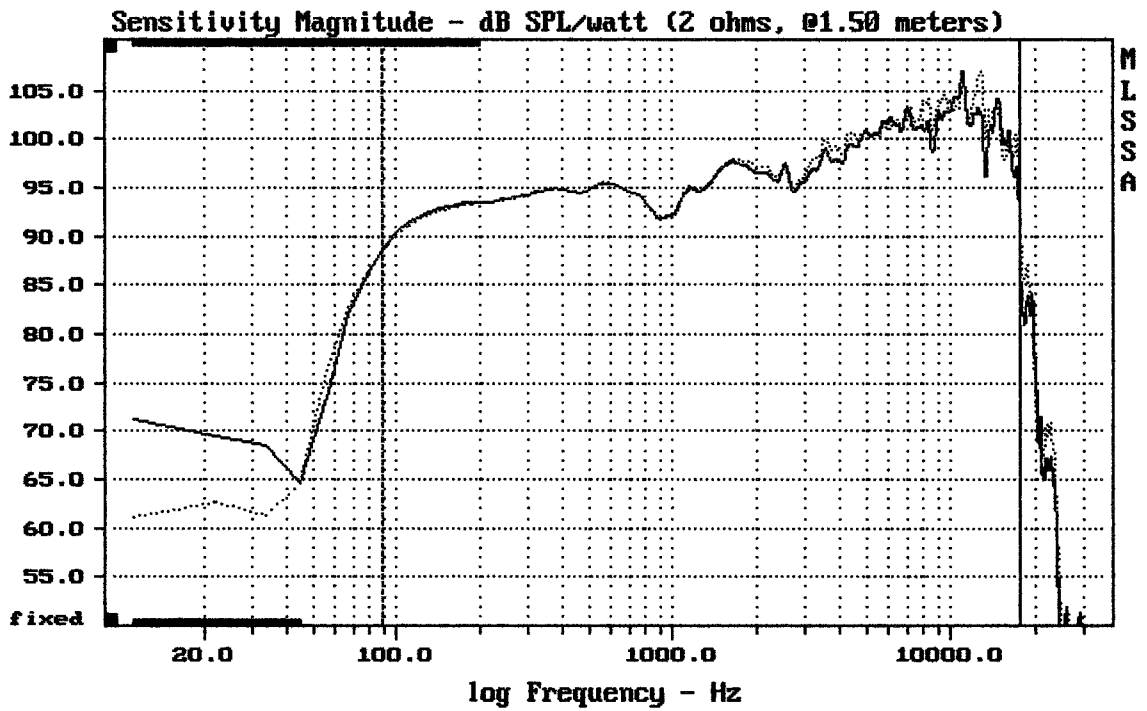


Overlay Compare: dev= +2.8/-3.6, std= 1.4, avg= -0.81

MACKIE HDA

MLSSA: Frequency Domain

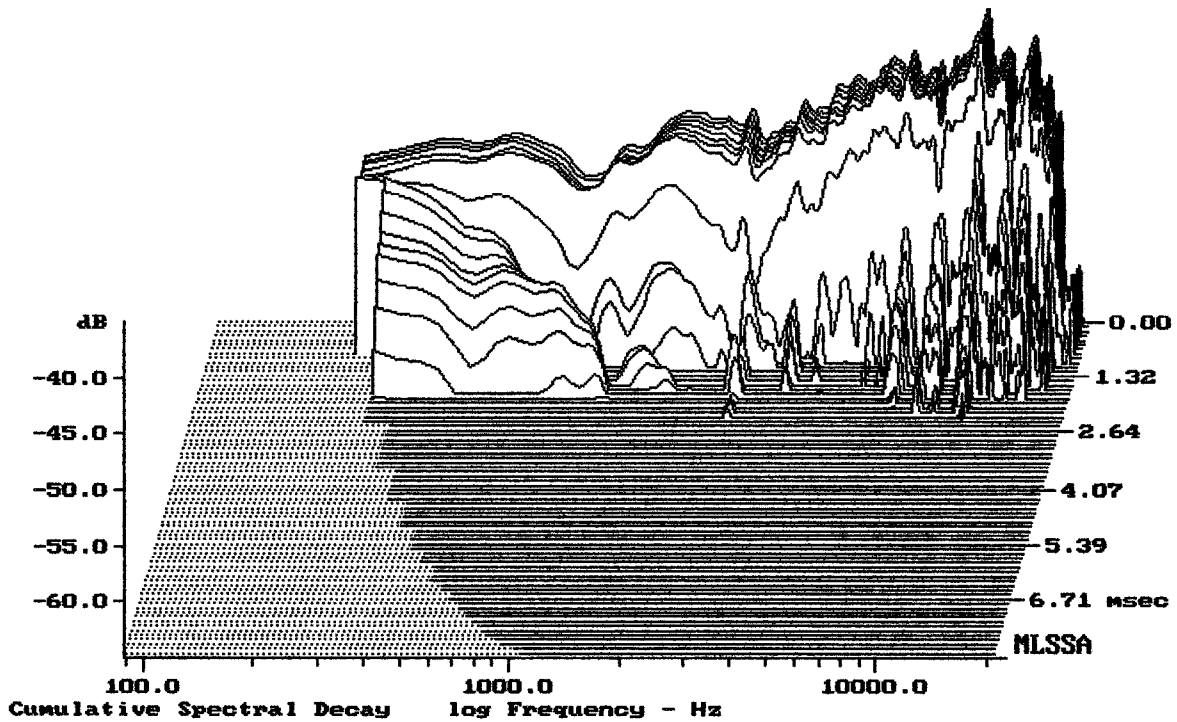

-64.14 dB, 11097 Hz (250), 2.310 msec (22)

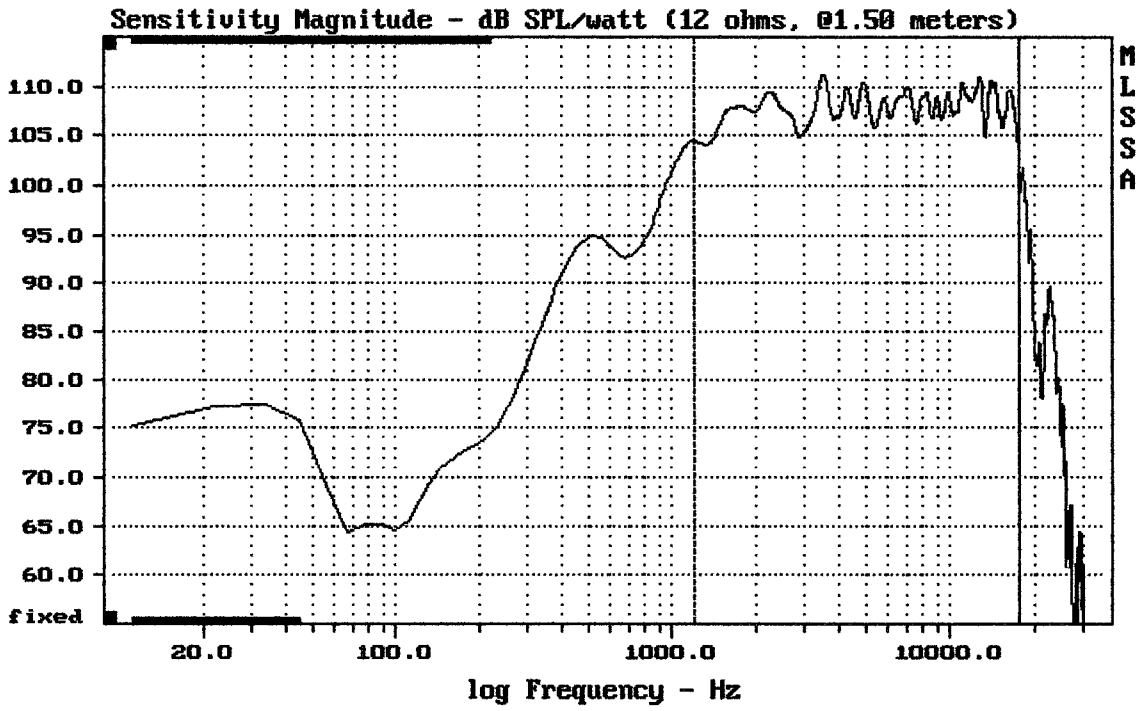


Level (1199:17600 Hz) = 108.04 dB SPL/watt (12 ohms, @1.50 meters)


MACKIE HDA

7-18-91 3:28 AM

MLSSA: Frequency Domain

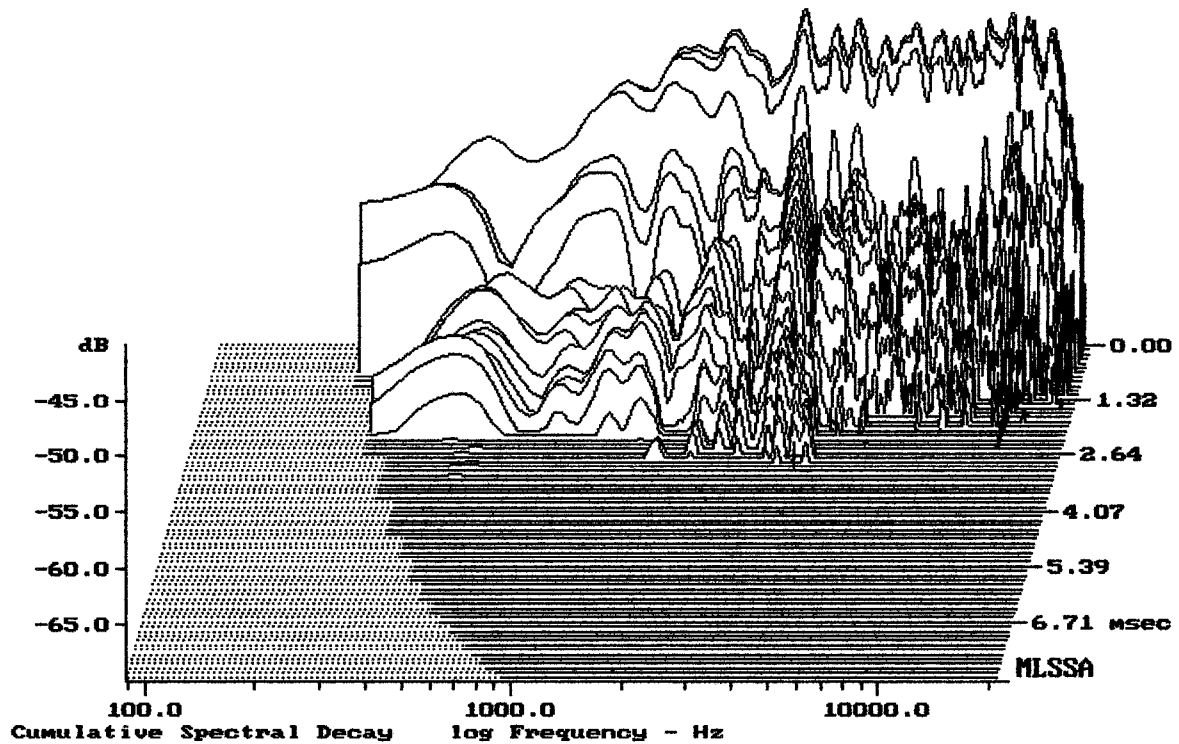


-69.44 dB, 3995 Hz (90), 2.860 msec (27)

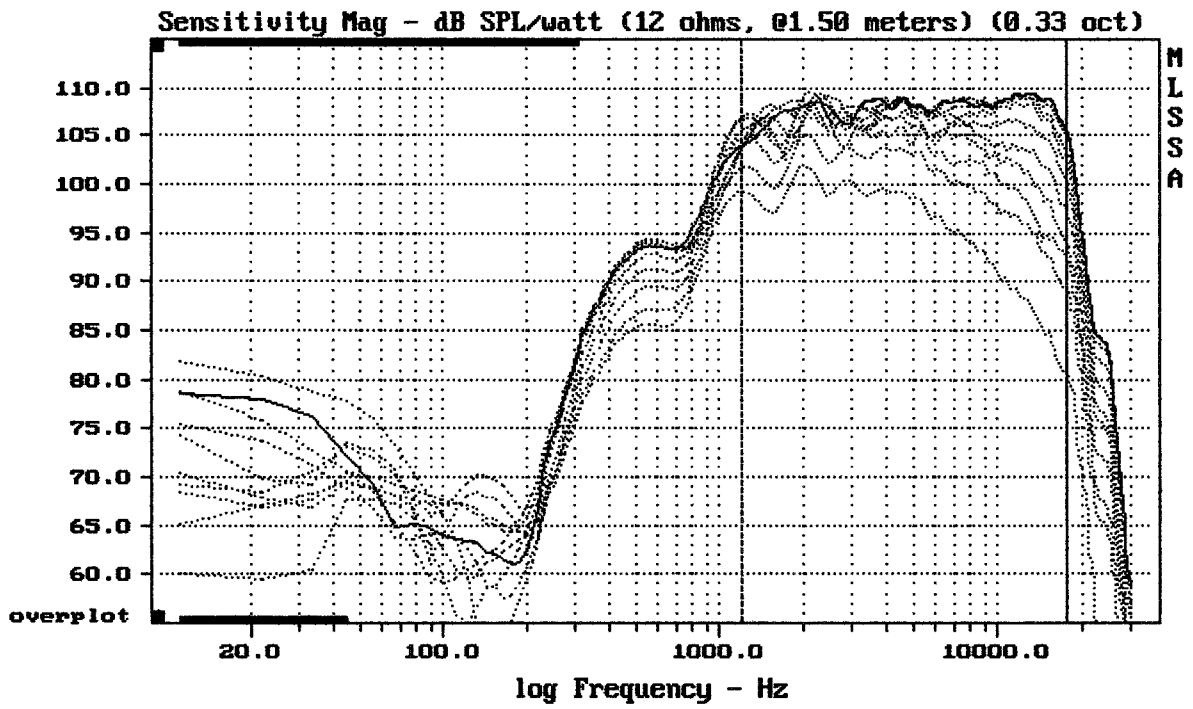

Overlay Compare: dev= +12/-8.9, std= 6.2, avg= -16


MACKIE HDA

MLSSA: Frequency Domain

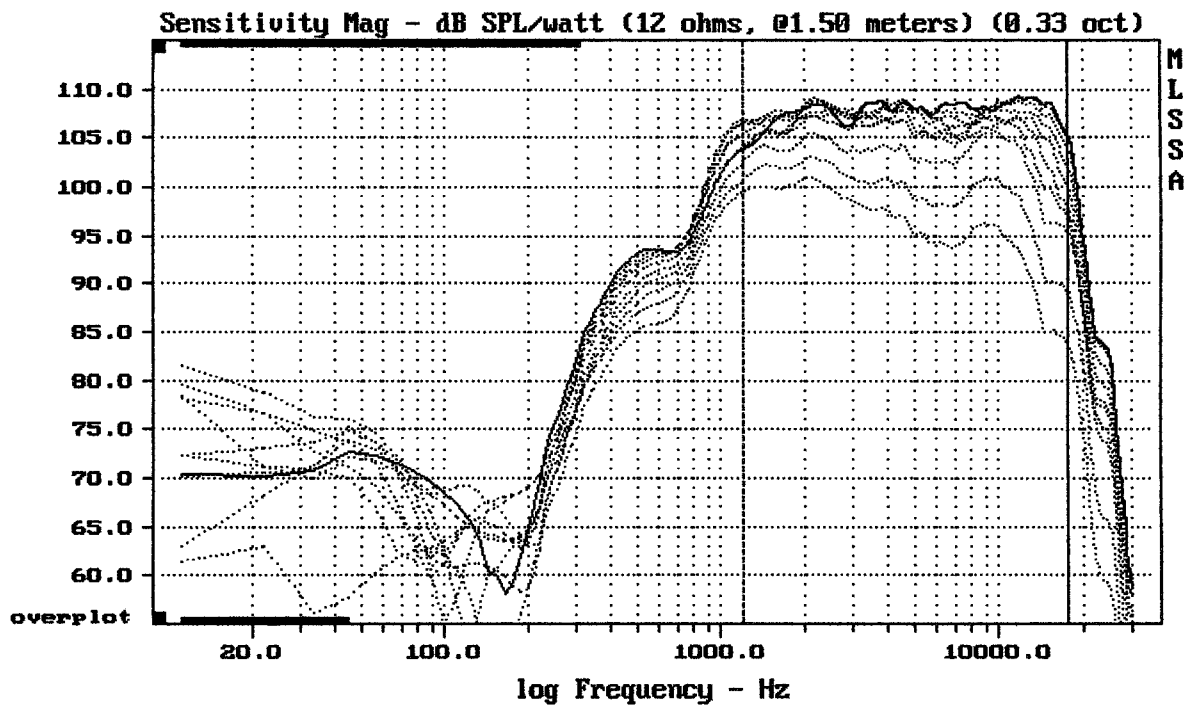

Overlay Compare: dev= +11/-8.5, std= 5, avg= -15


MACKIE HDA

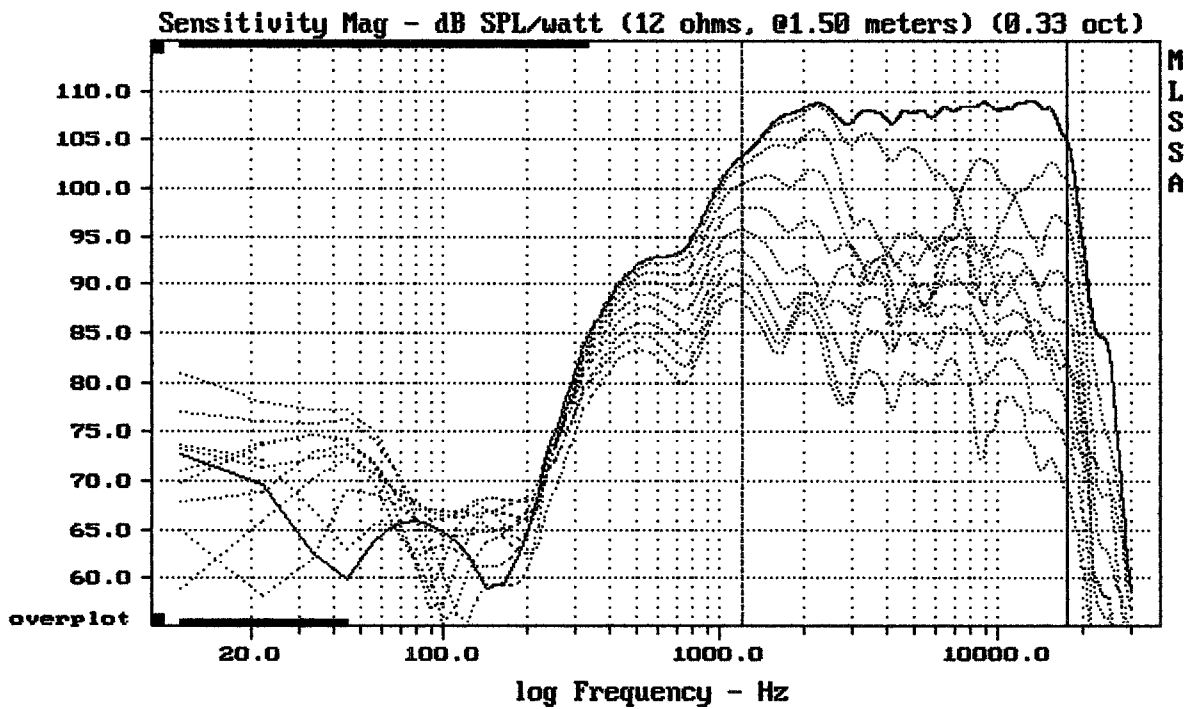

Overlay Compare: dev= +16/-6.5, std= 4.6, avg= -31


MACKIE HDA

MLSSA: Frequency Domain

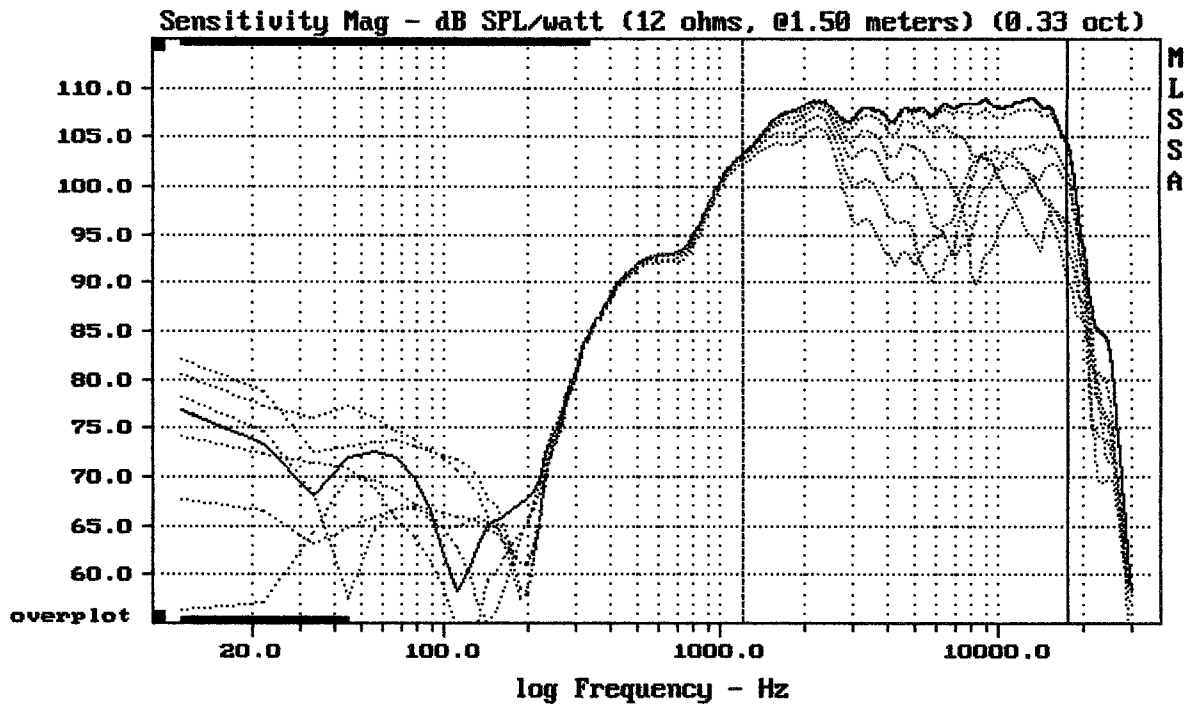

Overlay Compare: dev= +9/-5.8, std= 3.7, avg= -9.9


DTTO 0-20 DEG.

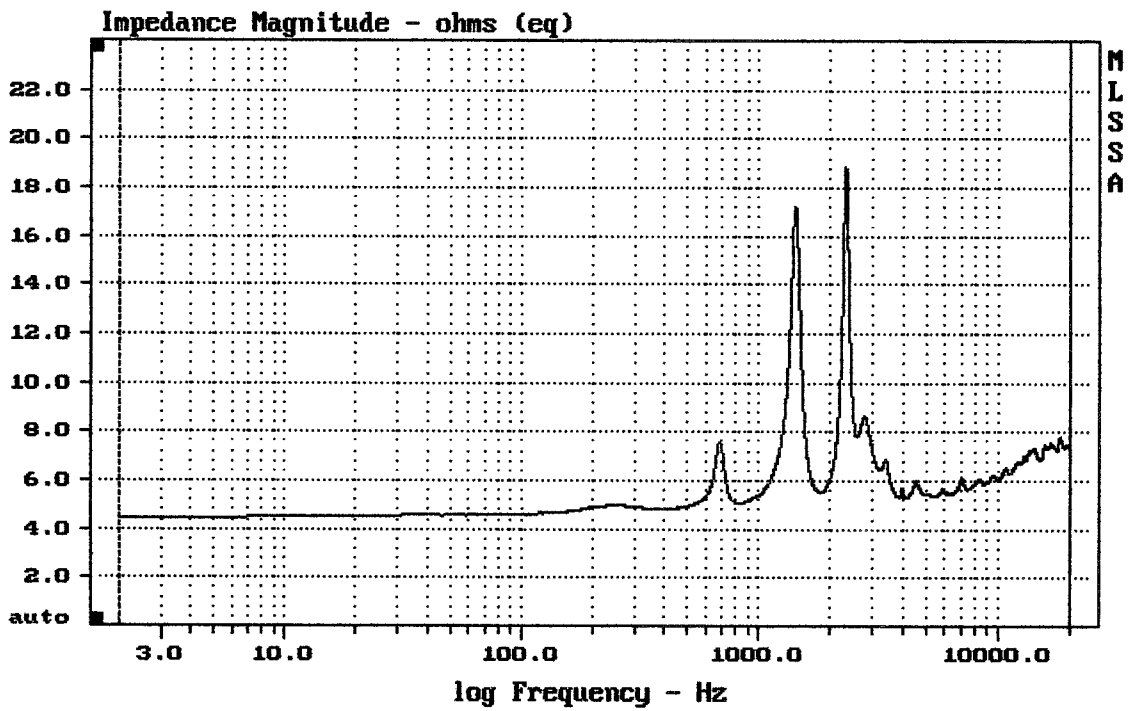

mean: 6.697, rms: 6.859, std: 1.481, max: 18.84, min: 4.41


DC08/1701-6 FROM HDA

MLSSA: Frequency Domain

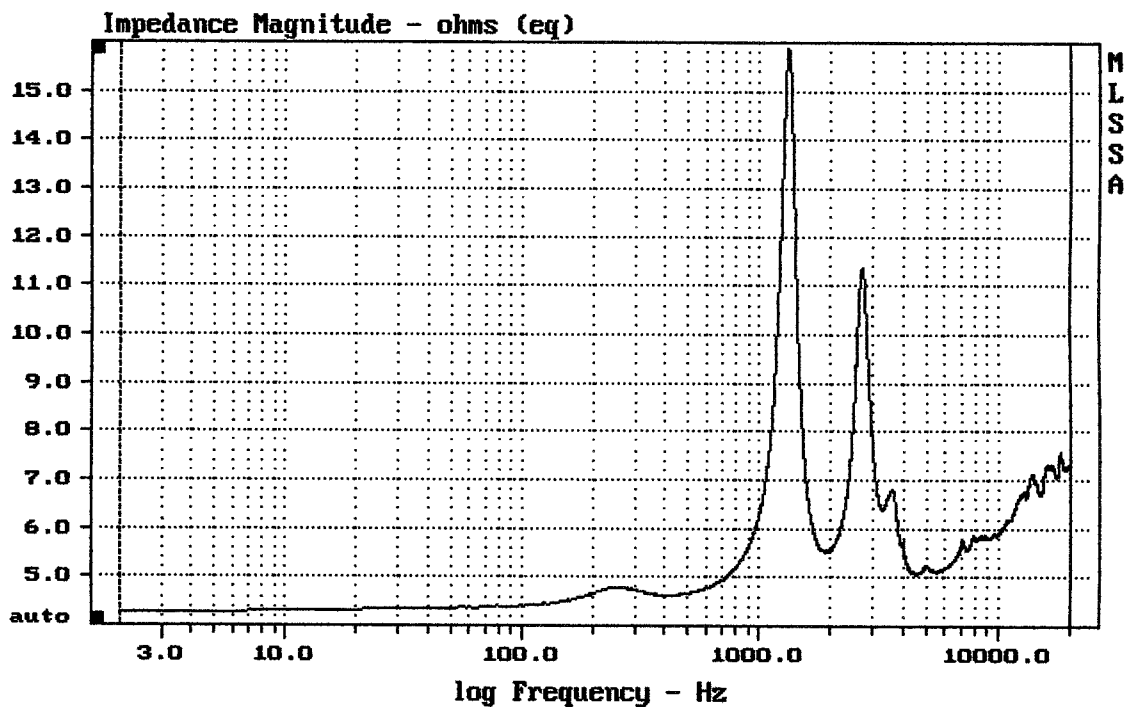

mean: 6.487, rms: 6.614, std: 1.292, max: 15.89, min: 4.276


DITO DRIVER

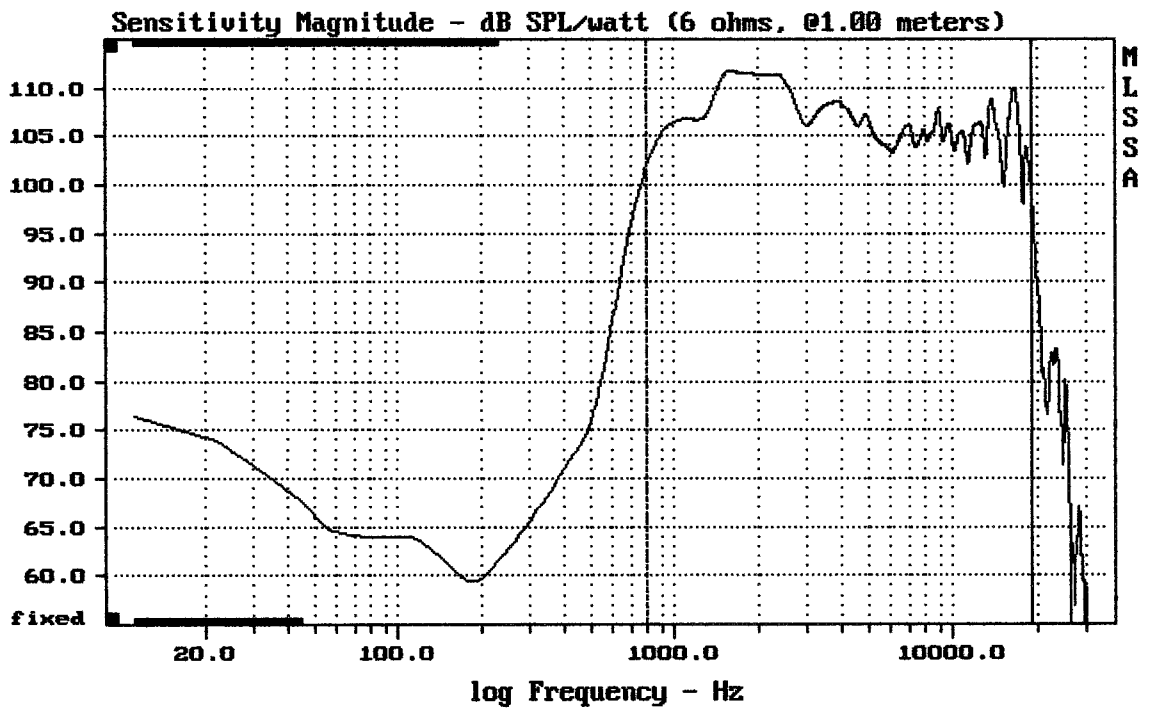


Level (799:19309 Hz) = 107.76 dB SPL/watt (6 ohms, @1.00 meters)

3/4" FROM HDA + A7570

MLSSA: Frequency Domain

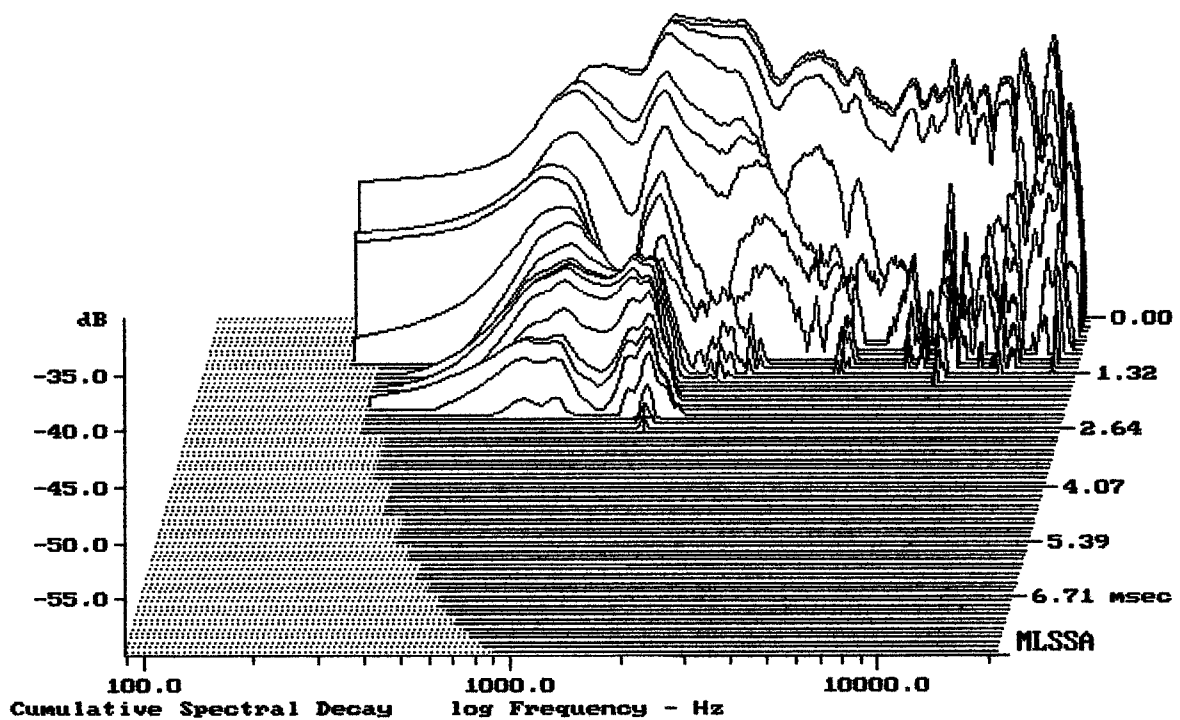


-59.02 dB, 1554 Hz (35), 2.640 msec (25)

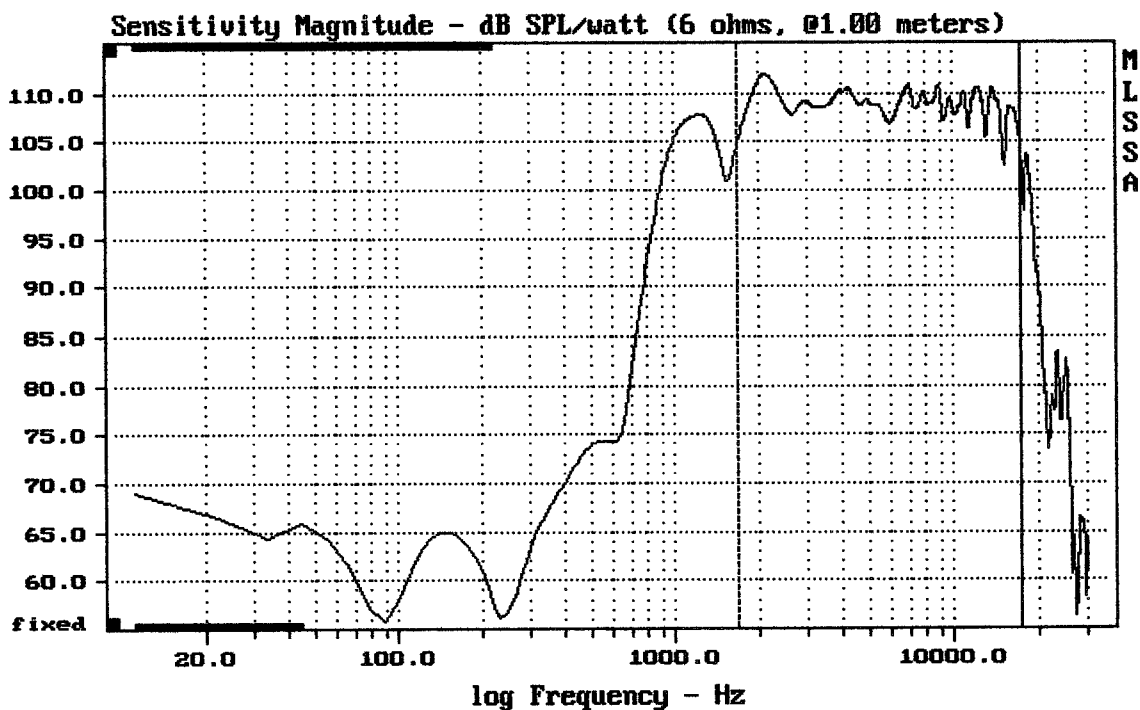


Level (1698:17556 Hz) = 109.13 dB SPL/watt (6 ohms, @1.00 meters)

3/4" FROM HDA + ME7

MLSSA: Frequency Domain

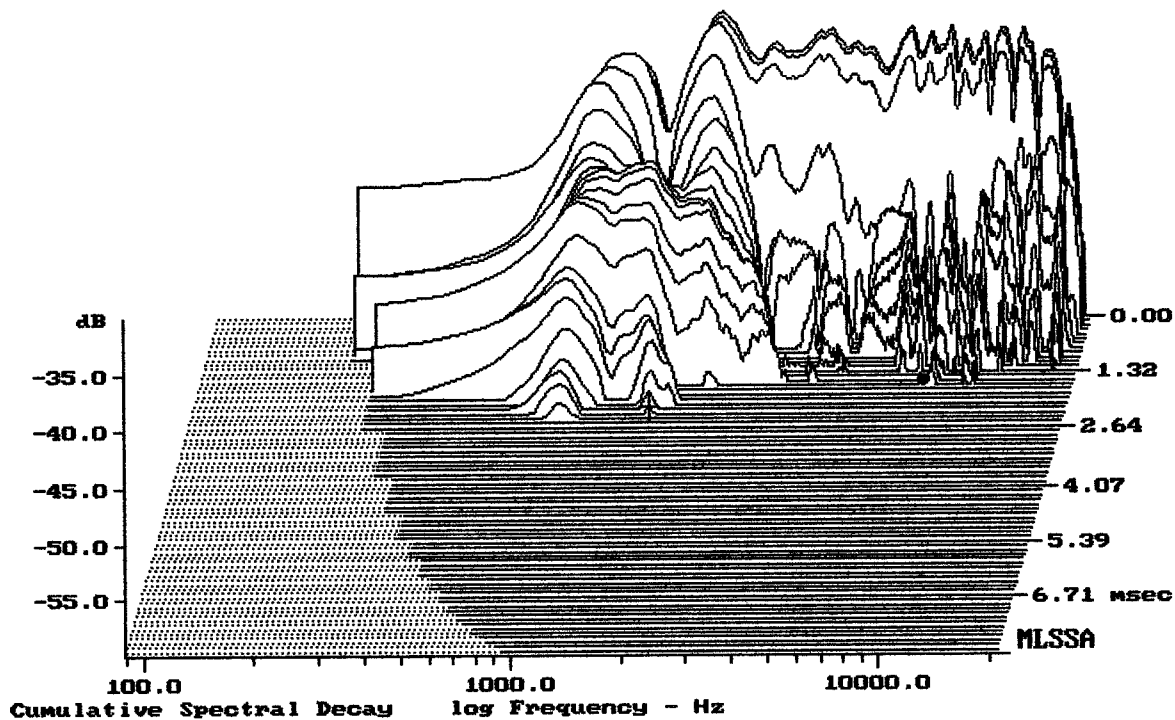

-59.40 dB, 1554 Hz (35), 2.310 msec (22)

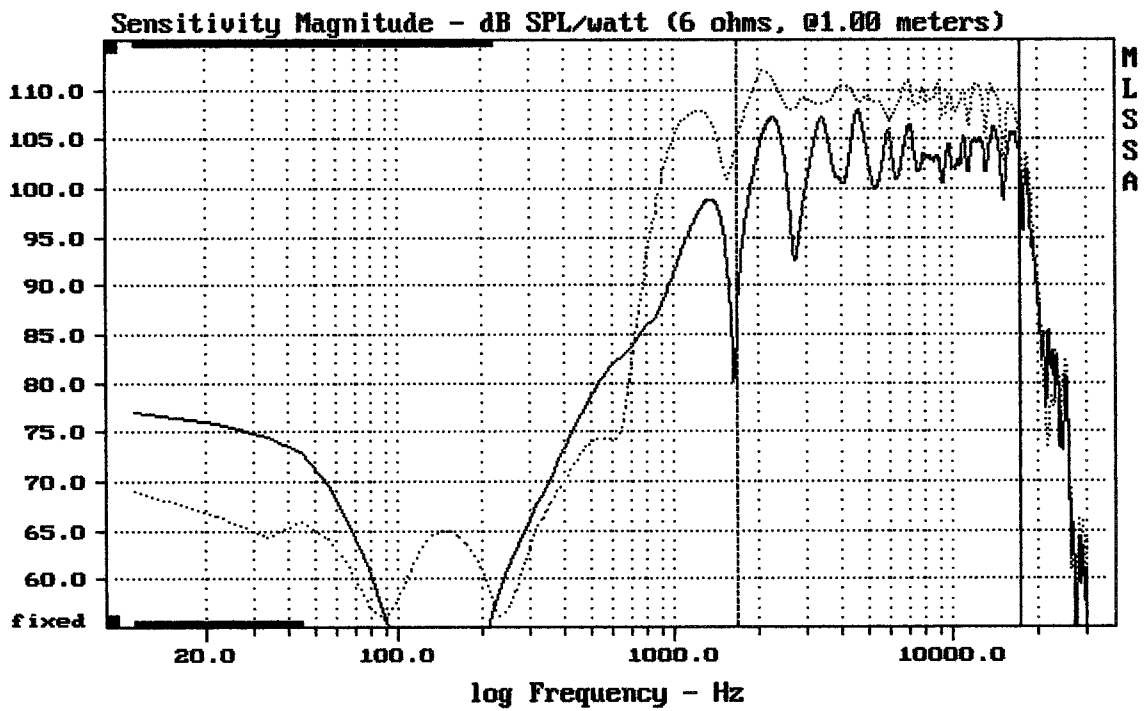


Overlay Compare: dev= +4.3/-12, std= 2.3, avg= -5.3

3/4" FROM HDA + ME7

/ HAA WARRGUAZ —


MLSSA: Frequency Domain

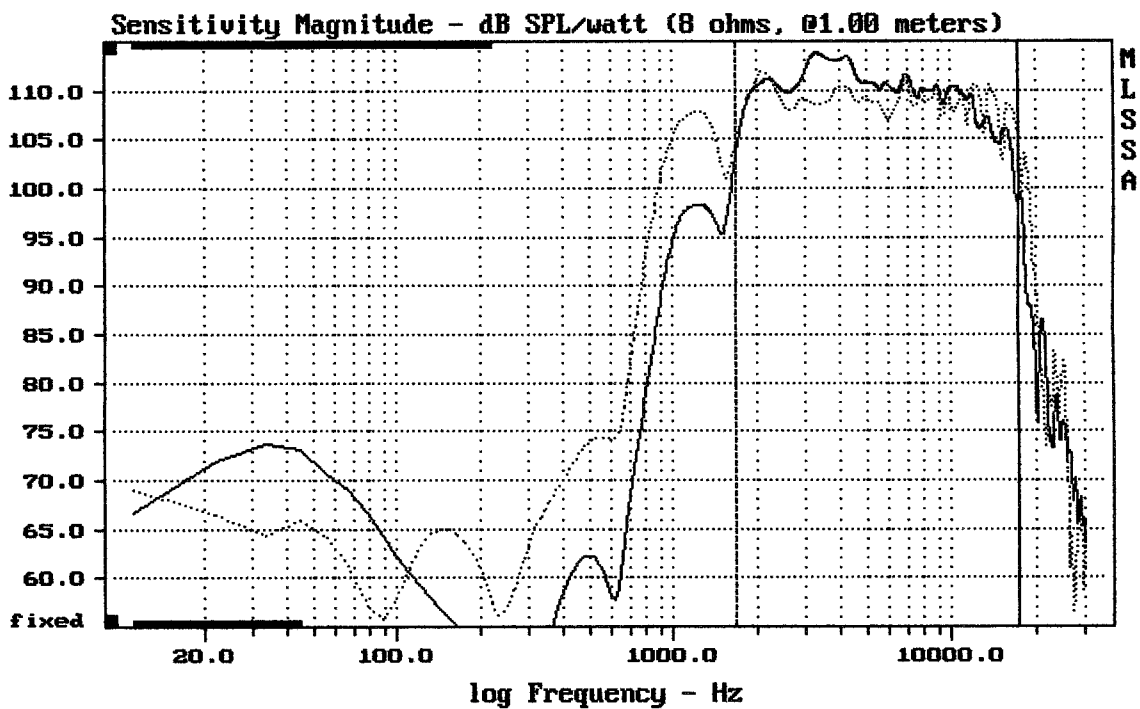

Overlay Compare: dev= +5.4/-7.7, std= 2.9, avg= -0.071

3/4" FROM HDA + ME7


/ JR7 —

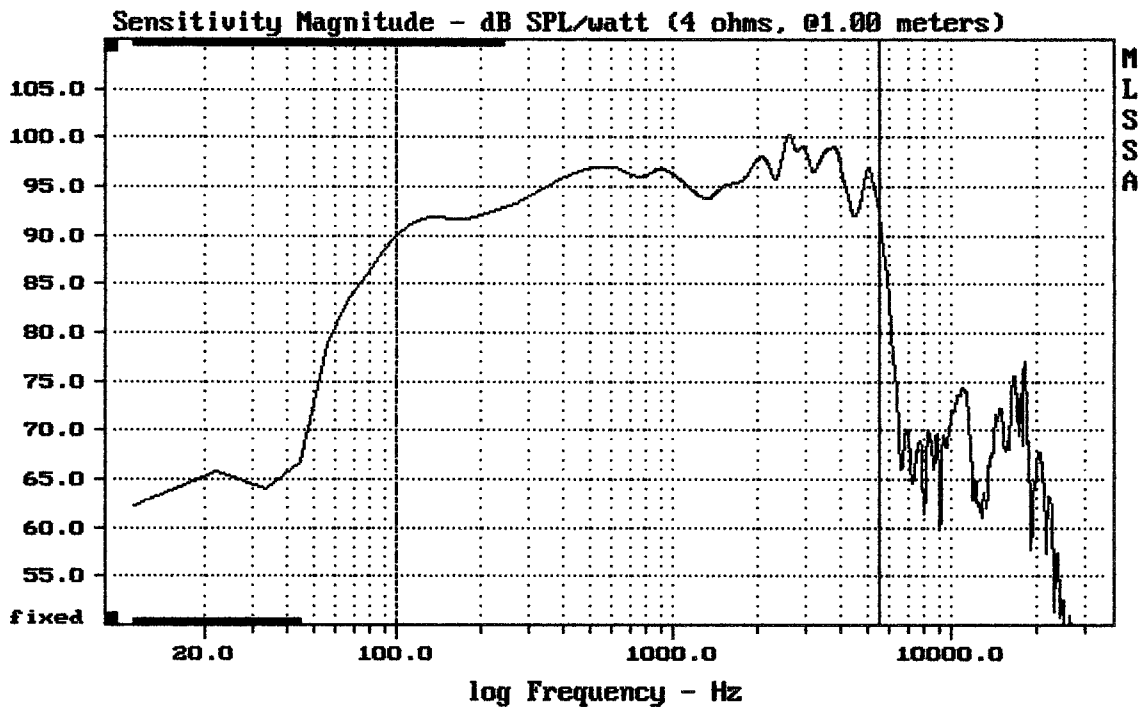

Level (100:5504 Hz) = 95.61 dB SPL/watt (4 ohms, @1.00 meters)

12" FROM HDA

MLSSA: Frequency Domain

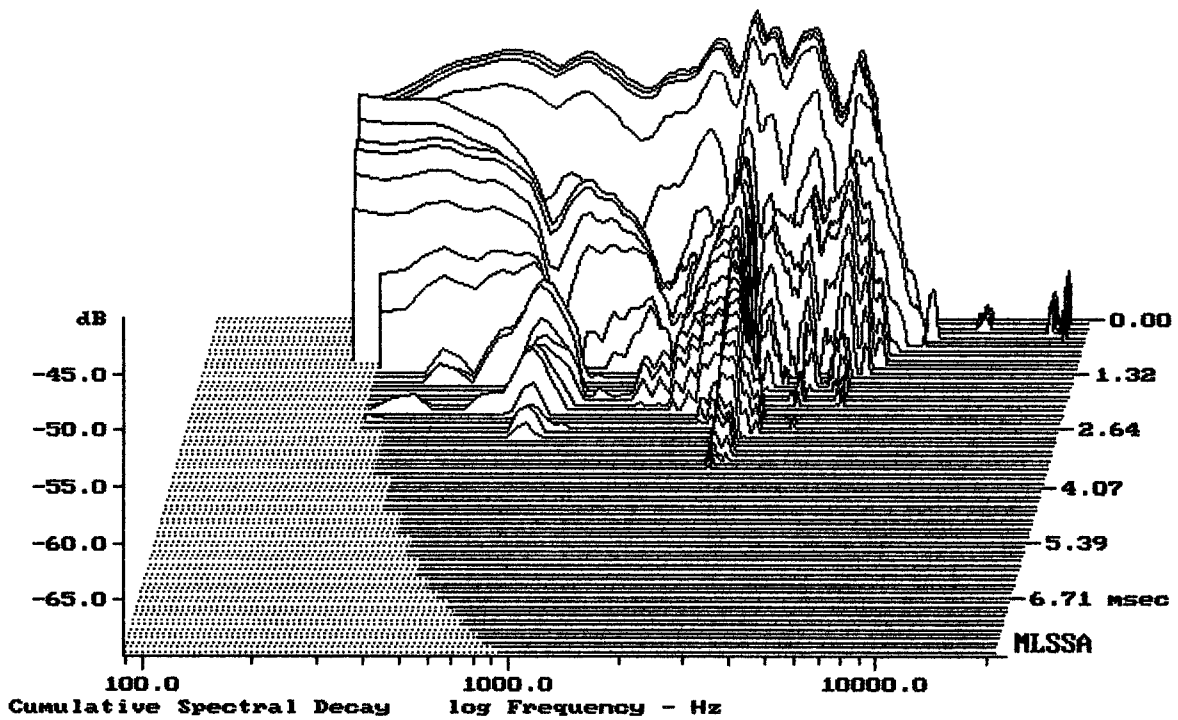

-69.13 dB, 2530 Hz (57), 3.520 msec (33)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.20	Ohms
2	Fs	50.92	Hz
3	Re	3.79	Ohms[dc]
4	Res	68.58	Ohms
5	Qms	6.24	
6	Qes	0.35	
7	Qts	0.33	
8	L1	0.40	mH
9	L2	0.73	mH
10	R2	2.48	Ohms
11	RMSE-load	0.40	Ohms
12	Vas(Sd)	85.46	liters
13	Mms	48.84	grams
14	Cms	200	$\mu\text{M}/\text{Newton}$
15	B1	13.10	Tesla-M
16	SPLref(Sd)	97.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.0% (-20% to -50% is recommended).

T5786A P/N 2035967 LN12-3003-4 FROM MACKIE HDA

MLSSA: Parameters

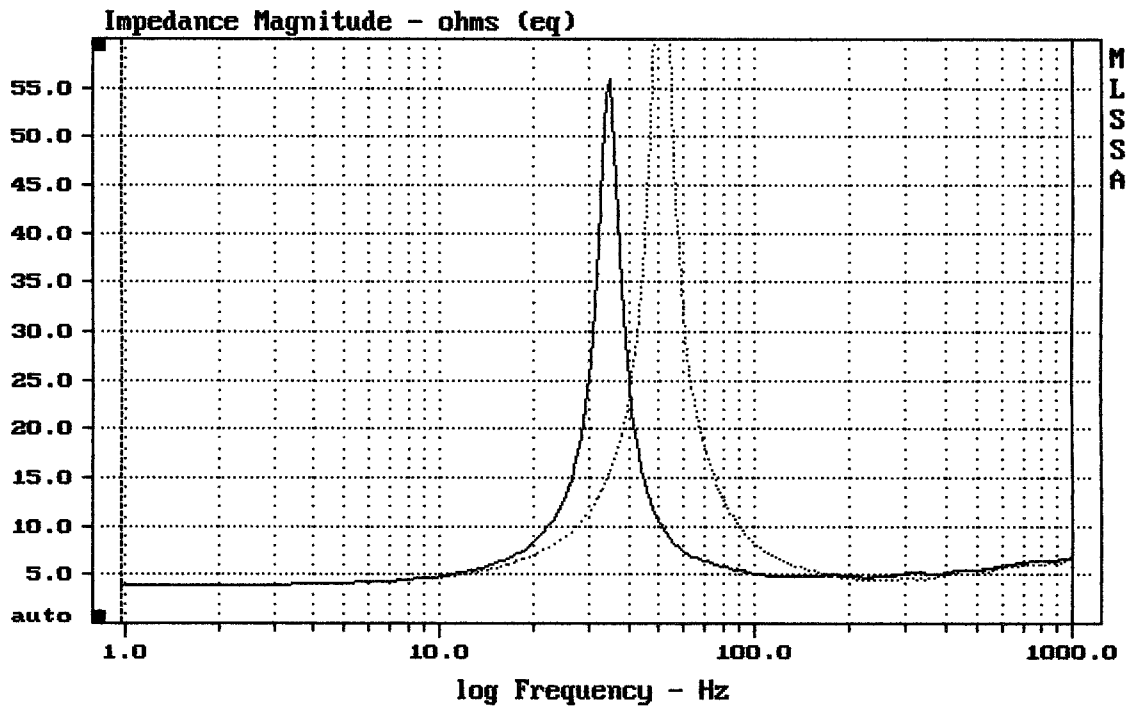

mean: 6.869, rms: 9.589, std: 6.691, max: 72.67, min: 3.859

MLSSA: Frequency Domain