


E-shop:


<http://eshop.prodance.cz/art-712a-mkii/d-97056/>

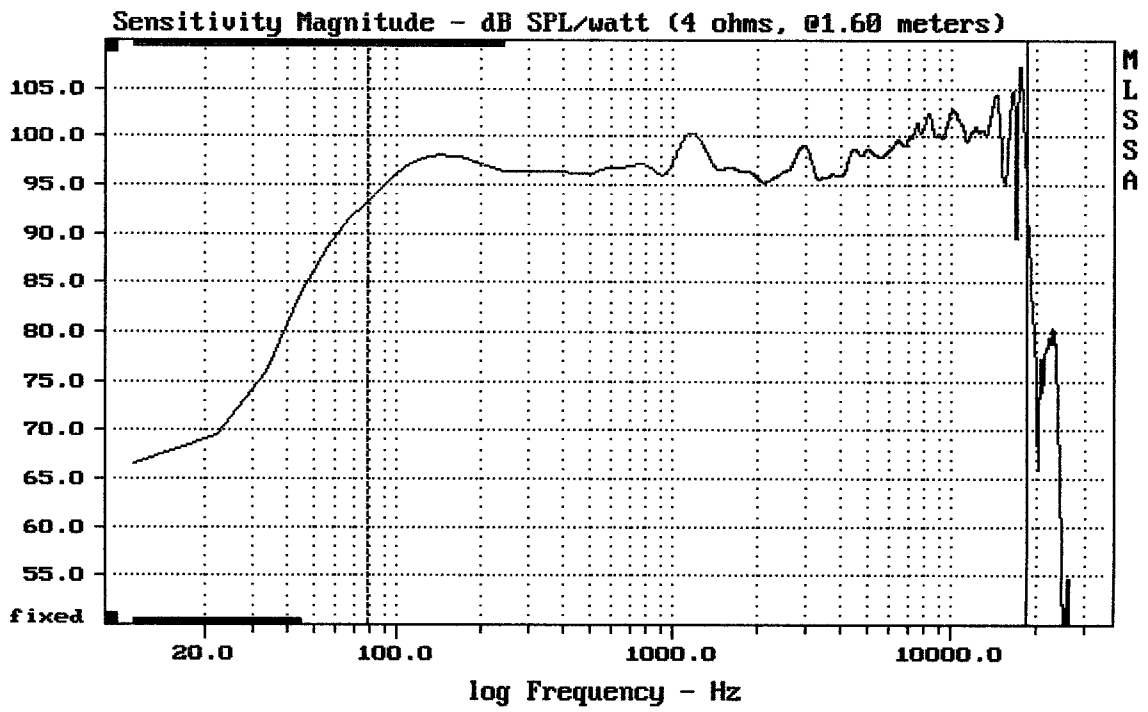


mean: 100.07, rms: 100.53, std: 2.51, max: 107.25, min: 89.56

ART712-A MK II

MLSSA: Frequency Domain

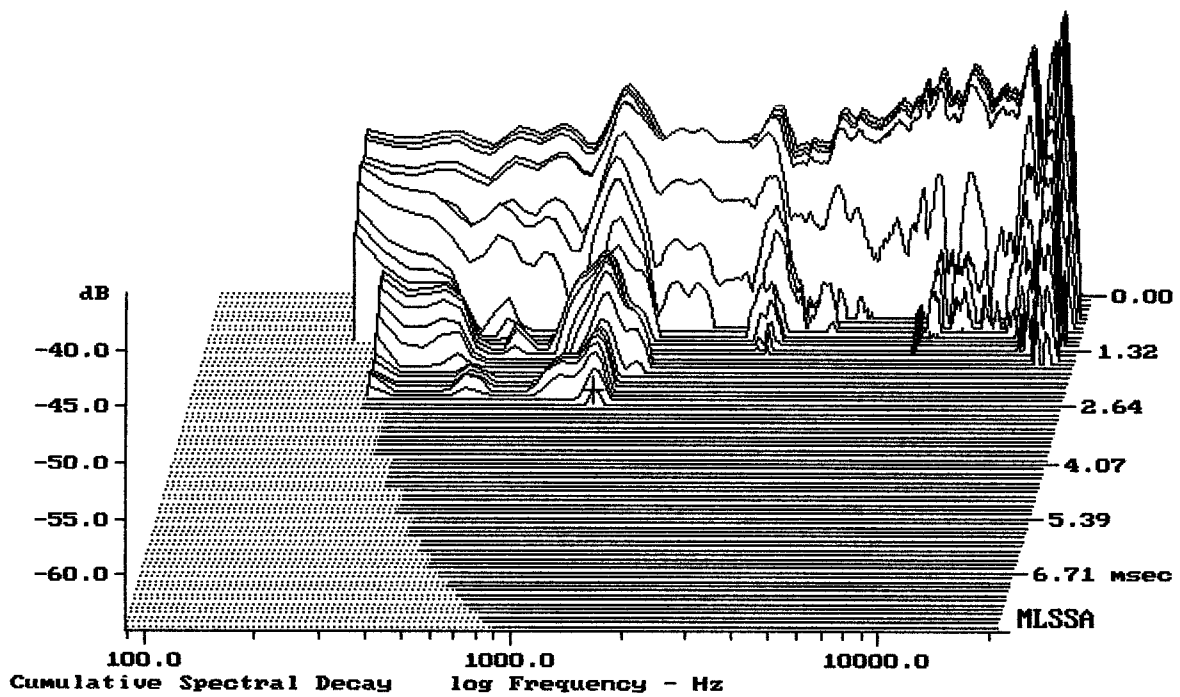


-63.78 dB, 1110 Hz (25), 2.640 msec (25)

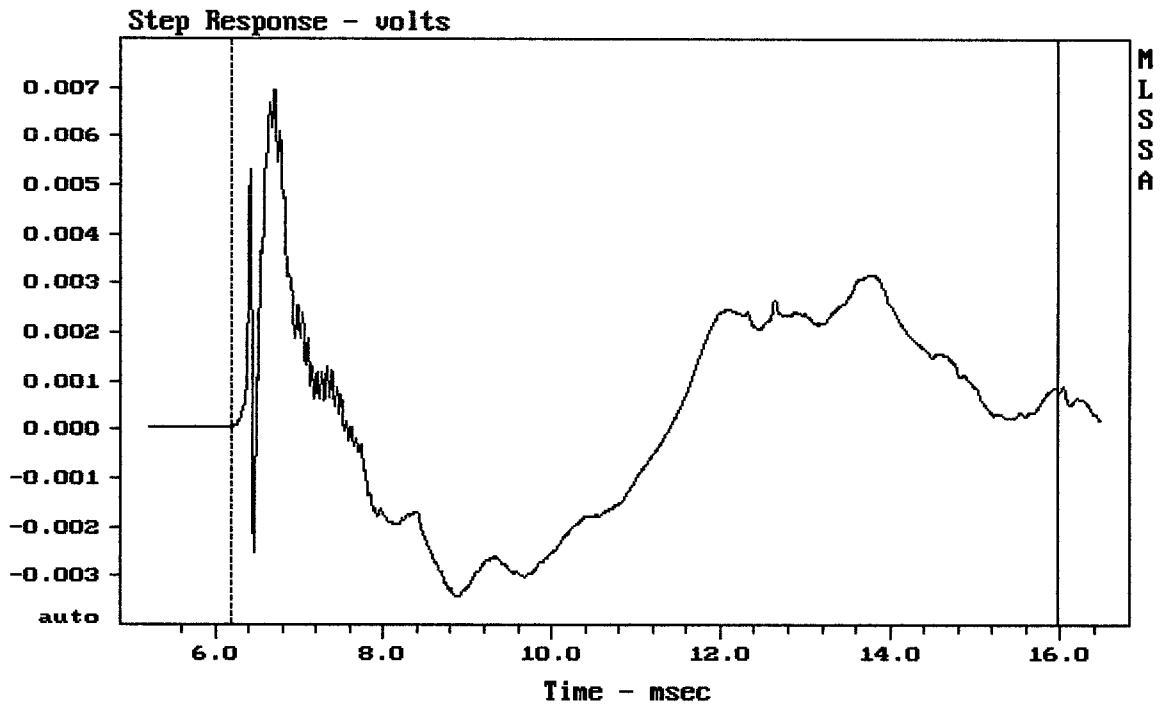

mean: 0.0003209, rms: 0.002215, std: 0.002191, max: 0.006967, min: -0.003429


ART712-A MK II

MLSSA: Time Domain

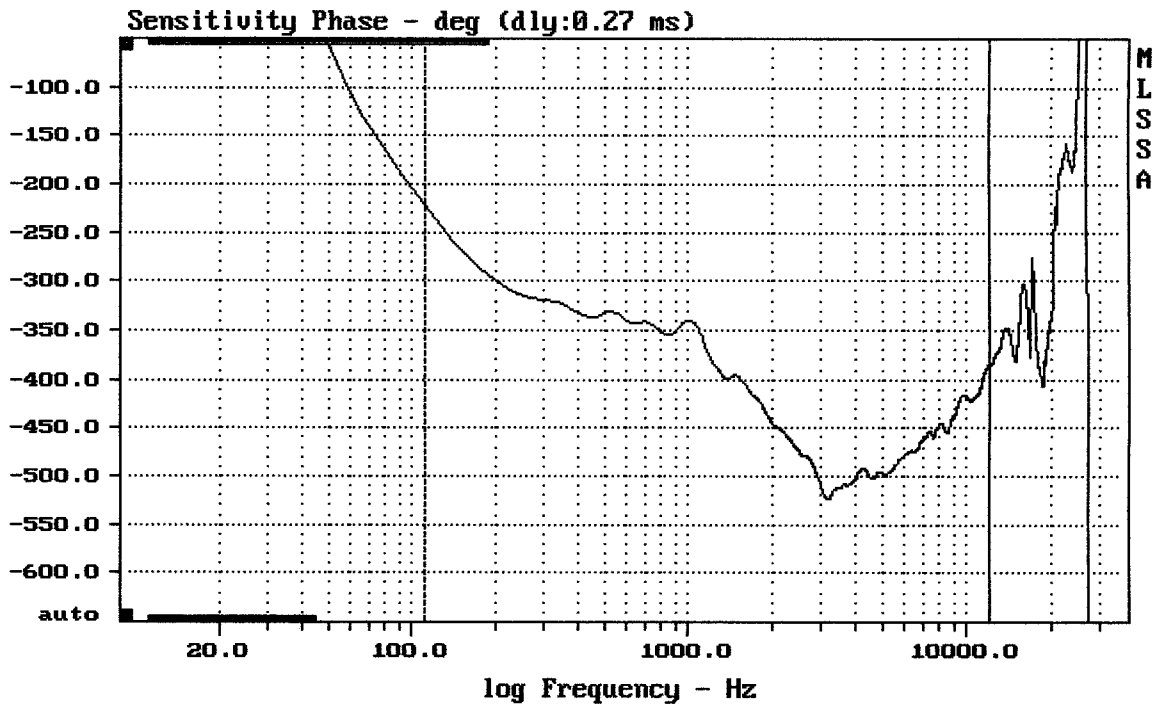


mean: -443.7, rms: 446.6, std: 50.66, max: -221.4, min: -523.3

ART712-A MK II

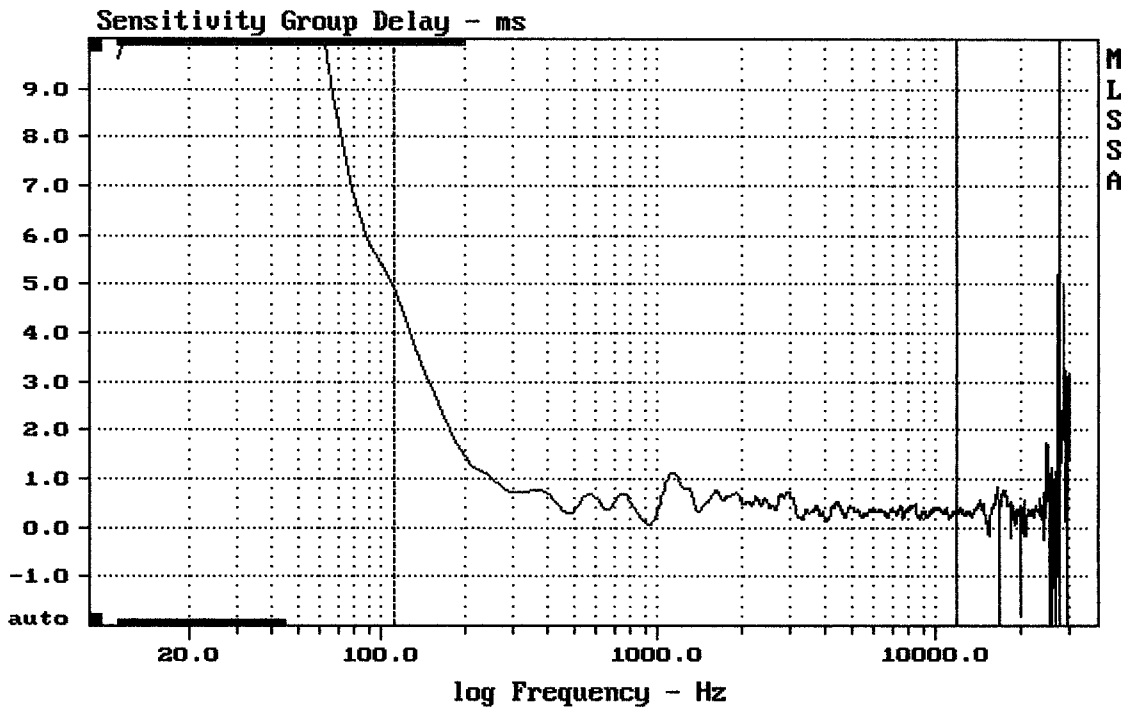


ART712-A MK II

MLSSA: Frequency Domain

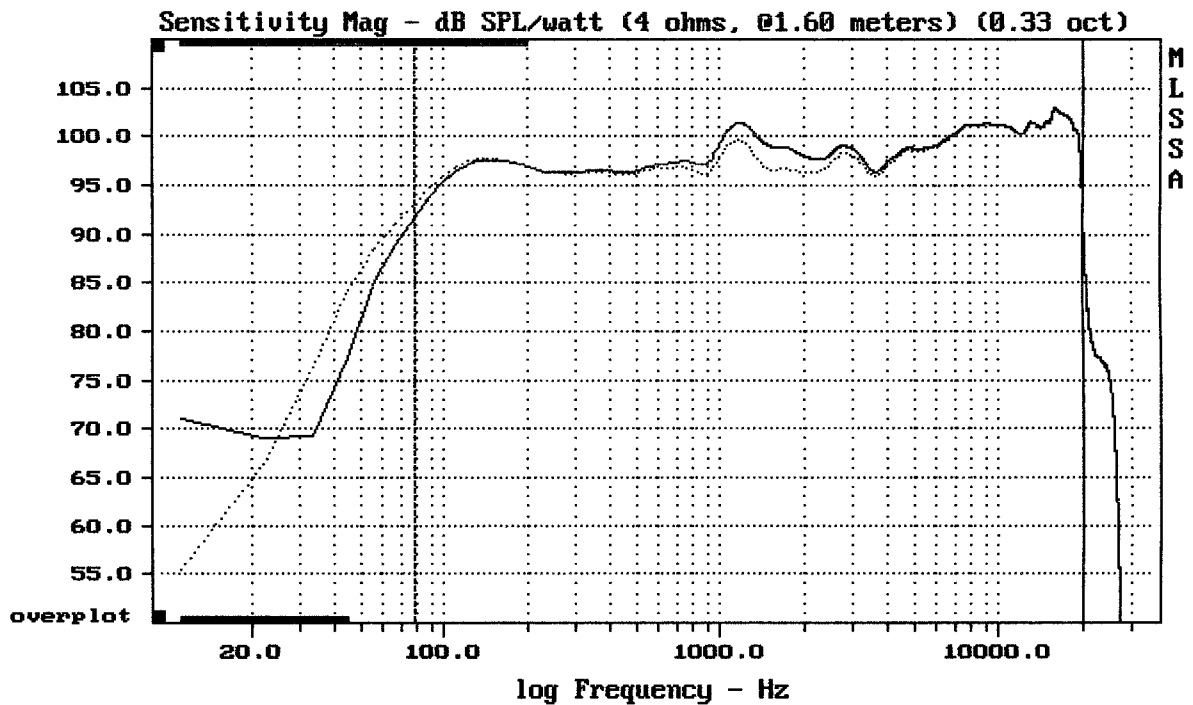

Overlay Compare: dev= +1.6/-2.1, std= 0.5, avg= -0.24


ART712-A MK II

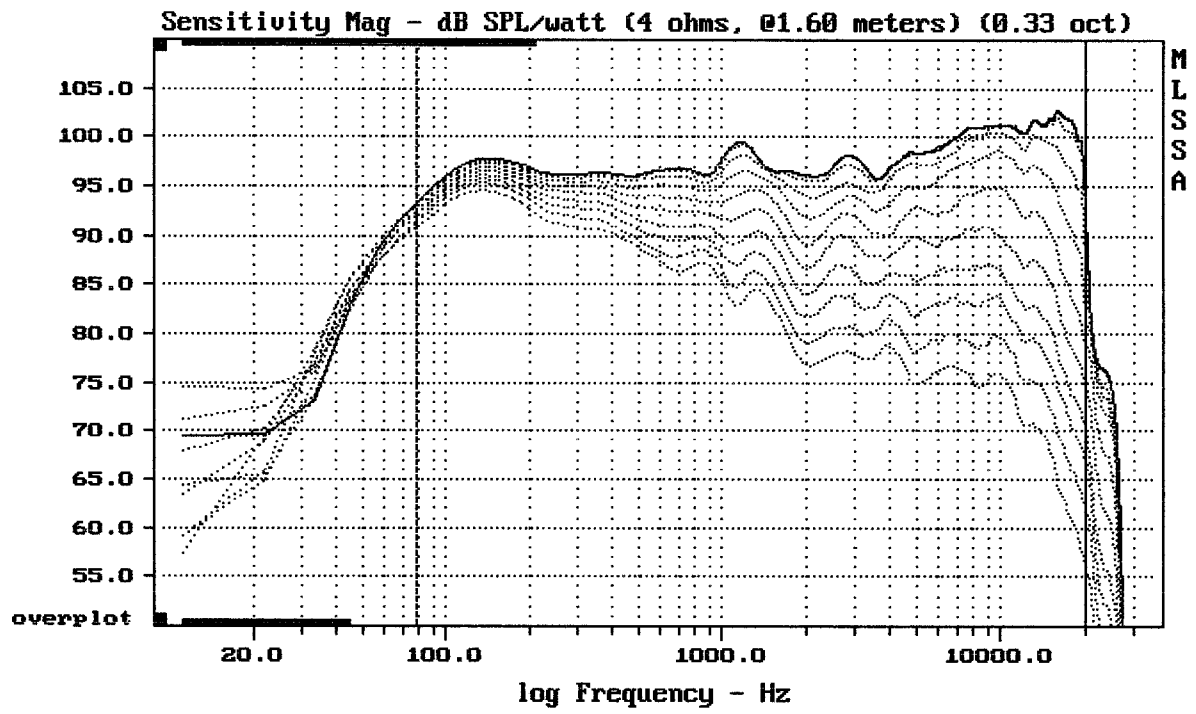

Overlay Compare: dev= +25/-14, std= 8.8, avg= -28


ART712-A MK II

MLSSA: Frequency Domain

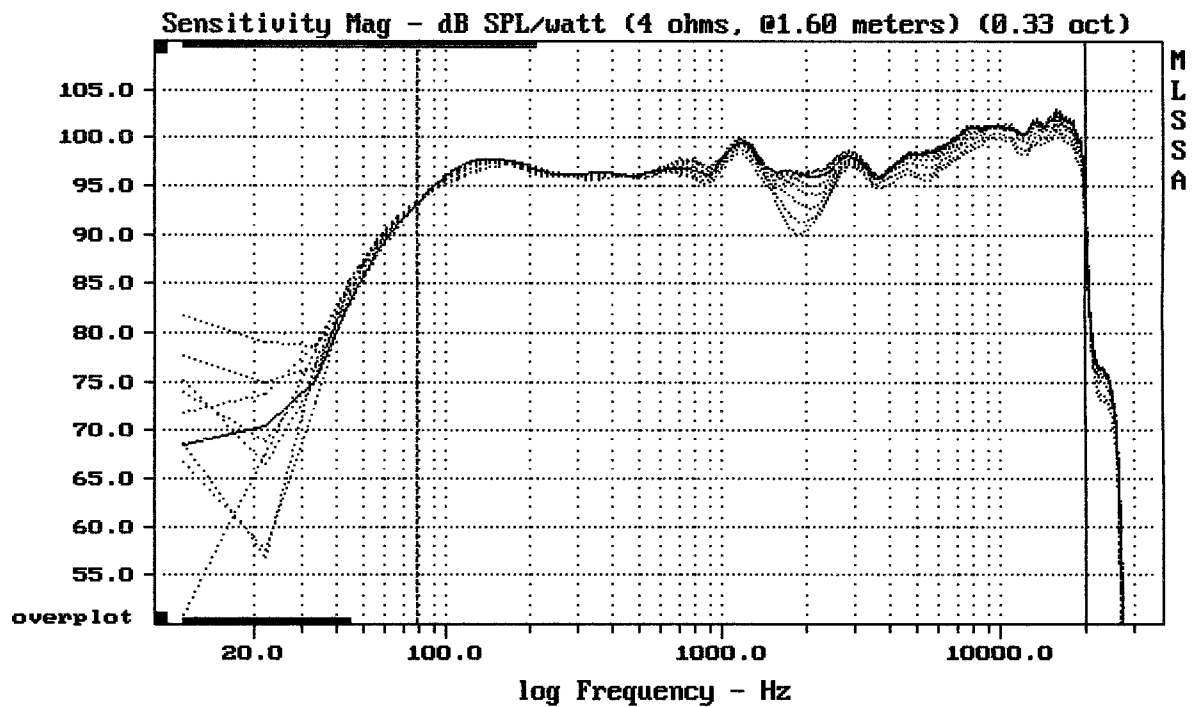

mean: 98.08, rms: 98.29, std: 1.77, max: 100.75, min: 88.73


ART712-A MK II

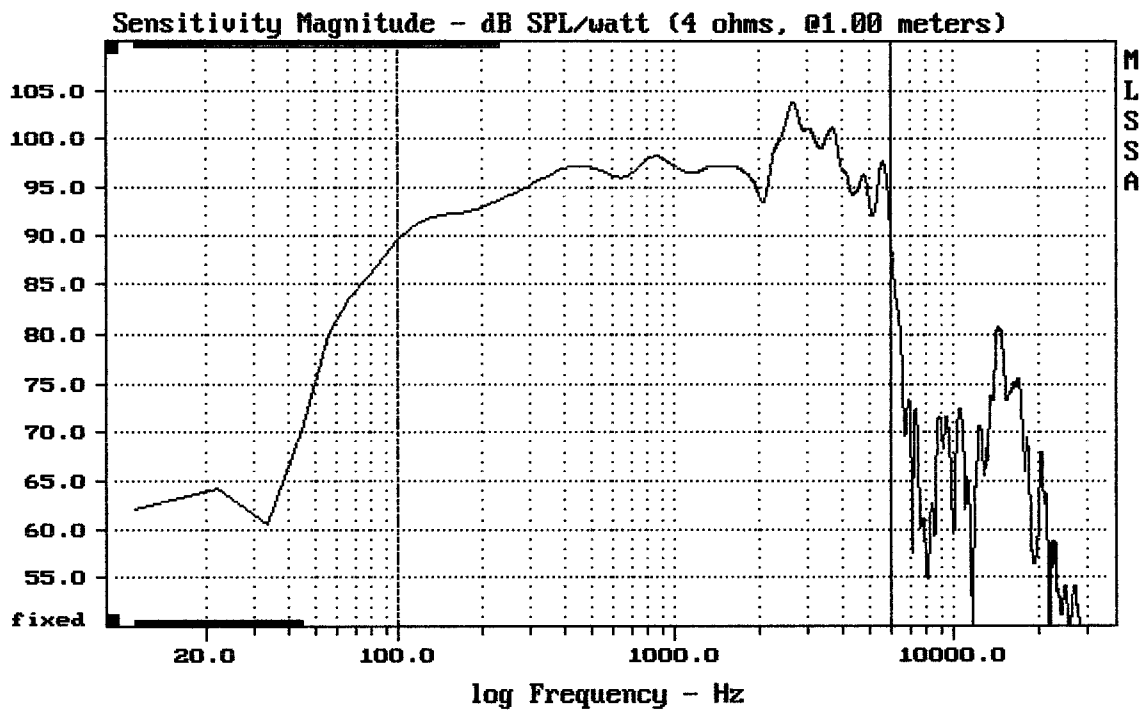

Level (100:6004 Hz) = 96.88 dB SPL/watt (4 ohms, @1.00 meters)

ART712-A MK II

MLSSA: Frequency Domain

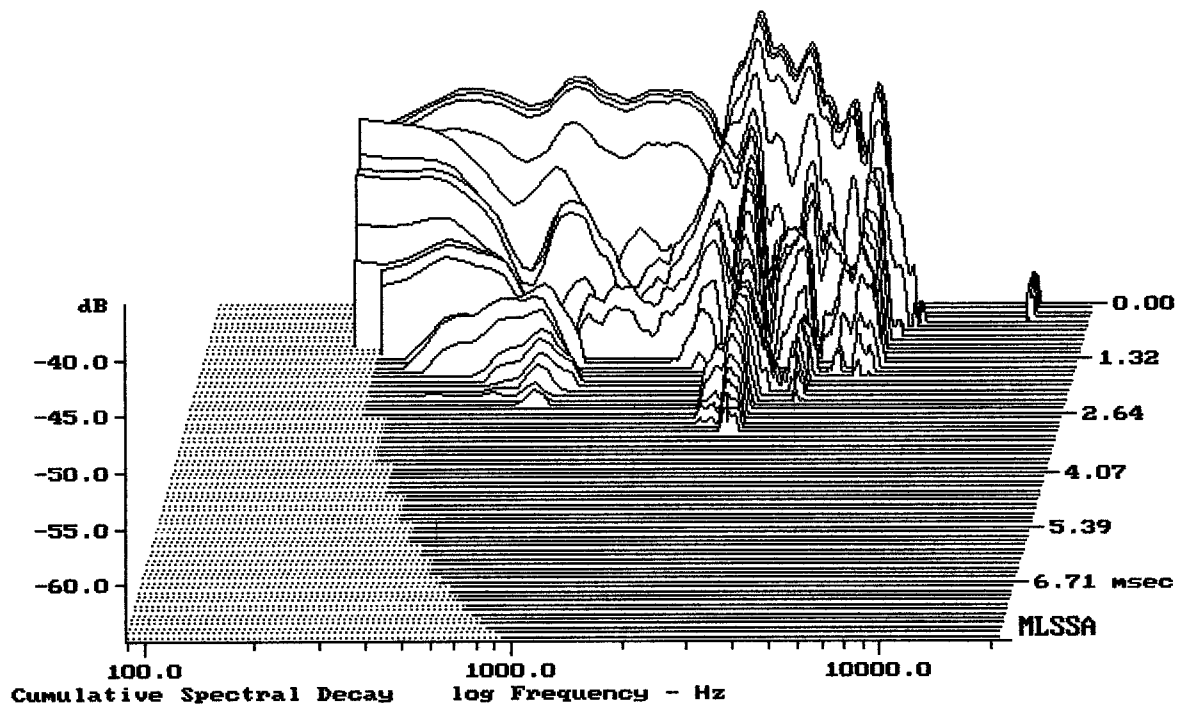

-62.94 dB, 2663 Hz (60), 3.080 msec (29)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.39	Ohms
2	Fs	59.16	Hz
3	Re	3.68	Ohms[dc]
4	Res	68.11	Ohms
5	Qms	5.82	
6	Qes	0.31	
7	Qts	0.30	
8	L1	0.45	mH
9	L2	0.92	mH
10	R2	3.11	Ohms
11	RMSE-load	0.26	Ohms
12	Vas(Sd)	75.55	liters
13	Mms	37.93	grams
14	Cms	191	$\mu\text{M}/\text{Newton}$
15	B1	12.84	Tesla-M
16	SPLref(Sd)	98.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -42.8% (-20% to -50% is recommended).

ART712-A MK II

MLSSA: Parameters

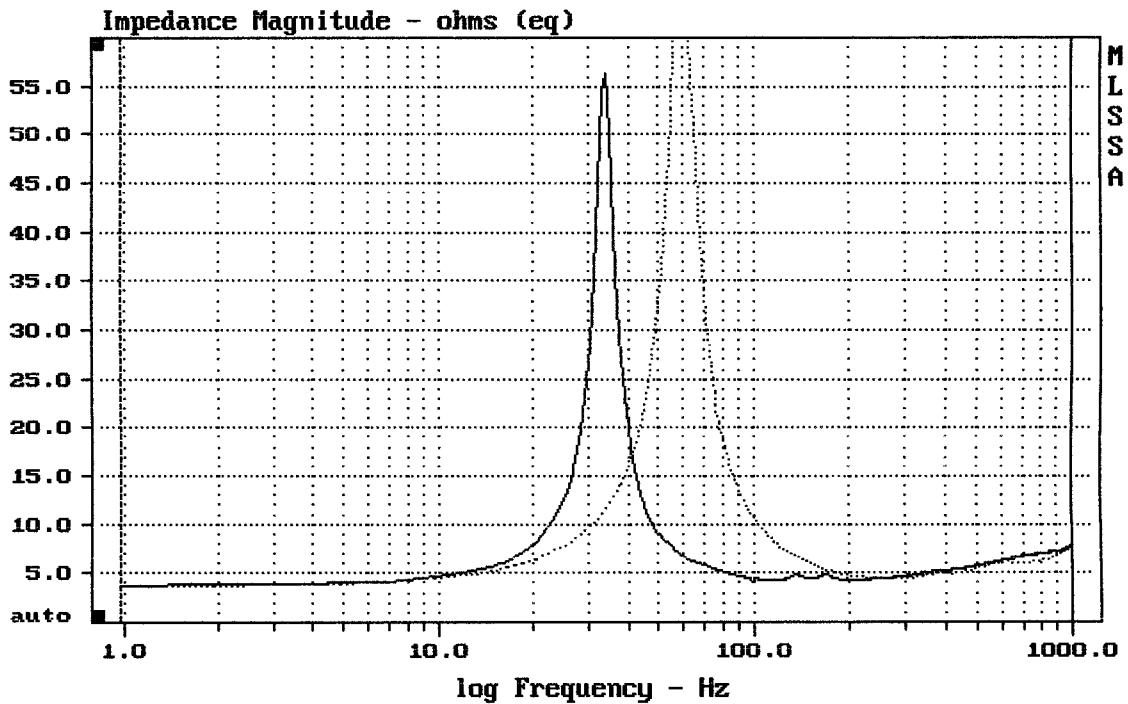

mean: 7.37, rms: 10.38, std: 7.306, max: 71.53, min: 3.769

MLSSA: Frequency Domain