


E-shop:


<http://eshop.prodance.cz/art-725a-mkii/d-97059/>

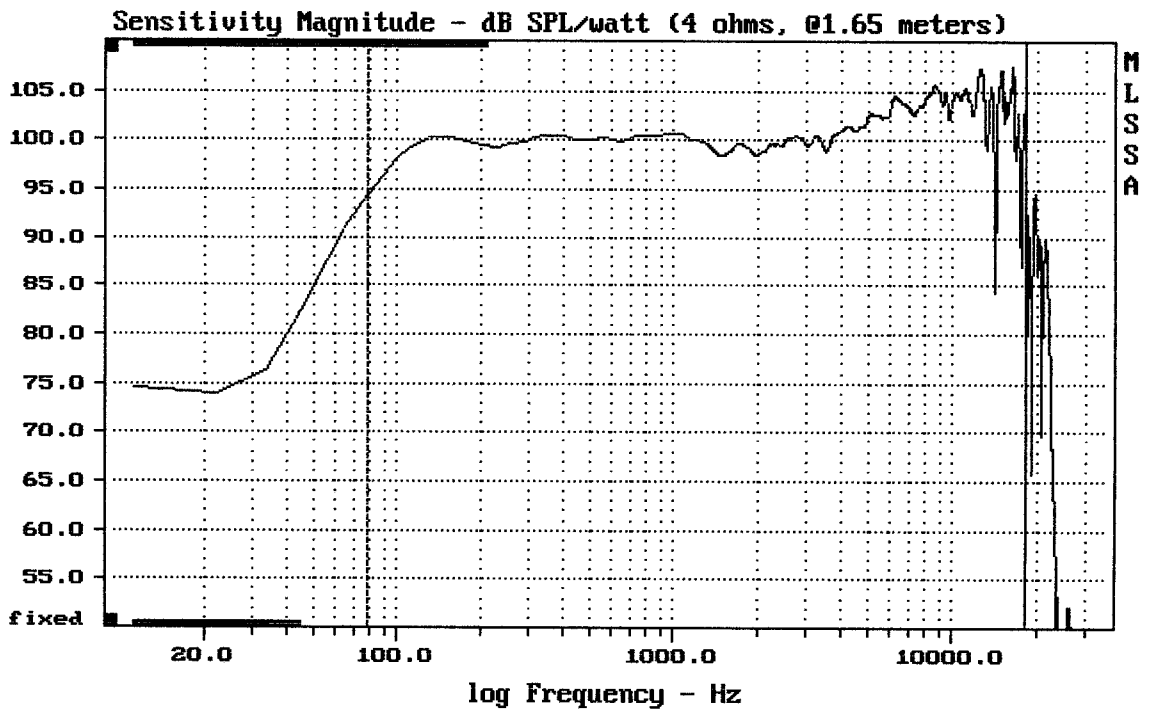


Level (78:18211 Hz) = 101.14 dB SPL/watt (4 ohms, @1.65 meters)

ART725-A MK II

MLSSA: Frequency Domain

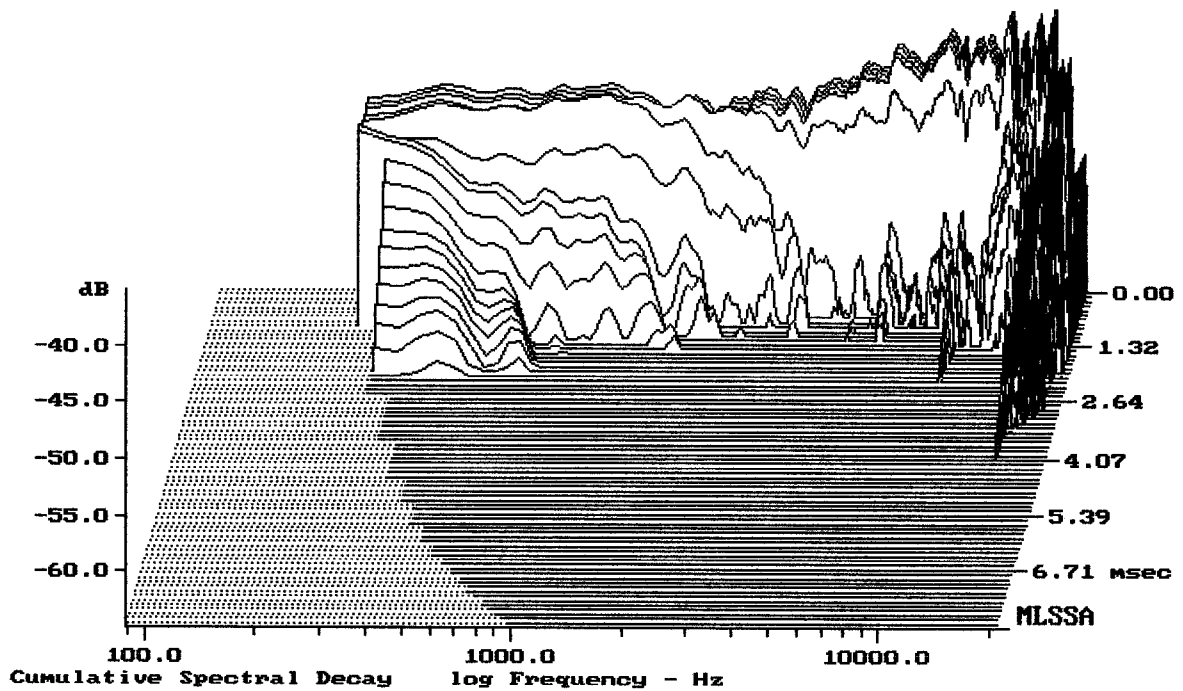


-64.31 dB, 15314 Hz (345), 3.960 msec (37)

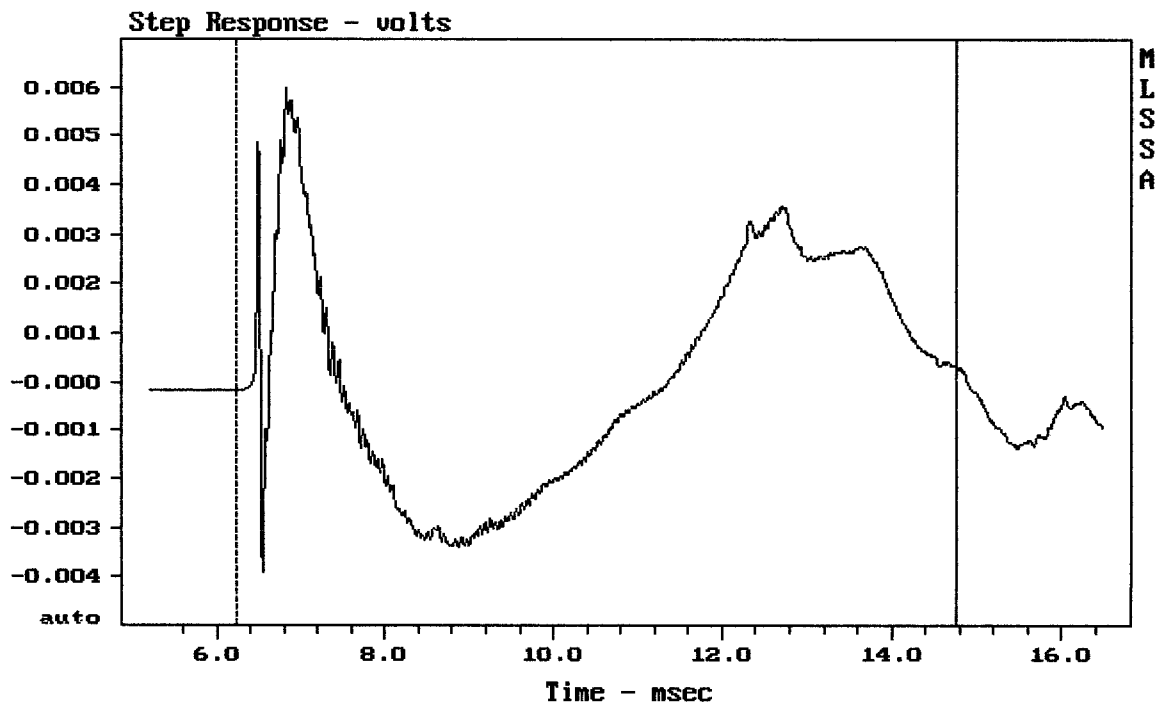

mean: 0.0001509, rms: 0.002339, std: 0.002334, max: 0.005991, min: -0.003899


ART725-A MK II

MLSSA: Time Domain

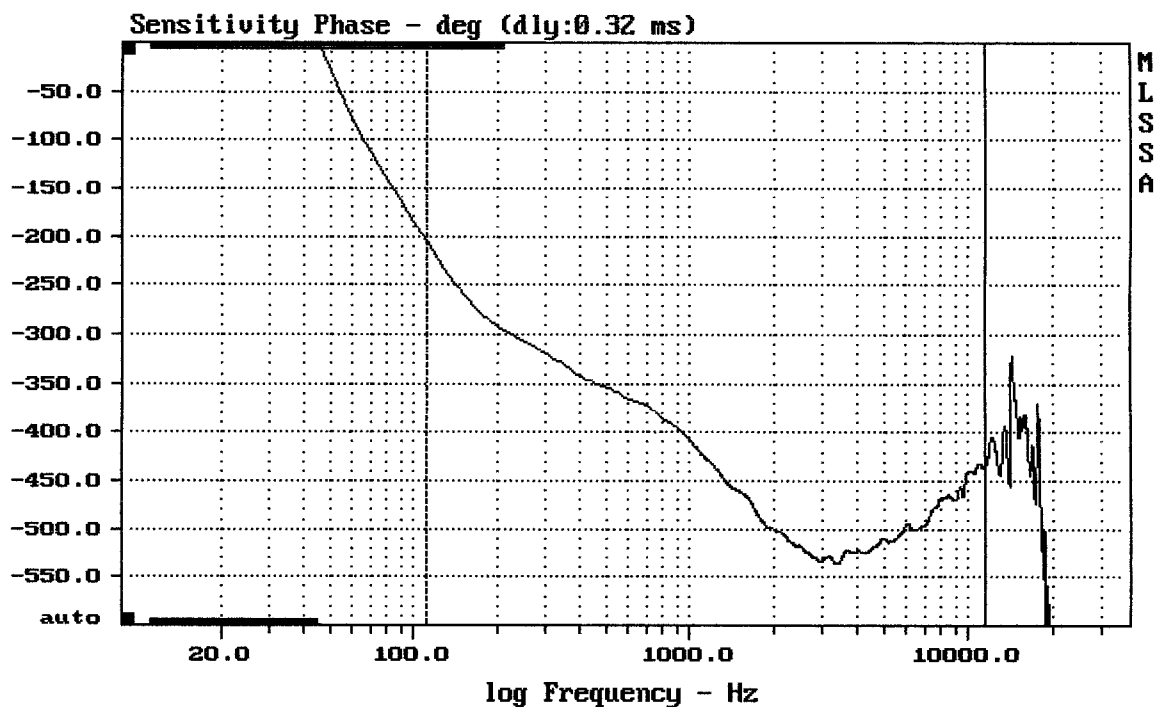

mean: -474.7, rms: 477.3, std: 49.57, max: -205.5, min: -536.2


ART725-A MK II

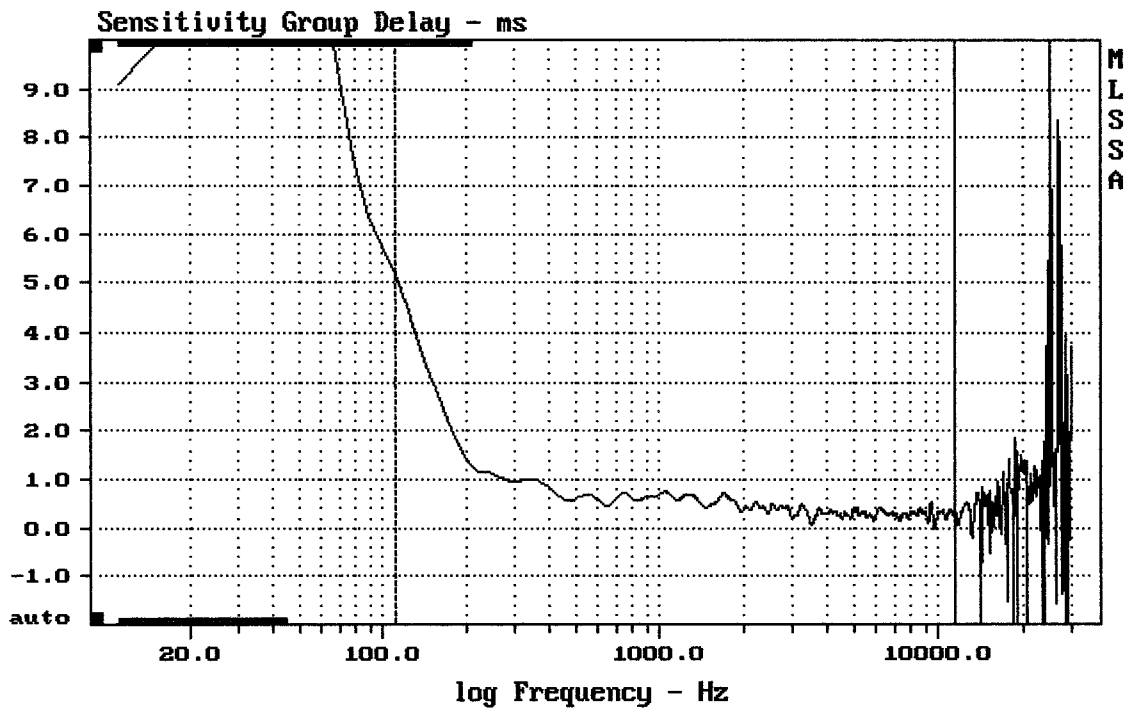

mean: 0.3805, rms: 0.4974, std: 0.3203, max: 5.166, min: -0.01816


ART725-A MK II

MLSSA: Frequency Domain

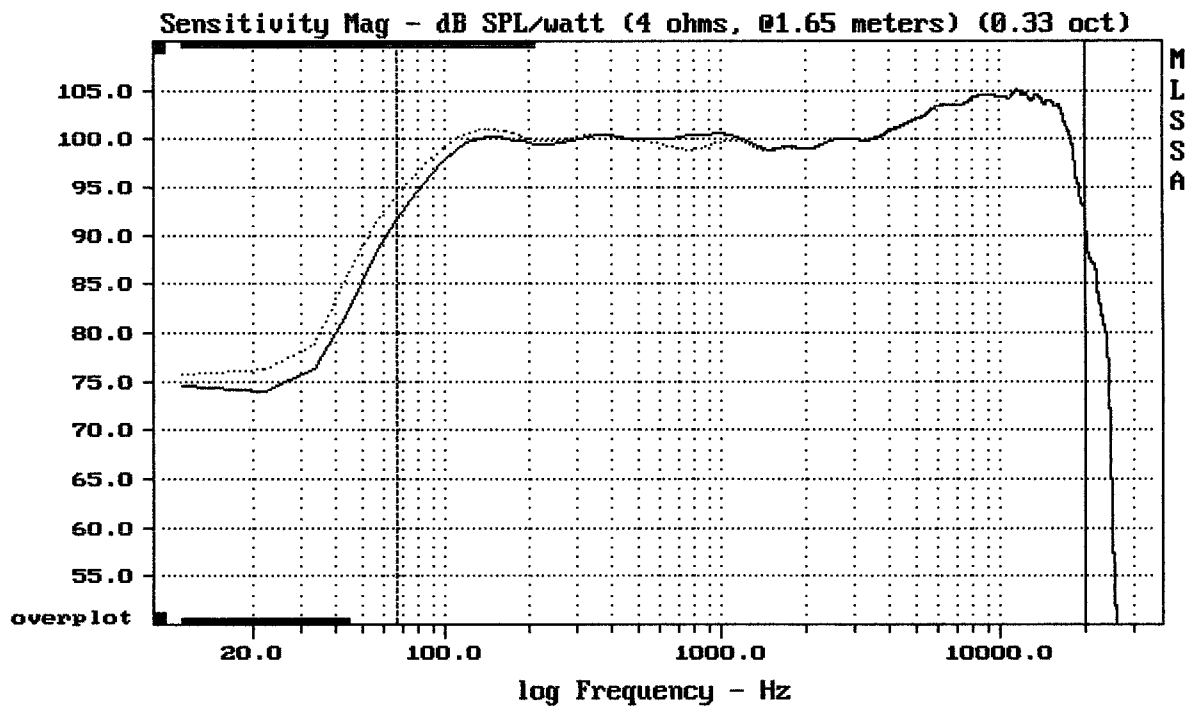

Overlay Compare: dev= +2.7/-1.4, std= 0.21, avg= -0.051


ART725-A MK II

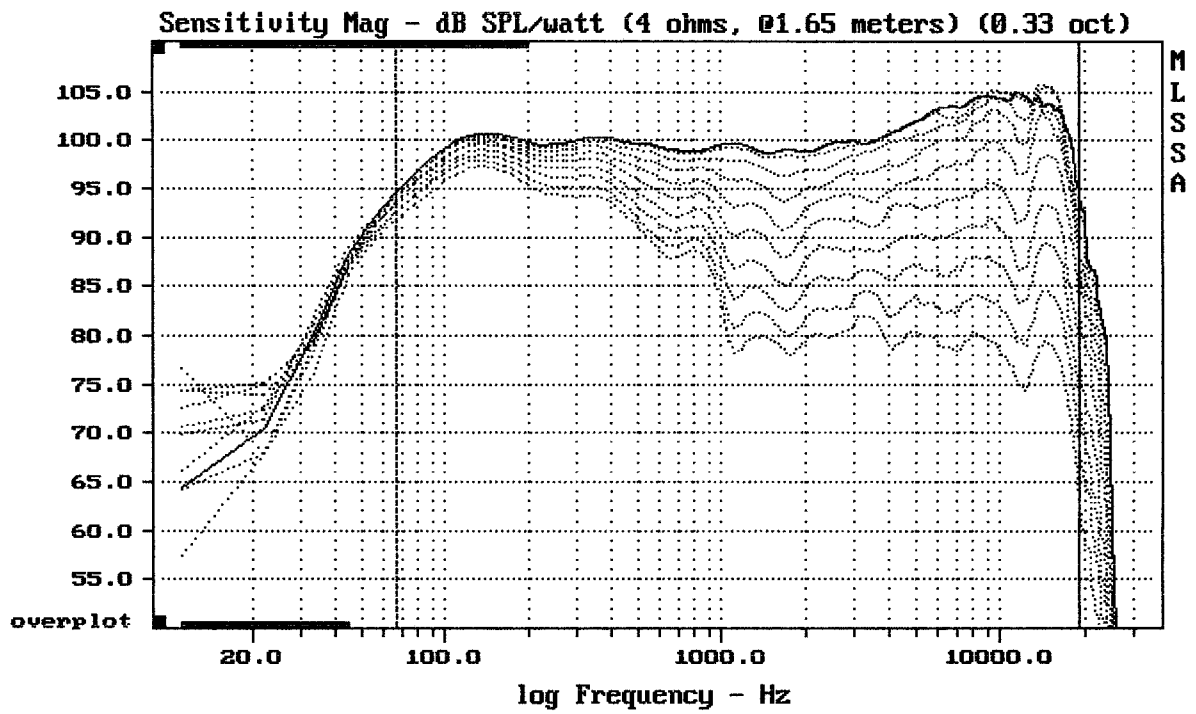

Overlay Compare: dev= +21/-7.7, std= 4.8, avg= -24


ART725-A MK II

MLSSA: Frequency Domain

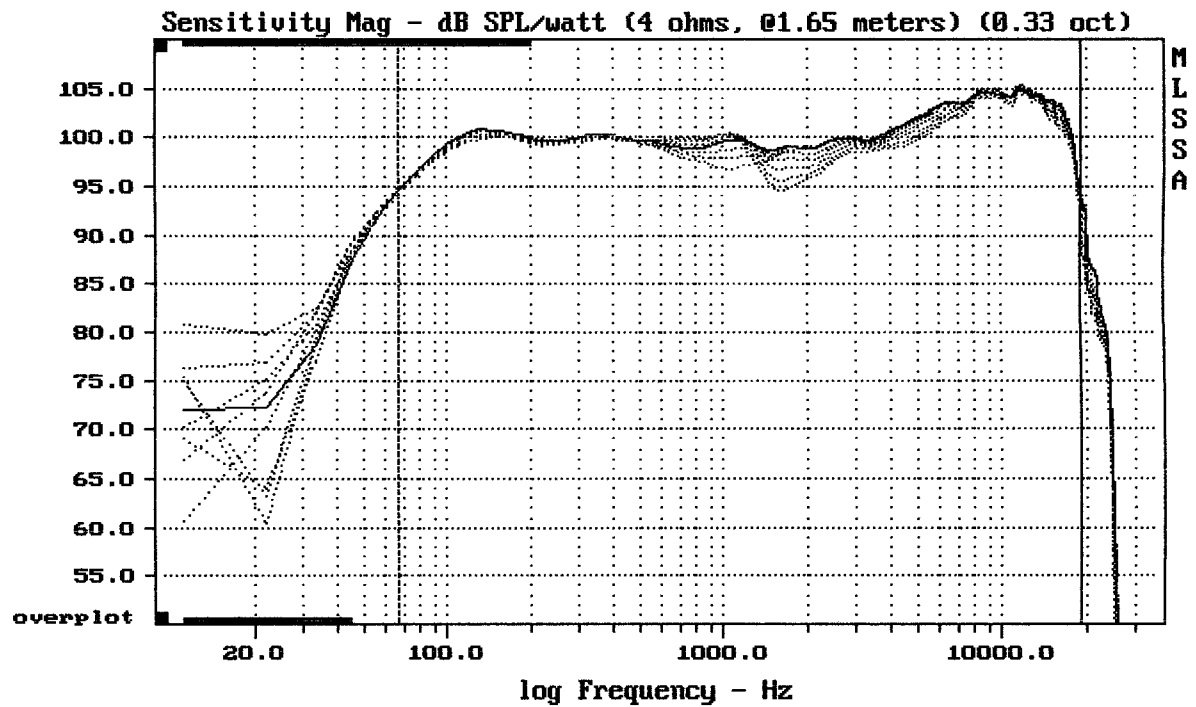

CURSOR: y = 91.1053 x = 19309.3034 (1740)


ART725-A MK II

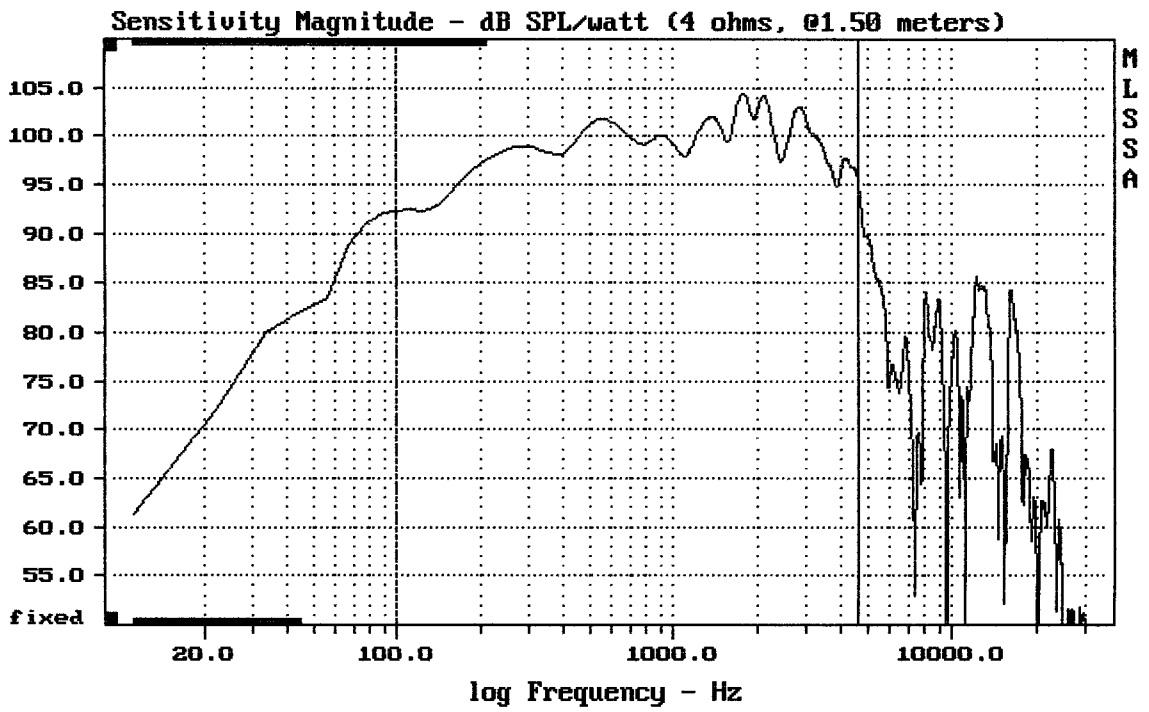

Level (100:4605 Hz) = 99.54 dB SPL/watt (4 ohms, @1.50 meters)

ART725-A MK II

MLSSA: Frequency Domain

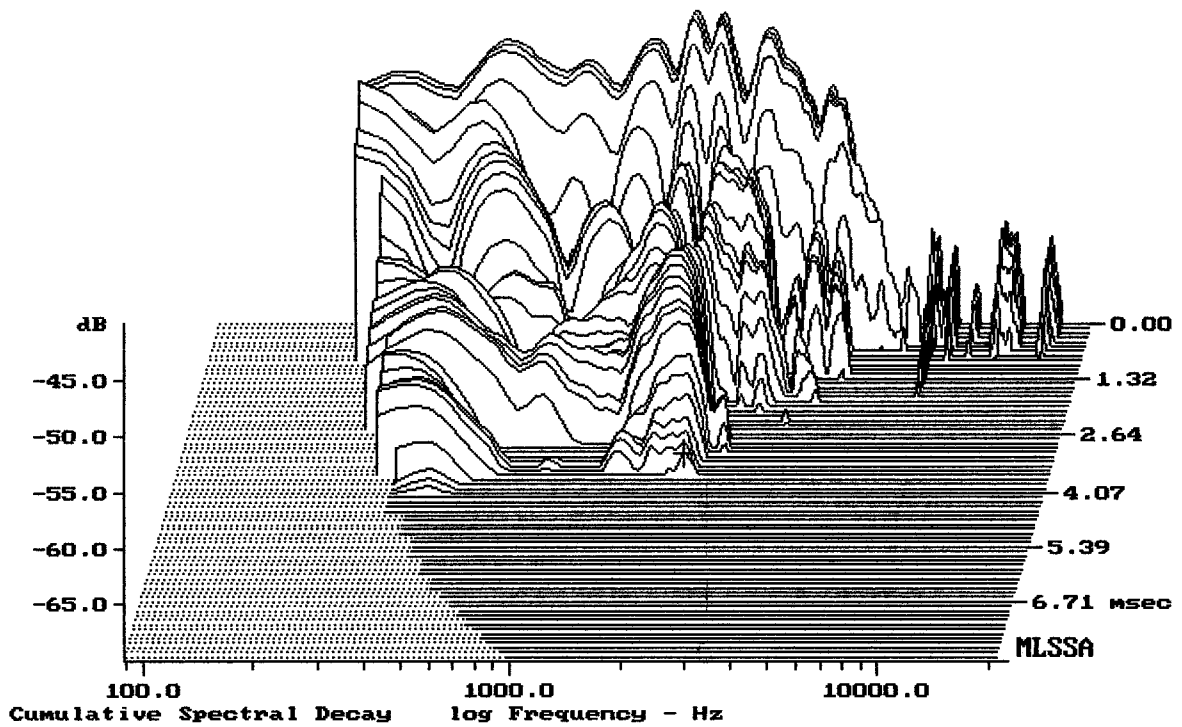

-68.06 dB, 2131 Hz (48), 3.630 msec (34)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.32	Ohms
2	Fs	66.58	Hz
3	Re	2.80	Ohms[dc]
4	Res	19.81	Ohms
5	Qms	2.99	
6	Qes	0.42	
7	Qts	0.37	
8	L1	0.30	mH
9	L2	0.71	mH
10	R2	2.73	Ohms
11	RMSE-load	0.18	Ohms
12	Vas(Sd)	89.99	liters
13	Mms	69.29	grams
14	Cms	82	$\mu\text{M}/\text{Newton}$
15	B1	13.85	Tesla-M
16	SPLref(Sd)	99.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.1% (-20% to -50% is recommended).

ART725-A MK II

MLSSA: Parameters

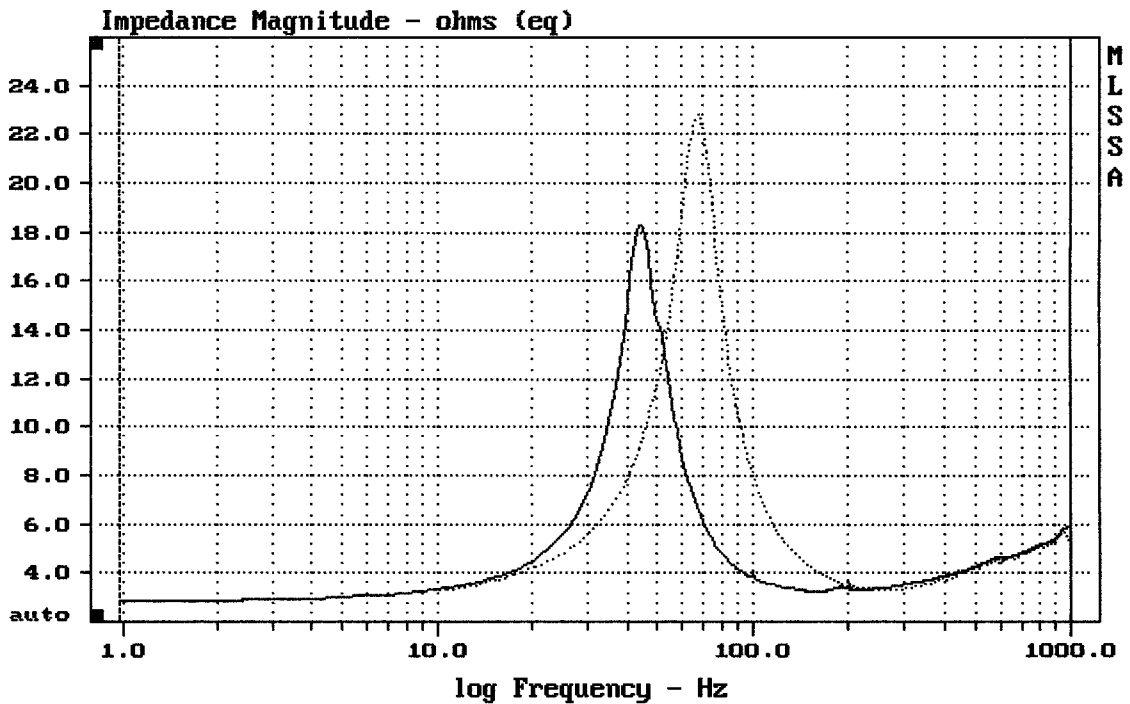

mean: 5.067, rms: 5.774, std: 2.768, max: 22.81, min: 2.876

MLSSA: Frequency Domain