


mean: 99.29, rms: 99.81, std: 2.64, max: 103.67, min: 90.26


db TECHNOLOGIES CROMO 10+

MLSSA: Frequency Domain

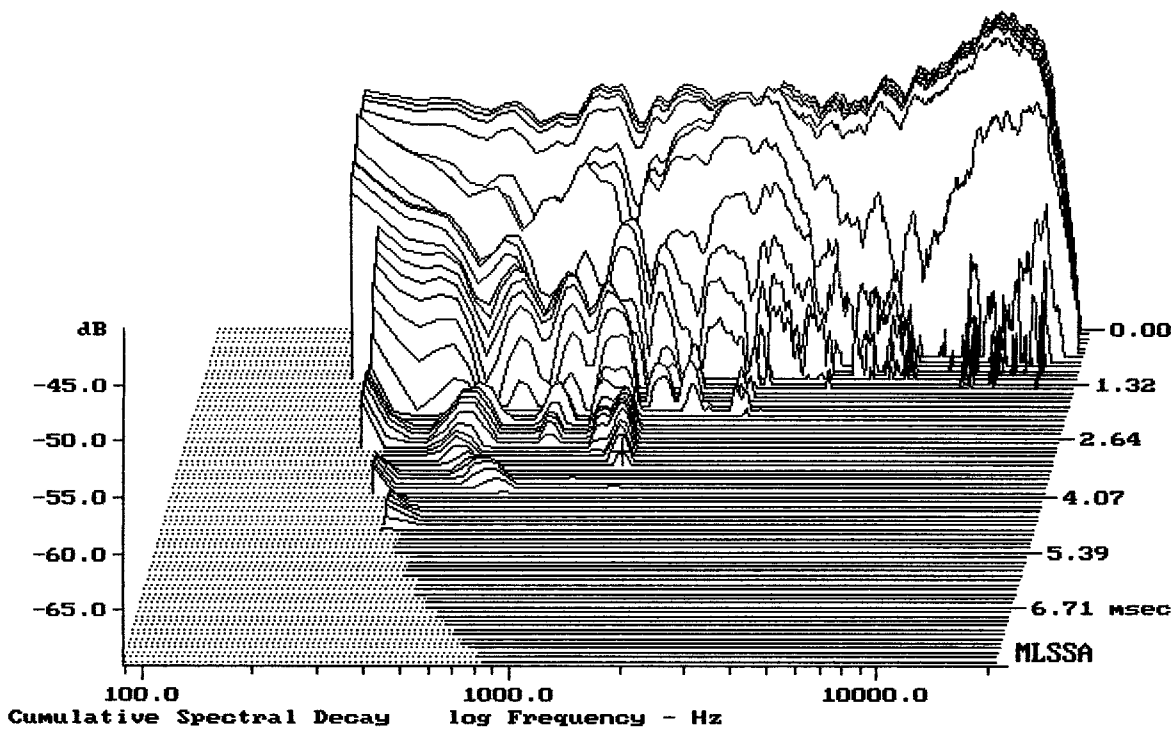

-68.79 dB, 1420 Hz (32), 3.300 msec (31)


DTTO

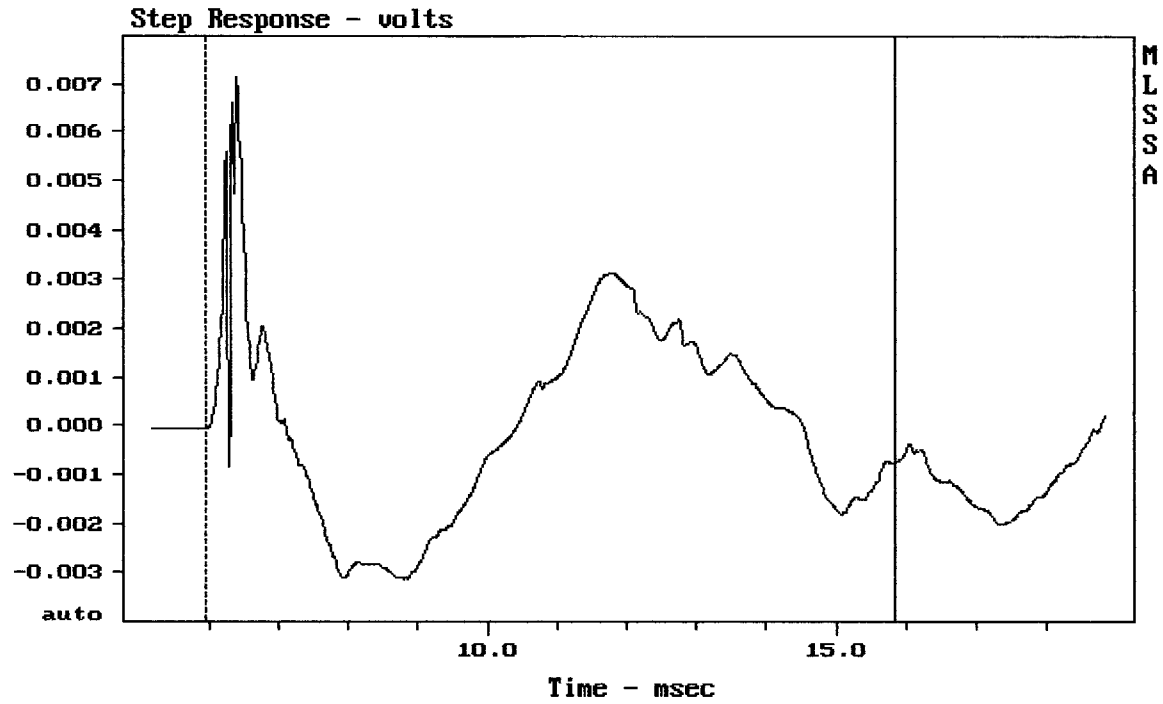

mean: 3.966e-005, rms: 0.002001, std: 0.002001, max: 0.007151, min: -0.003126

db TECHNOLOGIES CROMO 10+


MLSSA: Time Domain

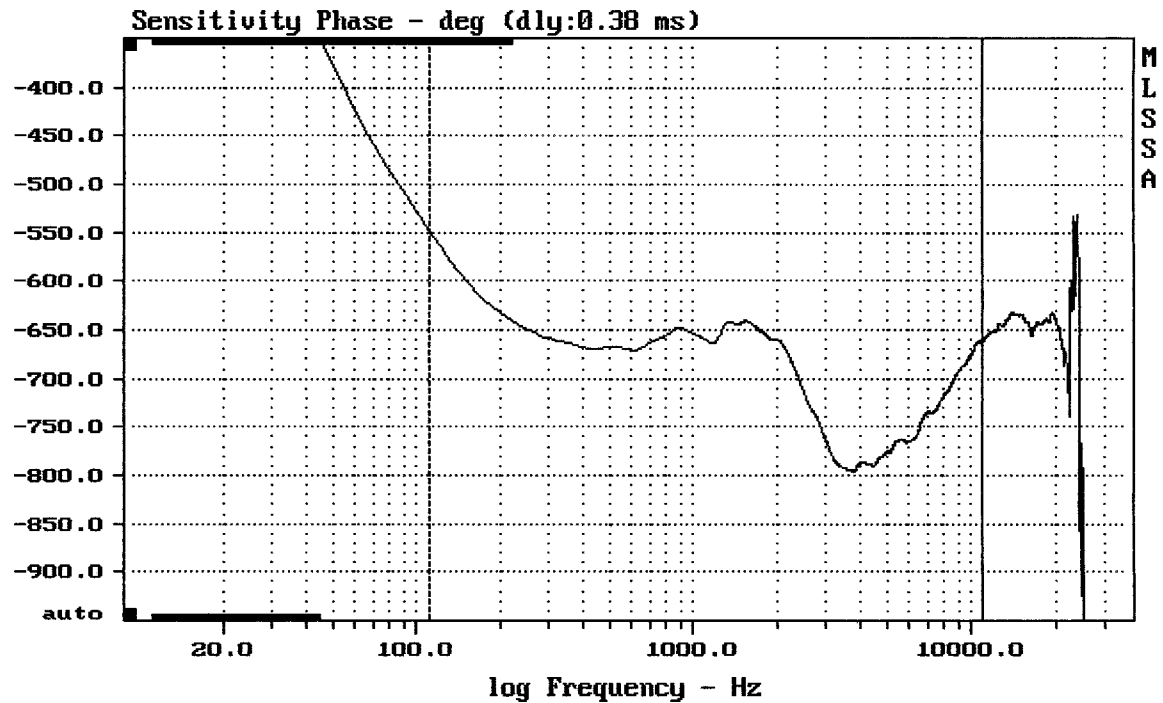

mean: -718, rms: 719.8, std: 49.89, max: -547.7, min: -795.4

db TECHNOLOGIES CROMO 10+


MLSSA: Frequency Domain

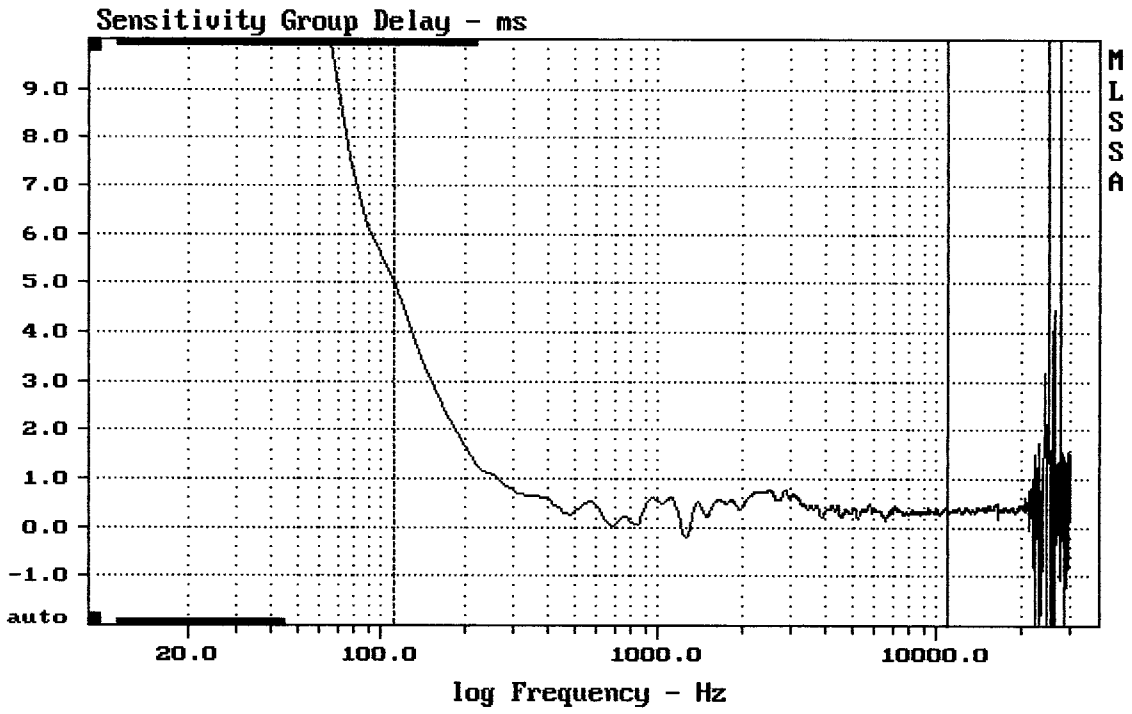

mean: 0.4118, rms: 0.5205, std: 0.3183, max: 5.045, min: -0.2176

db TECHNOLOGIES CROMO 10+


MLSSA: Frequency Domain

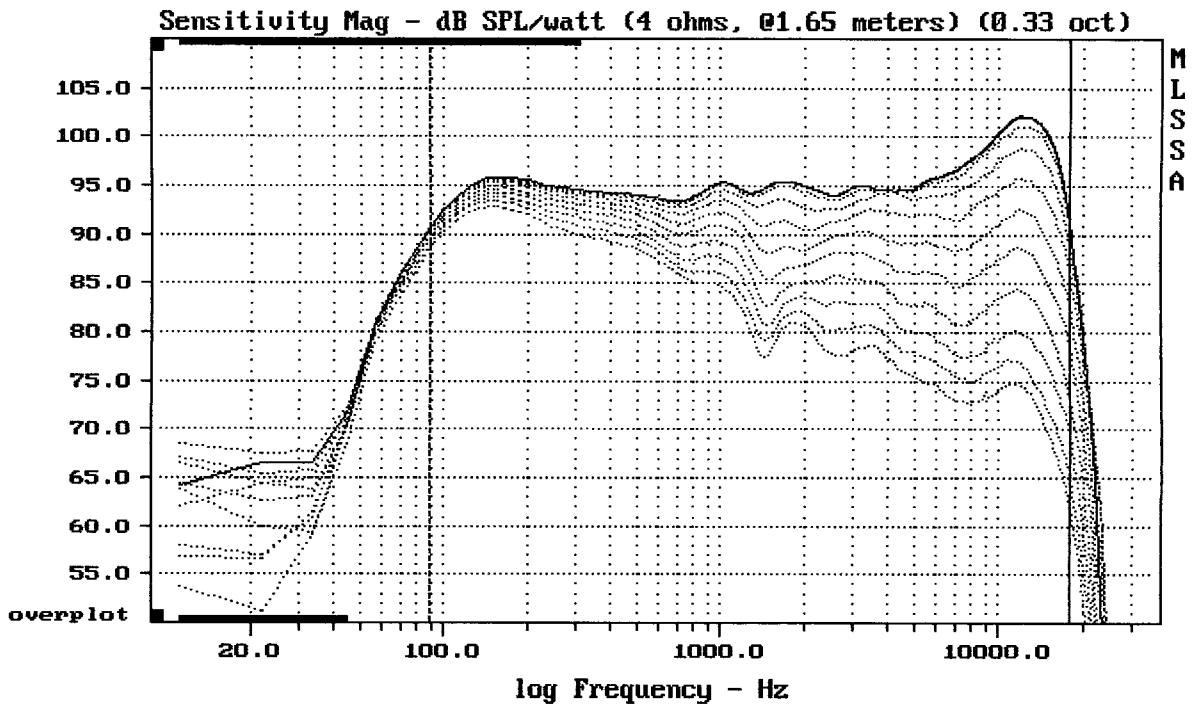

Overlay Compare: dev= +21/-7.5, std= 6.6, avg= -24

db TECHNOLOGIES CROMO 10+


MLSSA: Frequency Domain

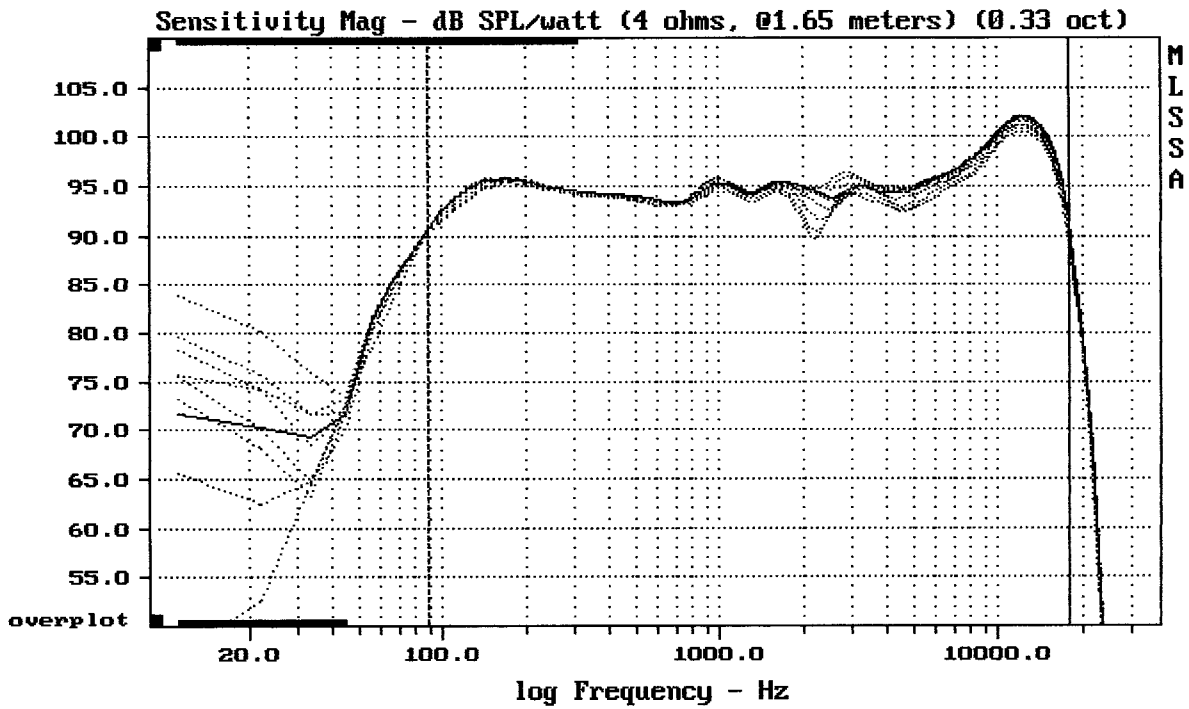

mean: 96.55, rms: 97.04, std: 2.57, max: 100.54, min: 89.04

db TECHNOLOGIES CROMO 10+


MLSSA: Frequency Domain

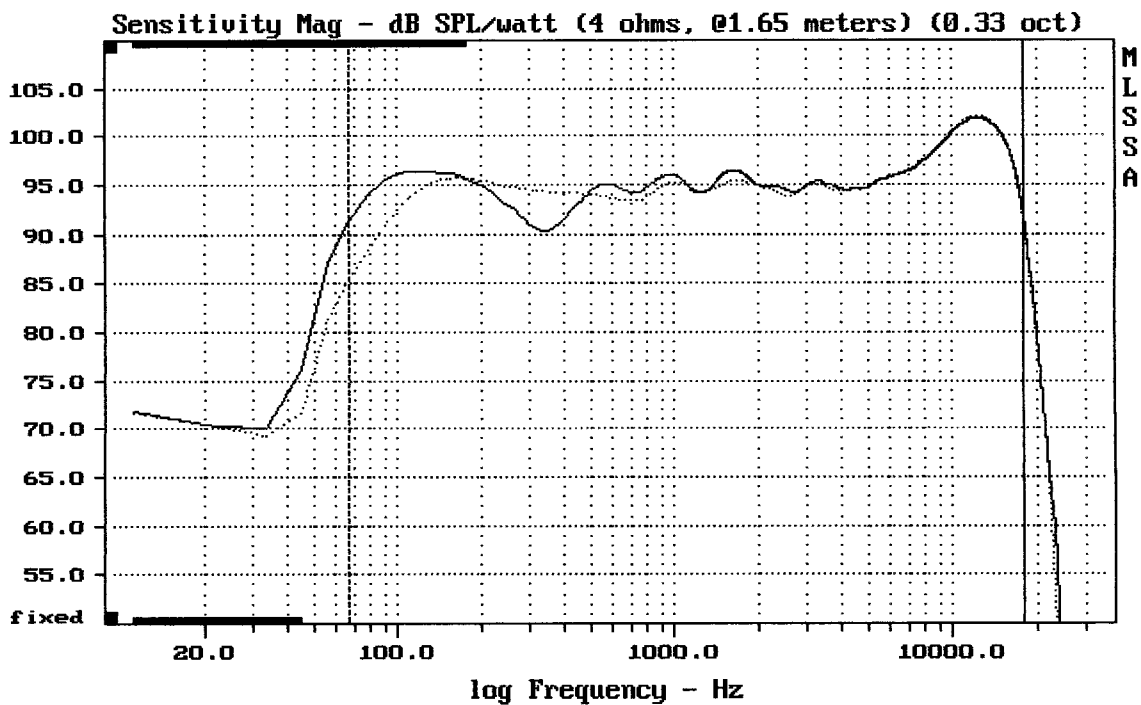

Overlay Compare: dev= +5.9/-4.1, std= 0.51, avg= 0.056

DTTO FLOOR —


MLSSA: Frequency Domain

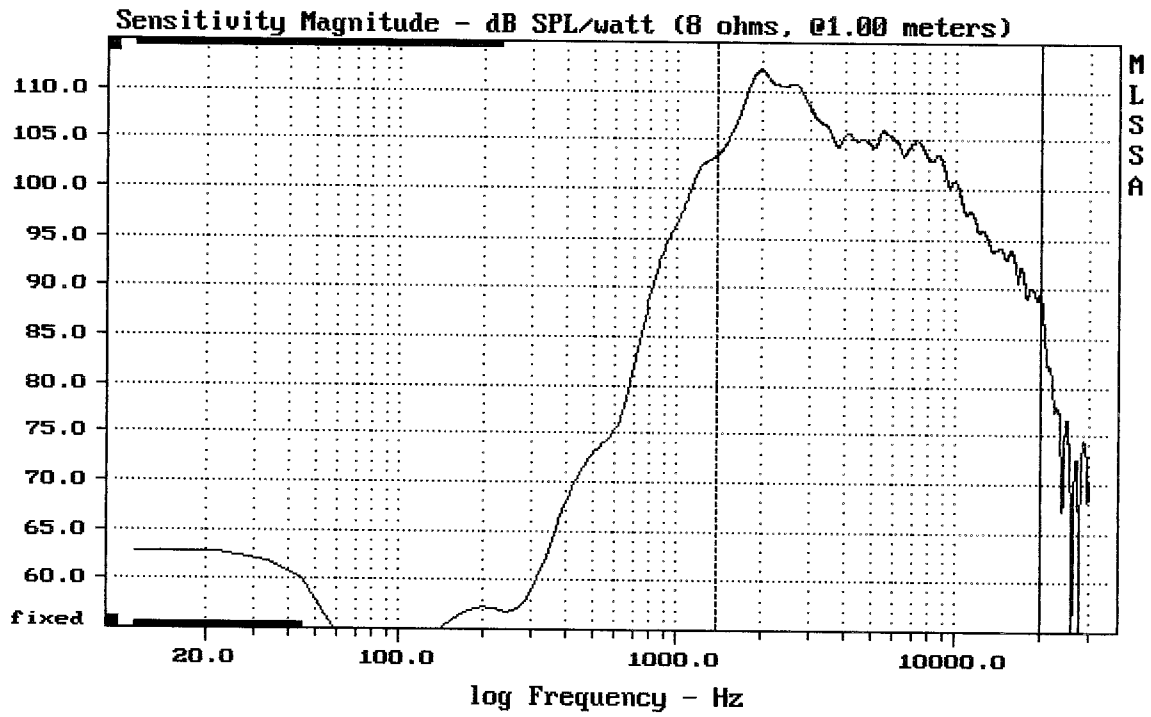

Level (1398:20000 Hz) = 106.29 dB SPL/watt (8 ohms, @1.00 meters)


1" FROM CROMO 10+ + A7570

MLSSA: Frequency Domain

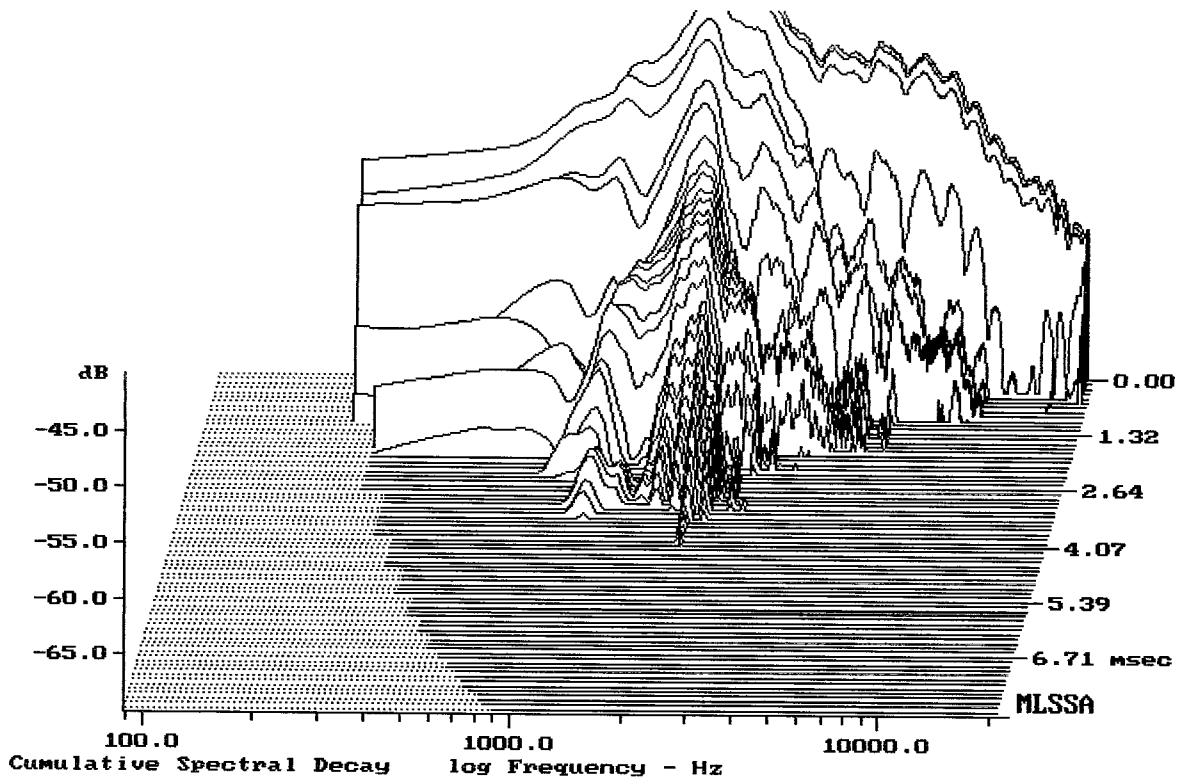

-69.57 dB, 2086 Hz (47), 3.850 msec (36)


DTTO

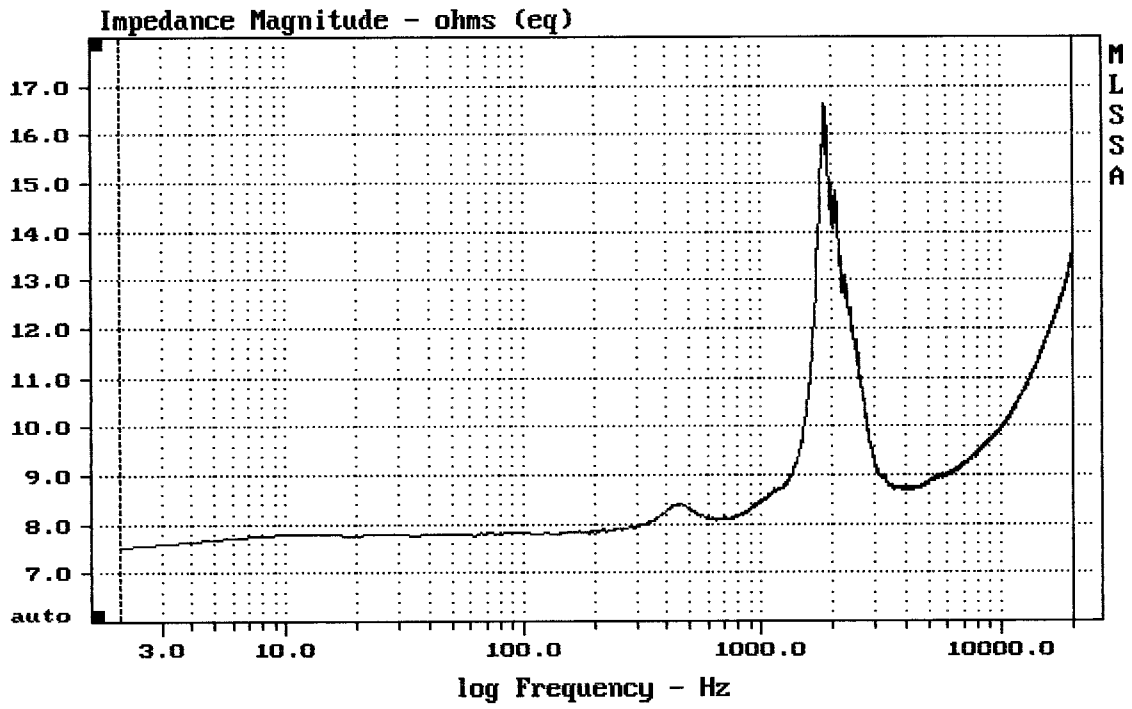

mean: 10.58, rms: 10.71, std: 1.637, max: 16.63, min: 7.524

AEB TW-01-08-25 FROM CROMO 10+


MLSSA: Frequency Domain

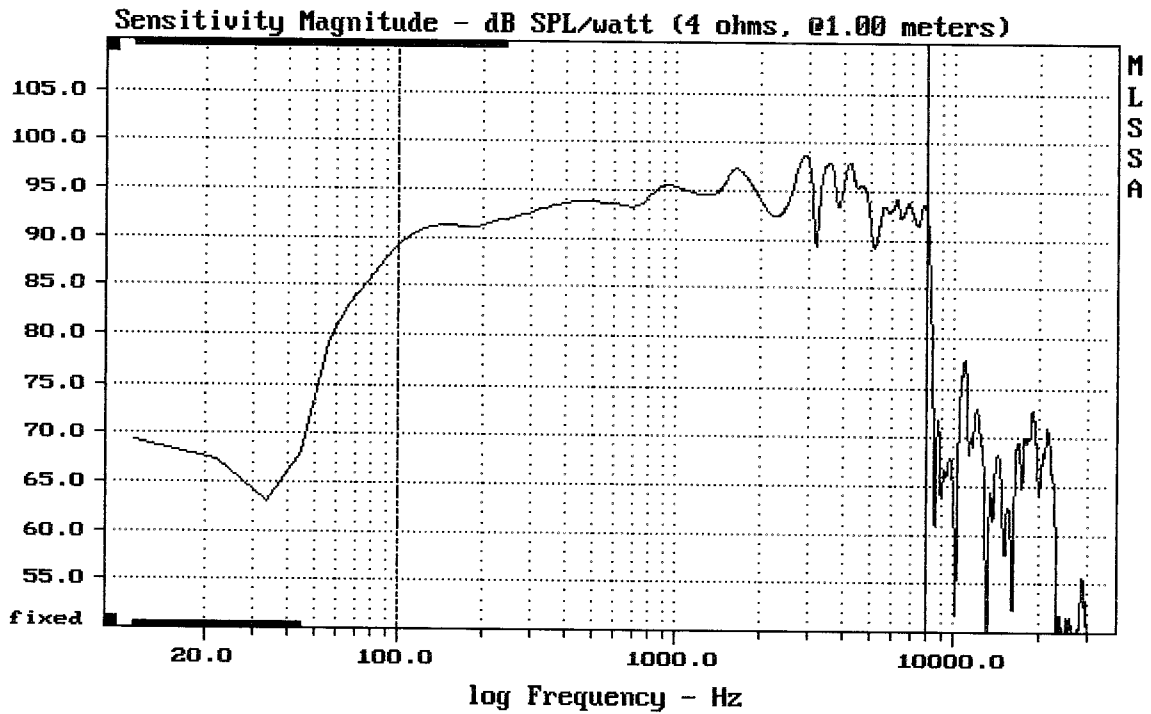

Level (100:8001 Hz) = 94.04 dB SPL/watt (4 ohms, @1.00 meters)

10" FROM CROMO 10+

MLSSA: Frequency Domain

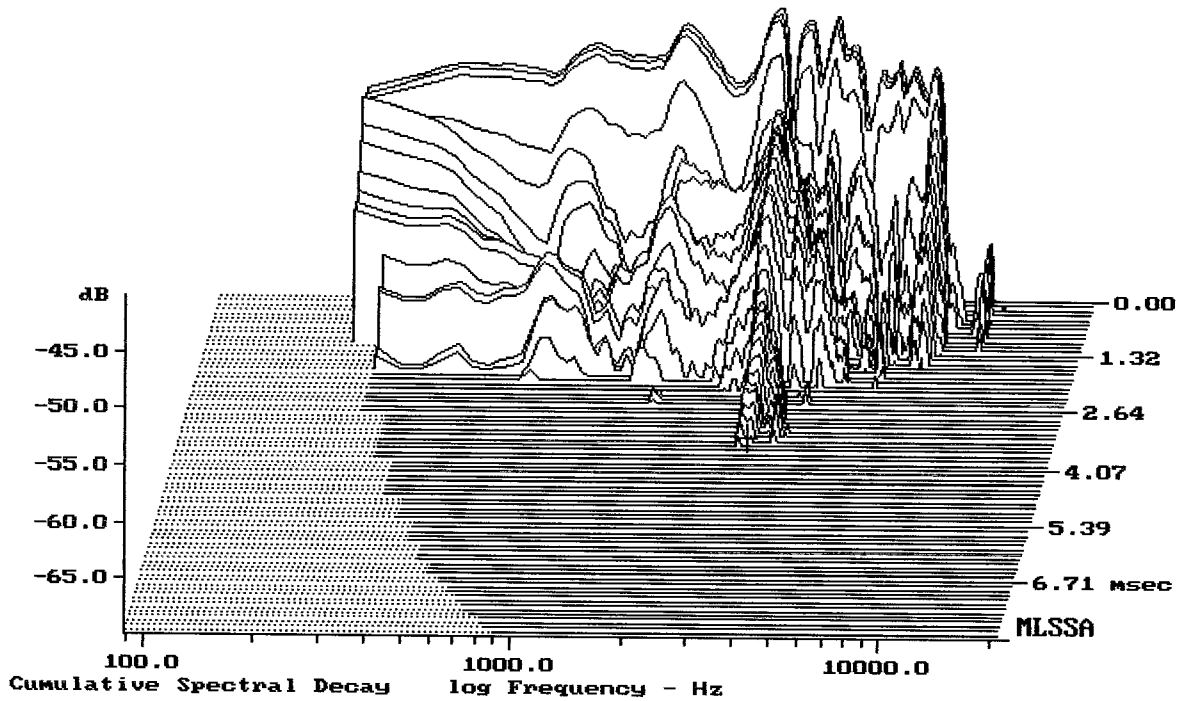

-69.72 dB, 3107 Hz (70), 3.410 msec (32)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.27	Ohms
2	Fs	73.59	Hz
3	Re	3.31	Ohms[dc]
4	Res	13.81	Ohms
5	Qms	2.59	
6	Qes	0.62	
7	Qts	0.50	
8	L1	0.23	mH
9	L2	0.50	mH
10	R2	1.81	Ohms
11	RMSE-load	0.18	Ohms
12	Vas(Sd)	44.56	liters
13	Mms	19.43	grams
14	Cms	241	$\mu\text{M}/\text{Newton}$
15	B1	6.92	Tesla-M
16	SPLref(Sd)	96.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 363.05 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.8% (-20% to -50% is recommended).

10" AEB-W-10-04-38-KK FROM CROMO 10+

MLSSA: Parameters

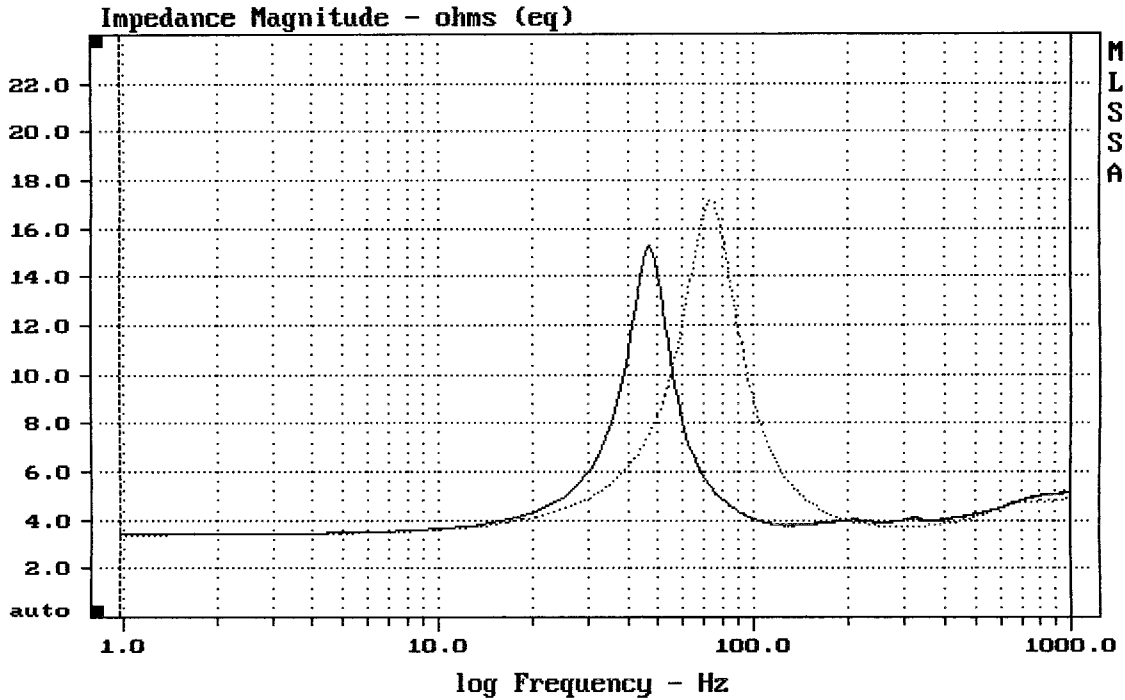

mean: 4.922, rms: 5.348, std: 2.092, max: 17.22, min: 3.38

MLSSA: Frequency Domain