


**E-shop:**

RCF ACUSTICA S8015


<http://eshop.prodance.cz/acustica-s8015/d-92783/>

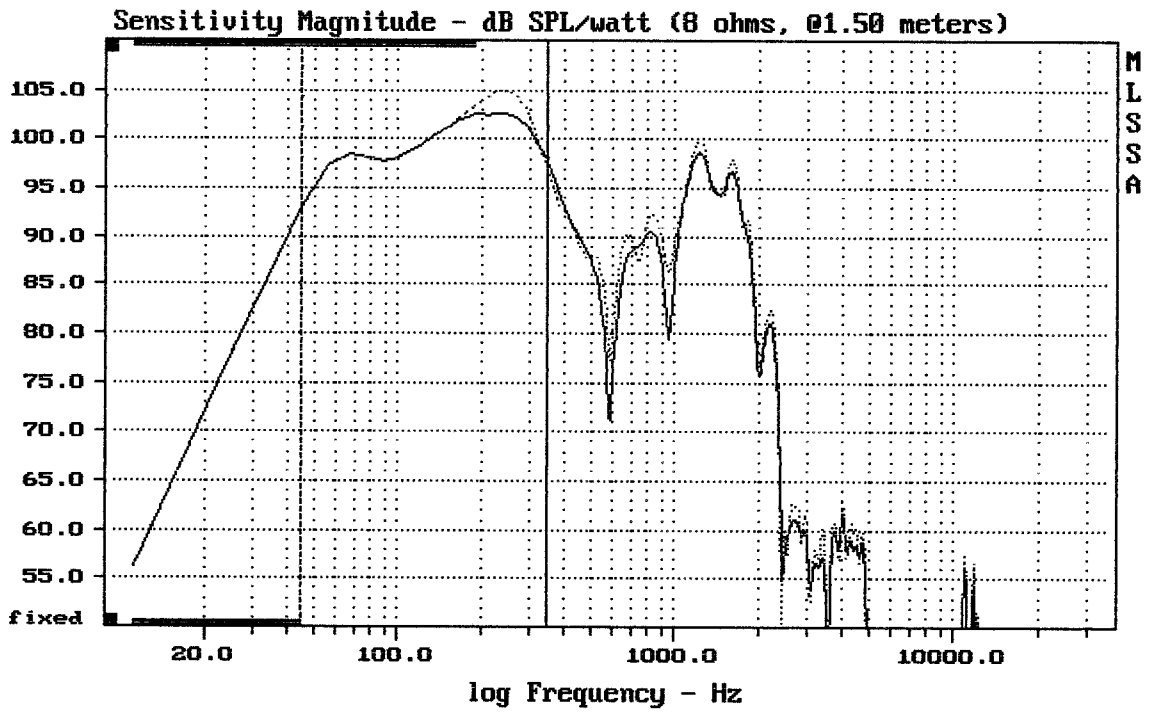

Level (44:344 Hz) = 100.77 dB SPL/watt (8 ohms, @1.50 meters)


RCF S8015

MLSSA: Frequency Domain

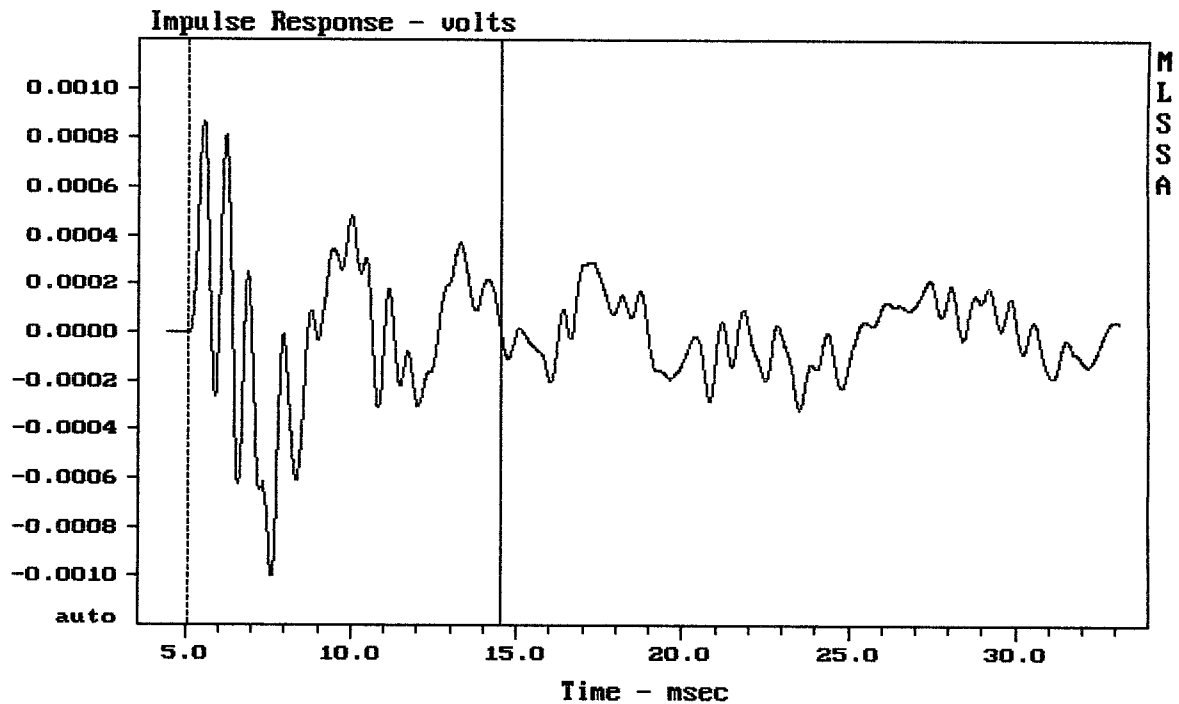

mean: 1.061e-005, rms: 0.0003587, std: 0.0003586, max: 0.0008654, min: -0.0009


RCF S8015

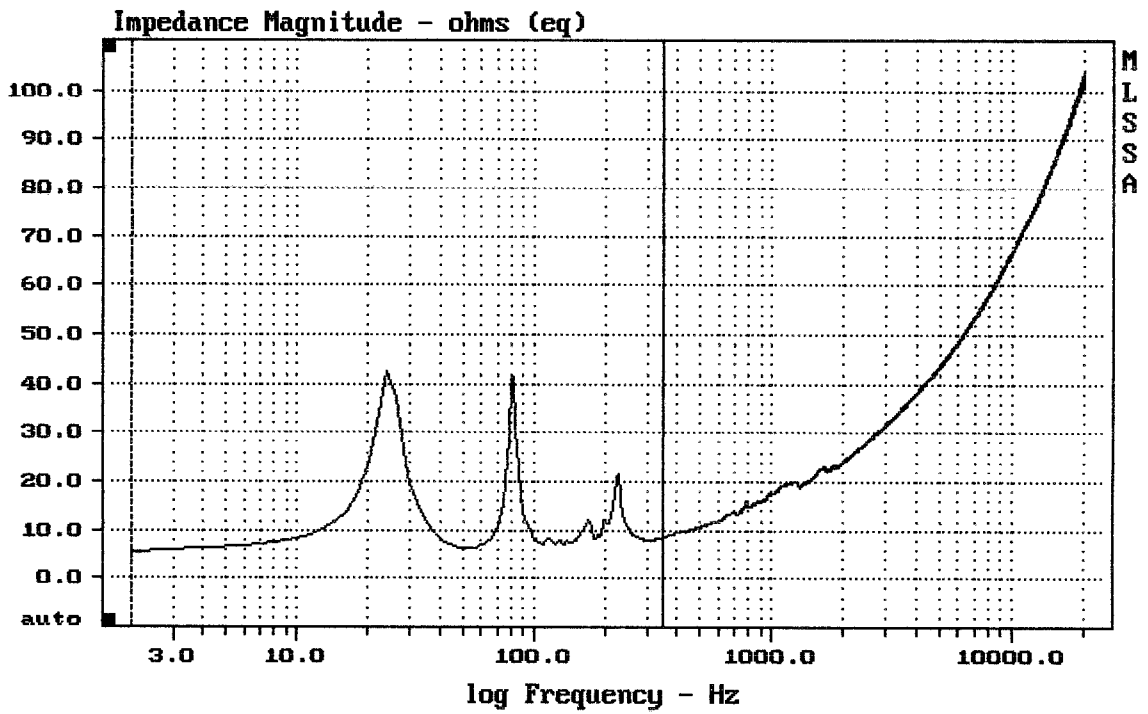


mean: 11.21, rms: 12.94, std: 6.453, max: 42.46, min: 5.71

RCF S8015

MLSSA: Frequency Domain

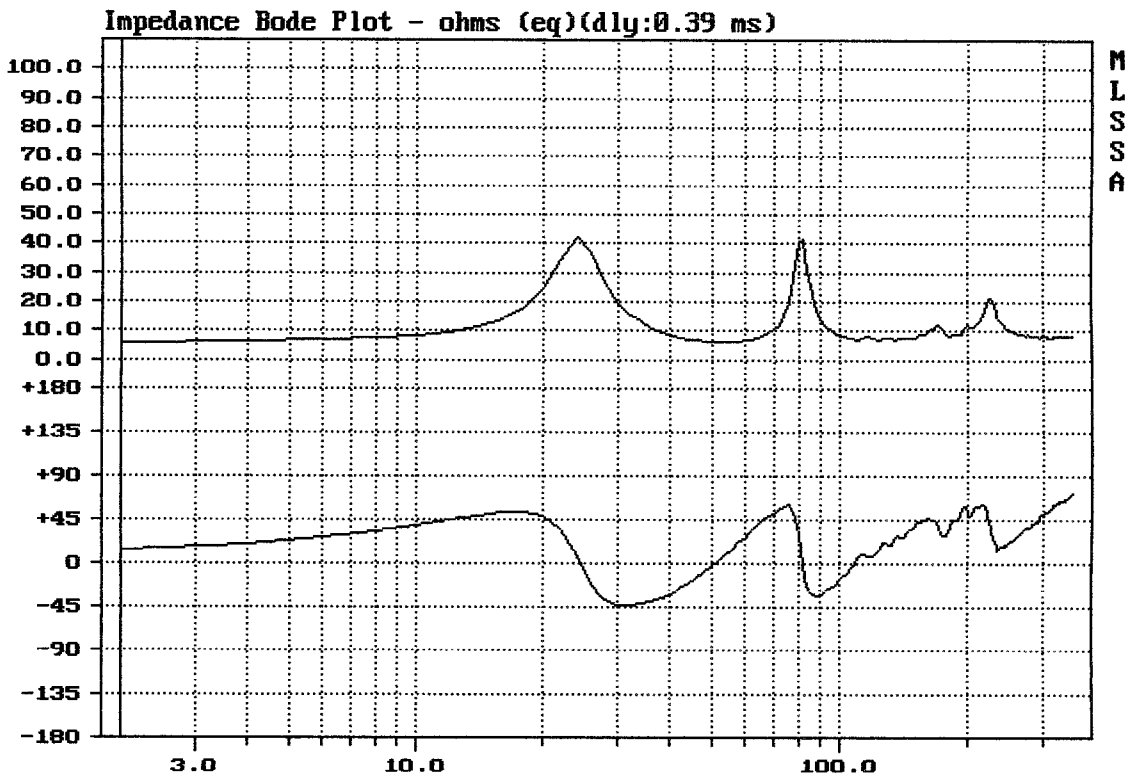

mag= 5.71, phase= 14.6 deg, 2.001 Hz (1)

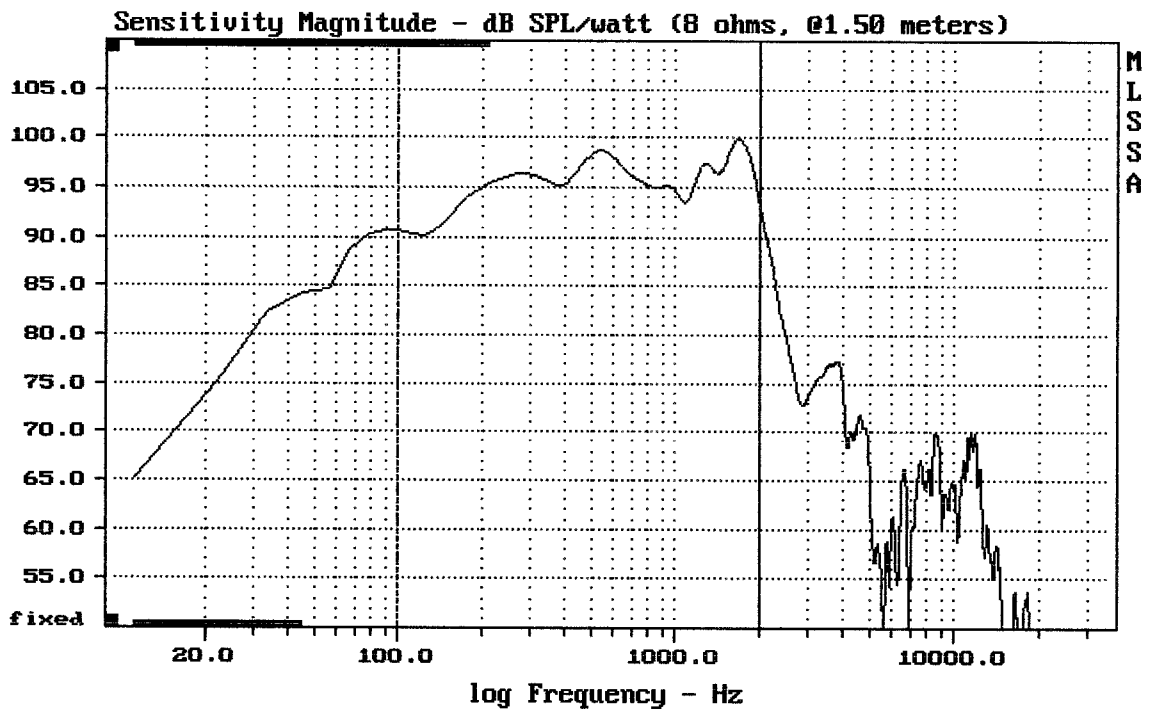



---

Level (100:1998 Hz) = 95.87 dB SPL/watt (8 ohms, @1.50 meters)

---

15" S8015

MLSSA: Frequency Domain

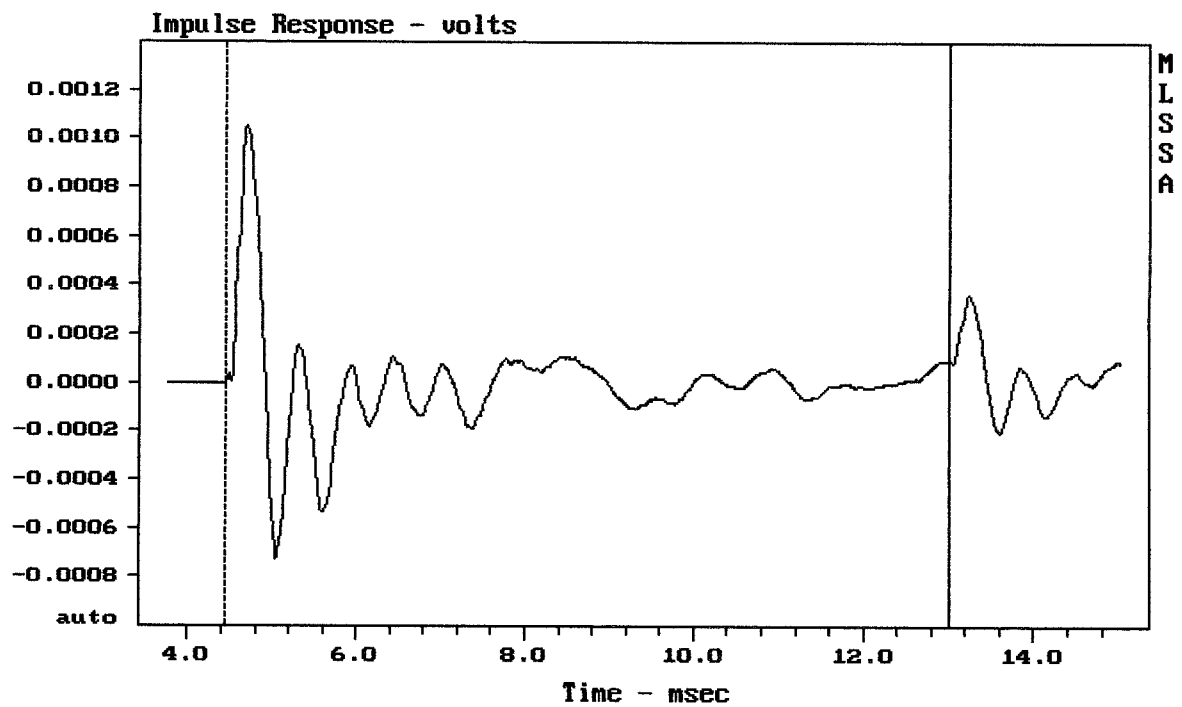


---

mean:  $-4.452e-006$ , rms: 0.0002072, std: 0.0002072, max: 0.001052, min: -0.0007

---

15" S8015

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon  
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.52	Ohms
2	Fs	42.52	Hz
3	Re	5.07	Ohms[dc]
4	Res	65.96	Ohms
5	Qms	3.72	
6	Qes	0.29	
7	Qts	0.27	
8	L1	1.23	mH
9	L2	2.23	mH
10	R2	10.00	Ohms
11	RMSE-load	0.40	Ohms
12	Vas(Sd)	111.82	liters
13	Mms	145.06	grams
14	Cms	97	$\mu$ M/Newton
15	B1	26.21	Tesla-M
16	SPLref(Sd)	96.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 907.92 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -19.7% (-20% to -50% is recommended).

15" FROM RCF S8015

MLSSA: Parameters

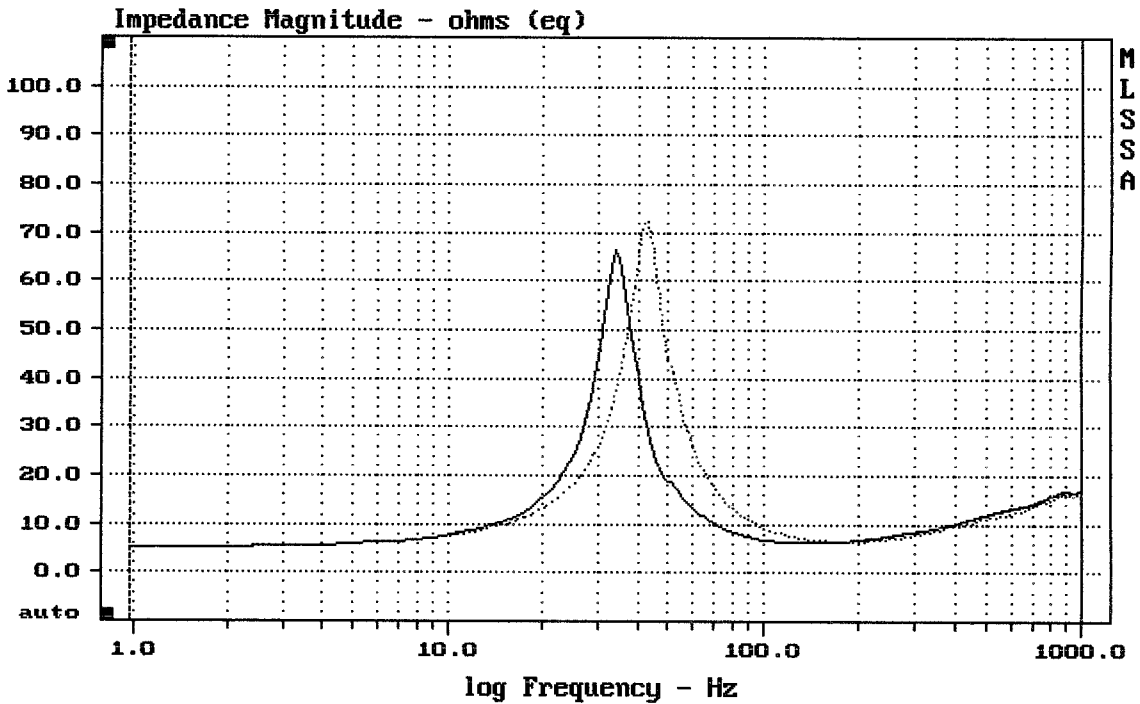

mean: 12.69, rms: 14.62, std: 7.256, max: 72.32, min: 5.186

2-5-93 3:29 PM

MLSSA: Frequency Domain