


E-shop:

EAW – JFX88


<http://eshop.prodance.cz/jfx88/d-81448/>

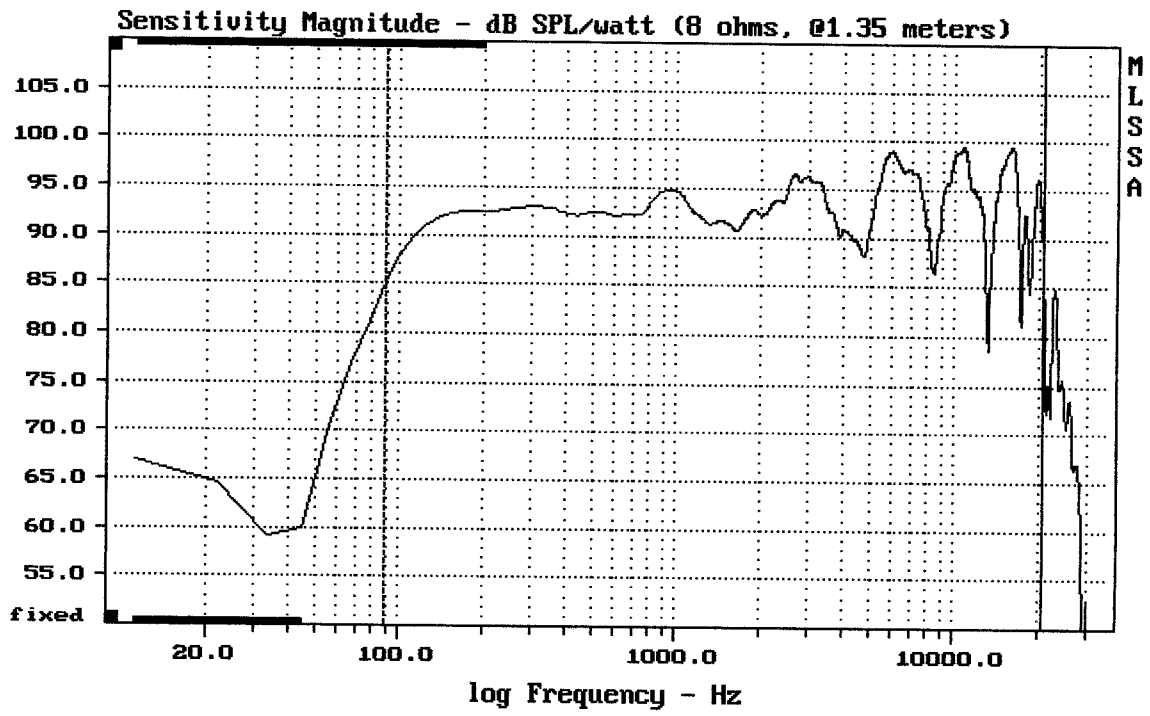

mean: 94.39, rms: 95.09, std: 3.02, max: 99.54, min: 78.59


JFX88

MLSSA: Frequency Domain

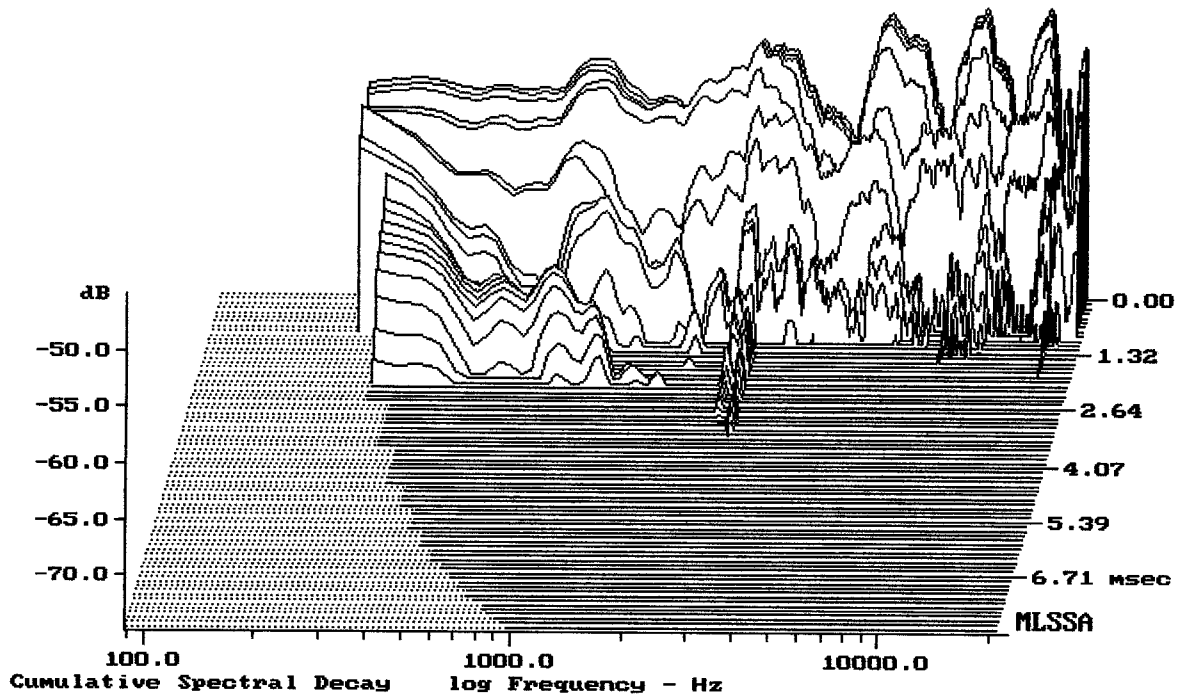

-74.28 dB, 2700 Hz (61), 3.190 msec (30)


DTTO

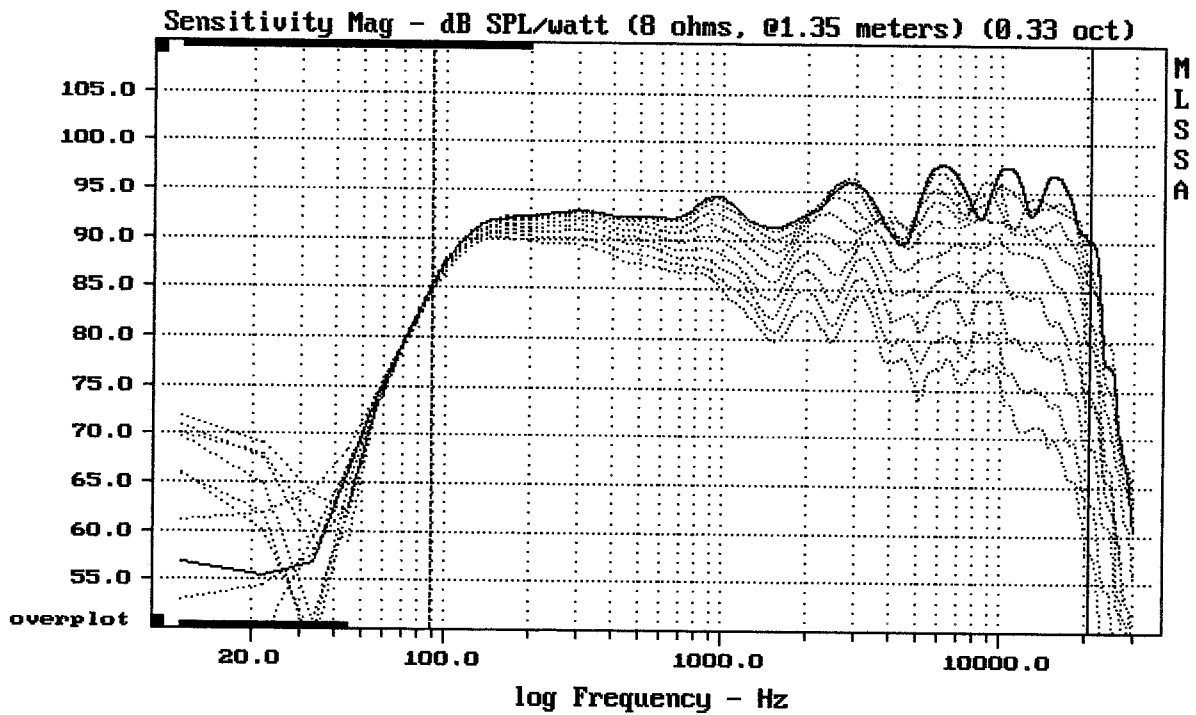

Overlay Compare: dev= +20/-11, std= 6.9, avg= -21

JFX88


MLSSA: Frequency Domain

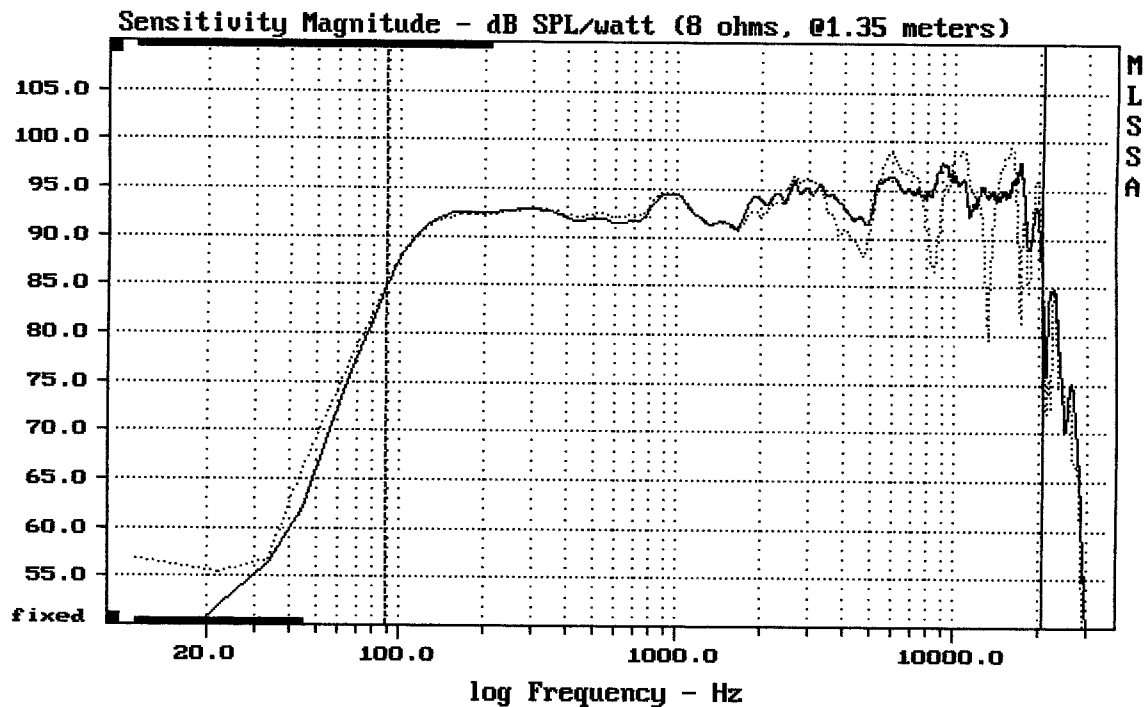

Overlay Compare: dev= +16/-5.3, std= 3.9, avg= 0.79

JFX88


MLSSA: Frequency Domain

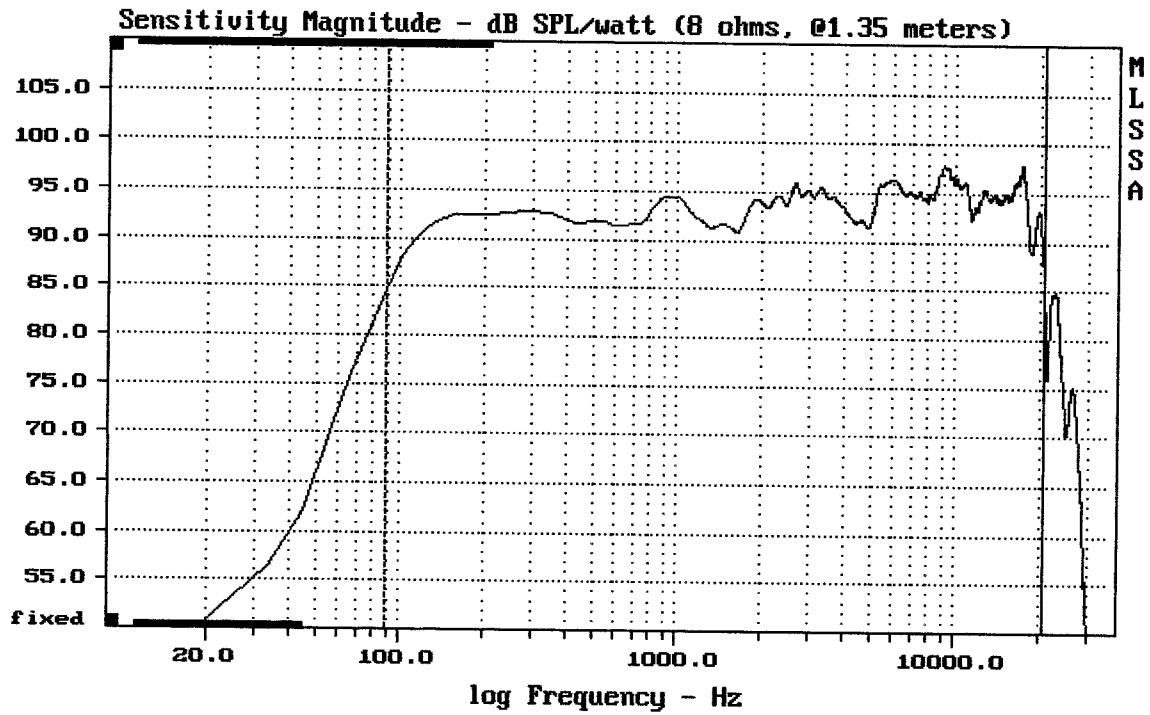

Level (89:20708 Hz) = 93.46 dB SPL/watt (8 ohms, @1.35 meters)


JFX88

MLSSA: Frequency Domain

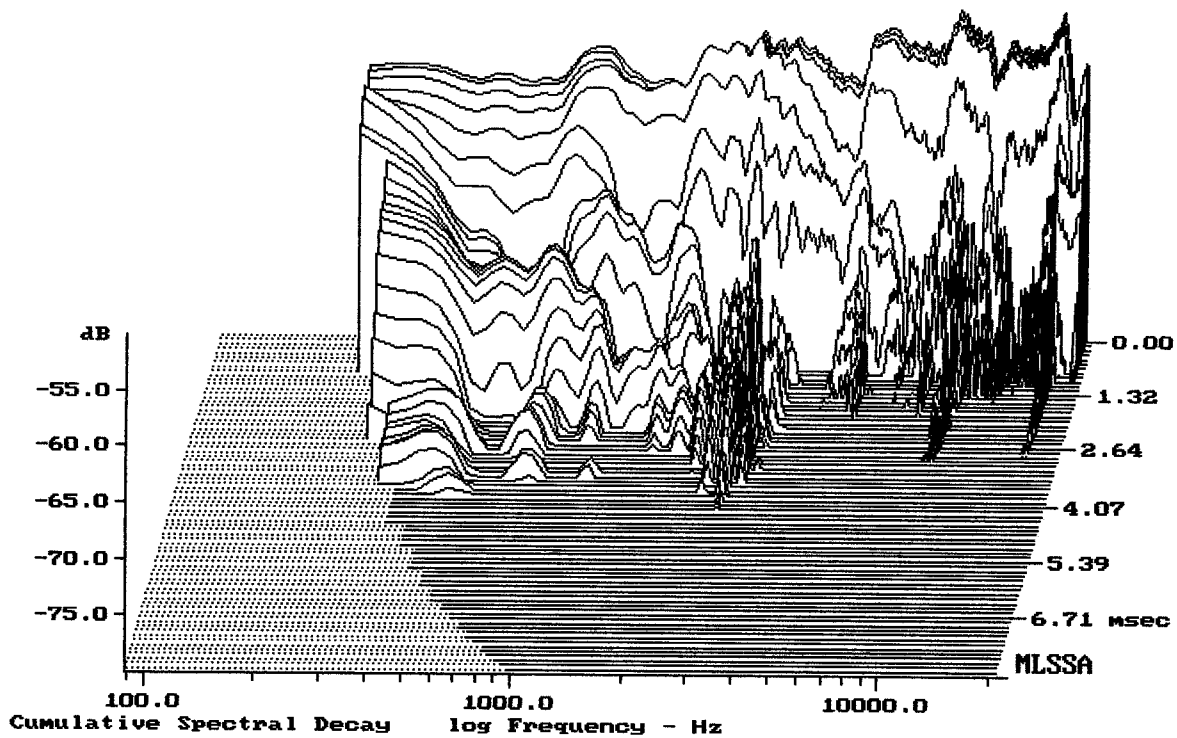

-79.36 dB, 2708 Hz (61), 3.960 msec (37)


DTTO

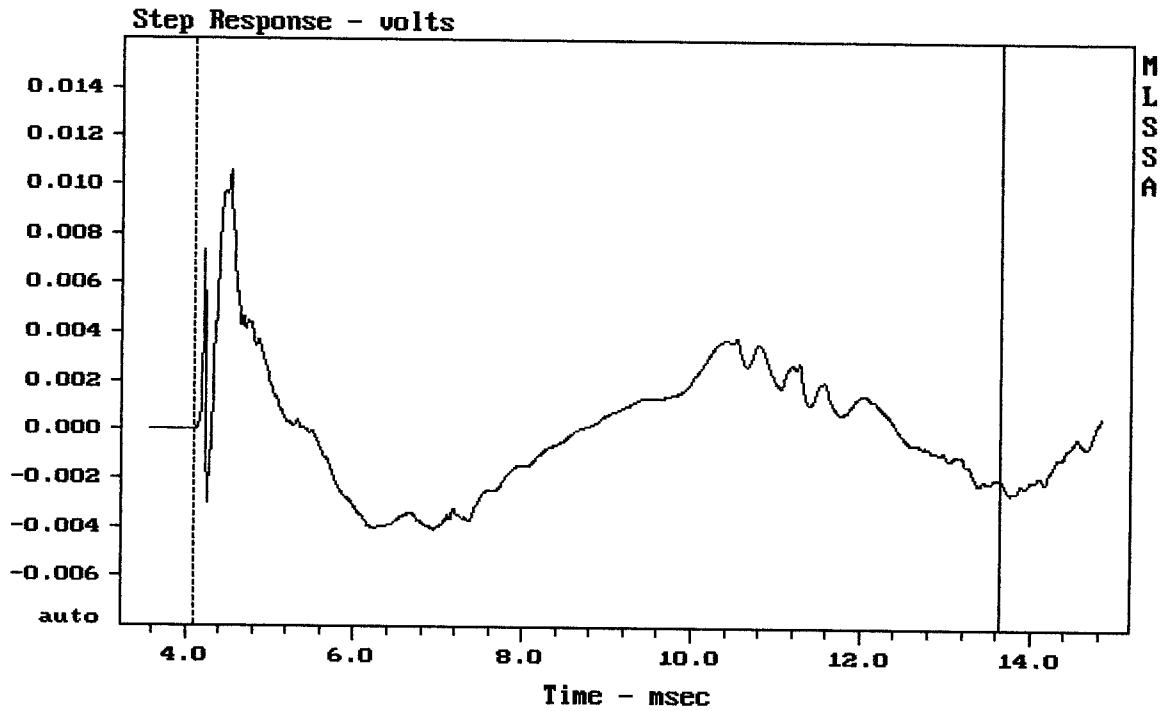

mean: 0.0001543, rms: 0.002691, std: 0.002686, max: 0.01053, min: -0.004071

JFX88


MLSSA: Time Domain

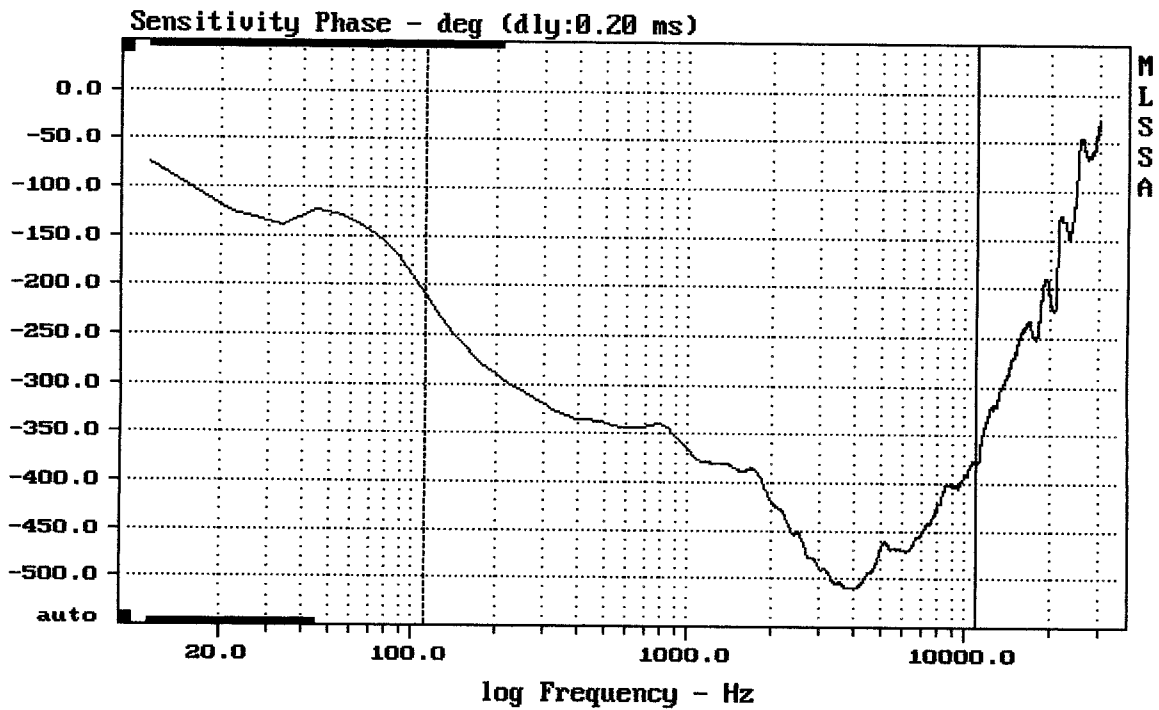

mean: -431.3, rms: 434.3, std: 51.42, max: -209, min: -510.2


JFX88

MLSSA: Frequency Domain

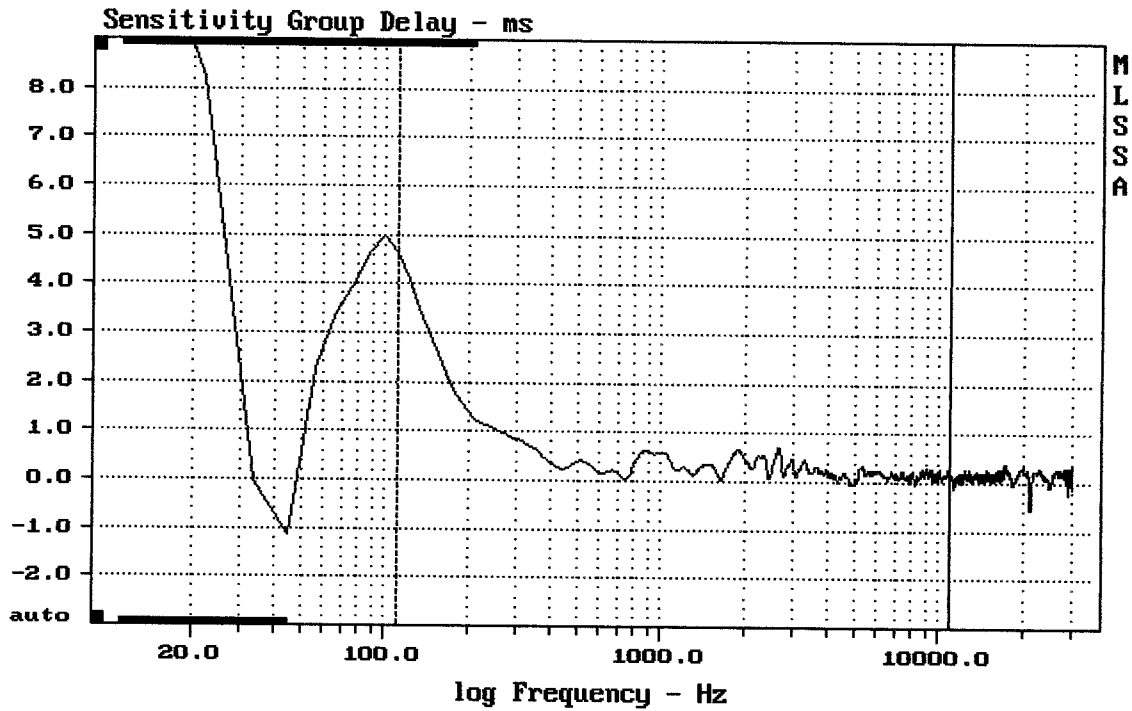


JFX88

MLSSA: Frequency Domain

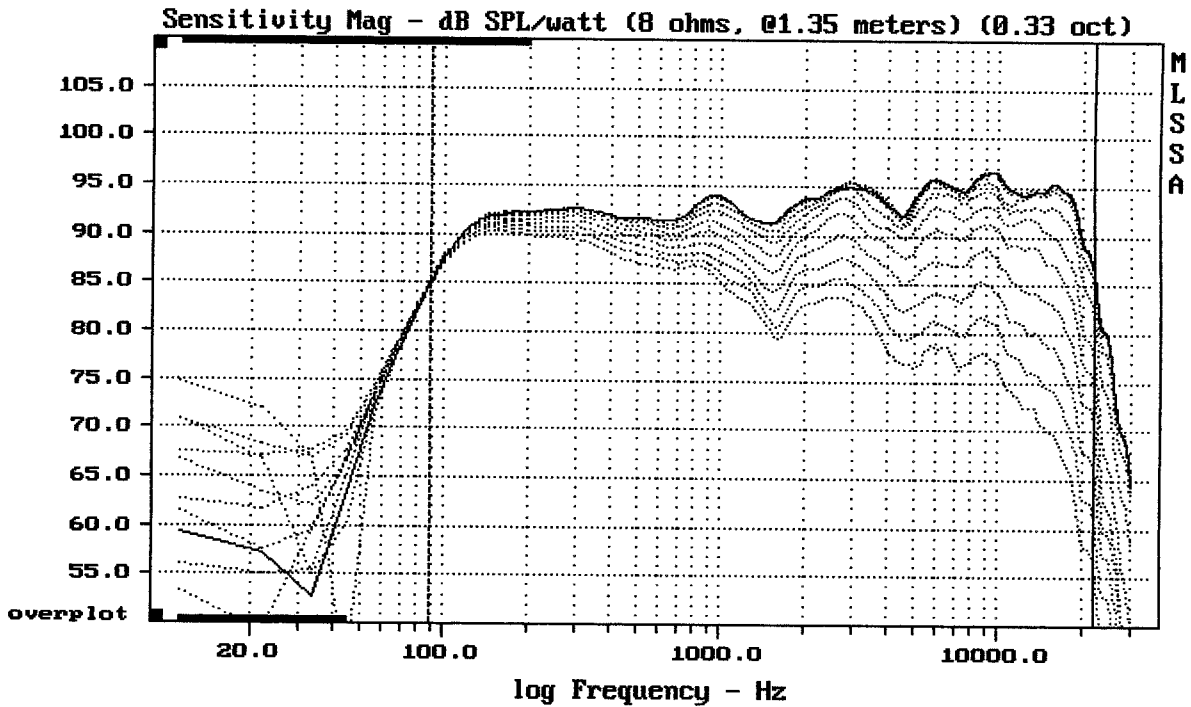

JFX88


MLSSA: Frequency Domain

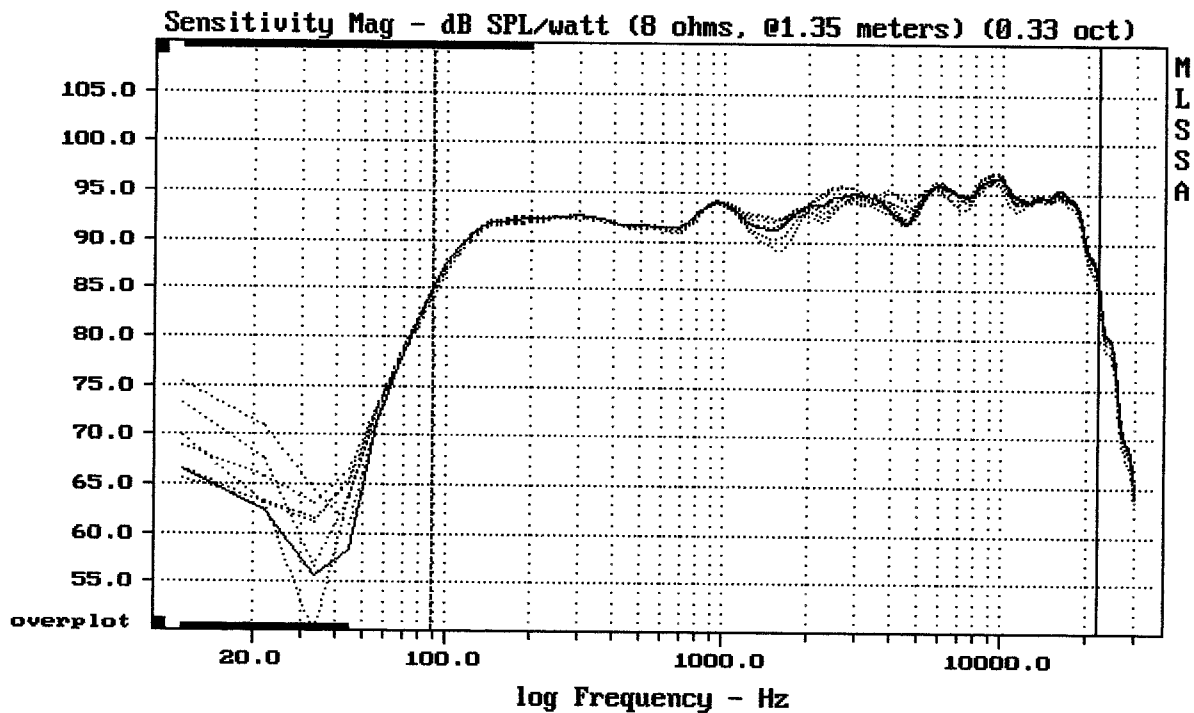

mean: 93.49, rms: 93.72, std: 1.84, max: 96.37, min: 84.12

JFX88


MLSSA: Frequency Domain

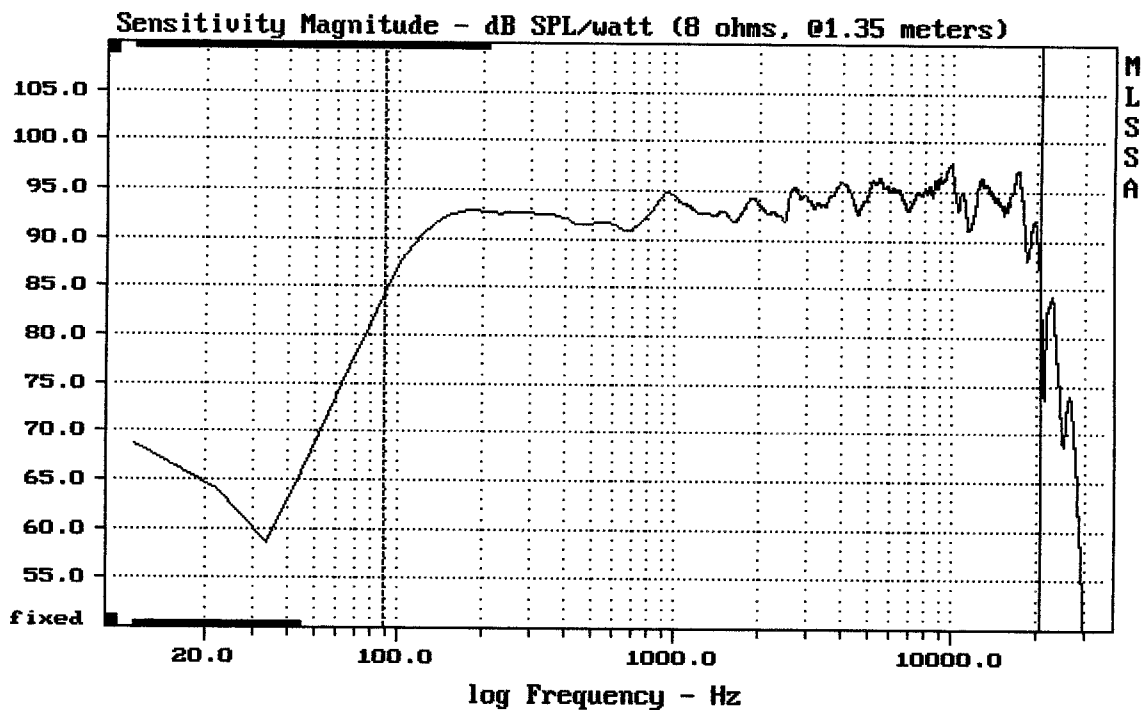

Level (89:20807 Hz) = 93.33 dB SPL/watt (8 ohms, @1.35 meters)


JFX88

MLSSA: Frequency Domain

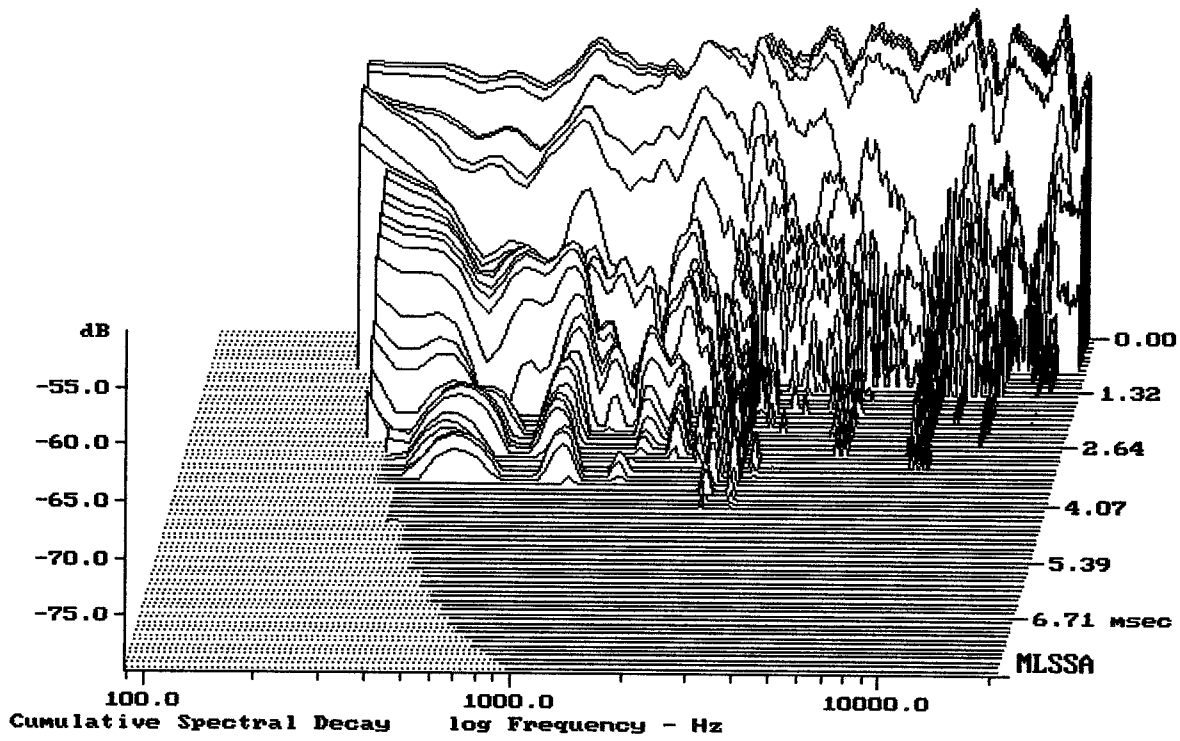

-79.50 dB, 2441 Hz (55), 3.960 msec (37)


DTTO

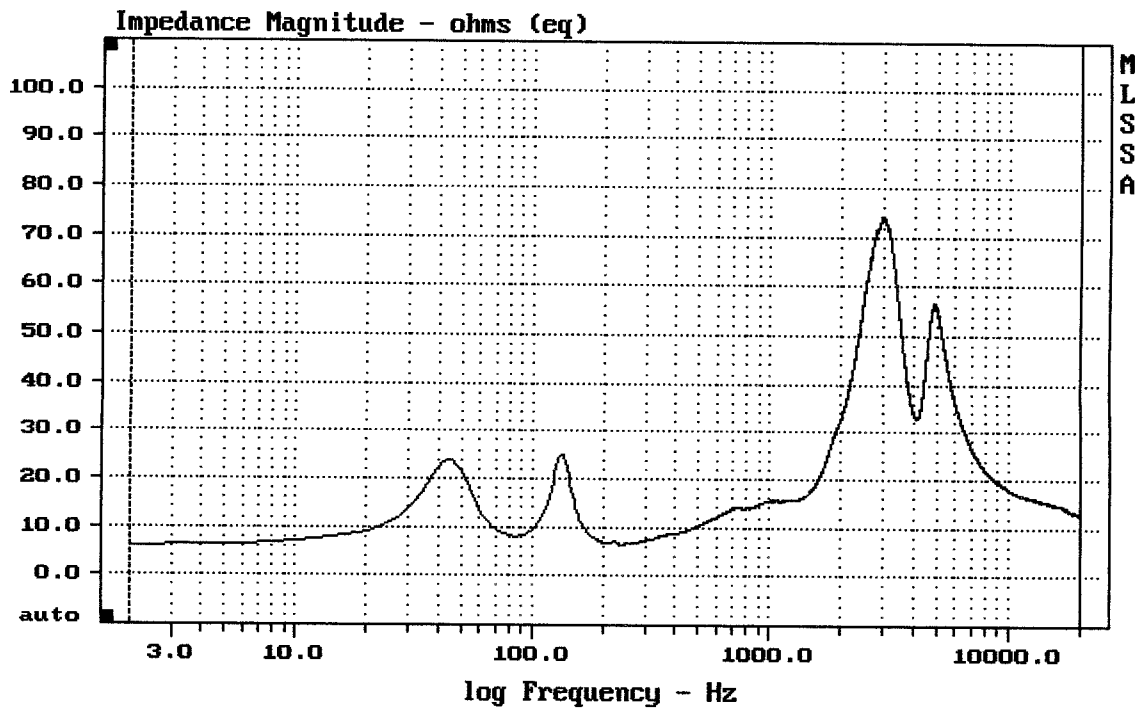

mean: 23.82, rms: 28.07, std: 14.86, max: 74.18, min: 6.124

JFX88


MLSSA: Frequency Domain

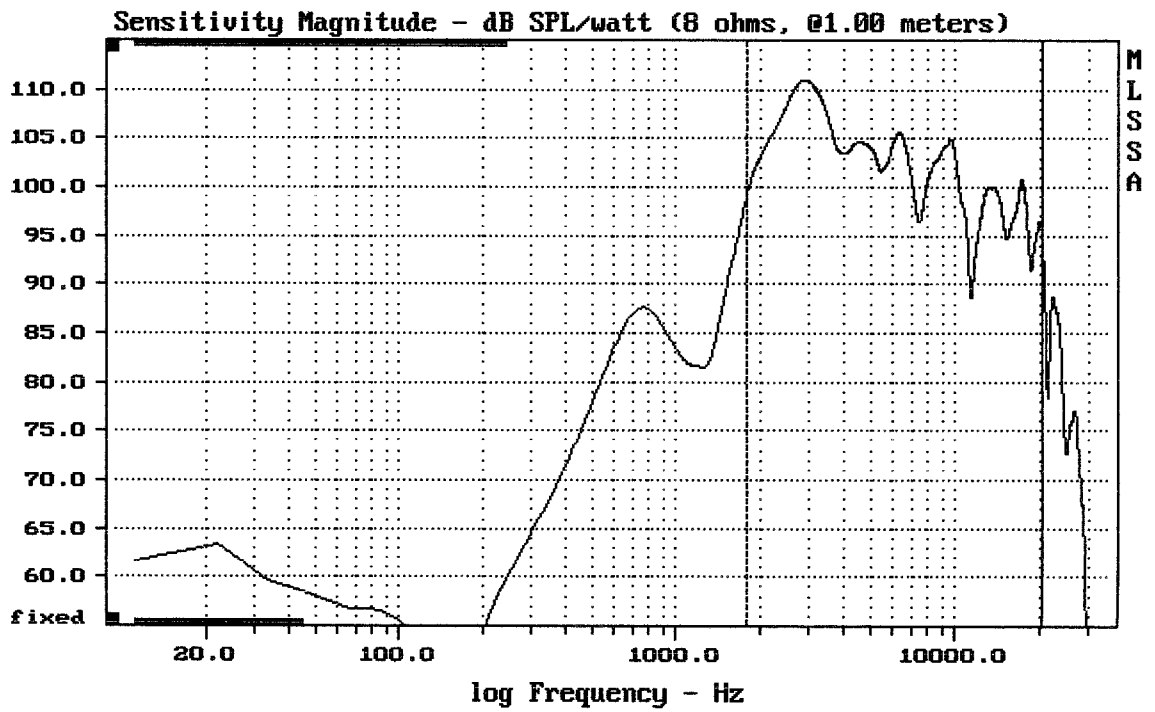


Level (1798:20508 Hz) = 104.70 dB SPL/watt (8 ohms, @1.00 meters)

DRIVER + HORN JFX88

MLSSA: Frequency Domain

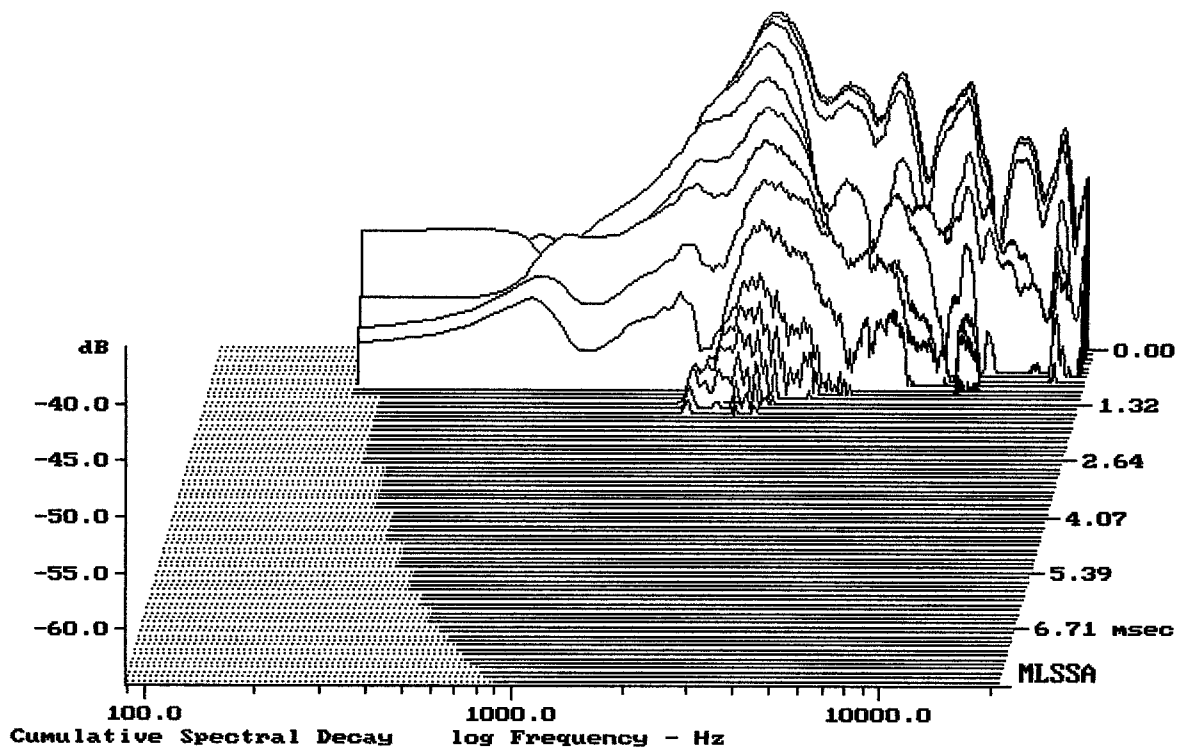


-64.06 dB, 2486 Hz (56), 1.540 msec (15)

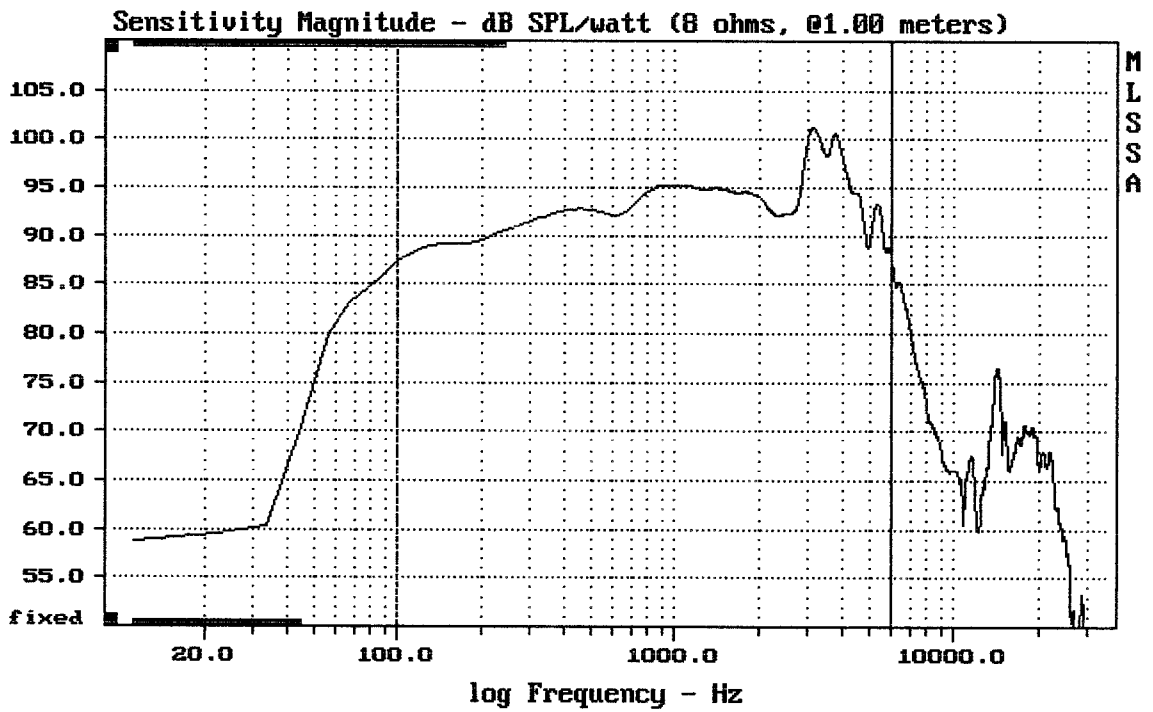

Level (100:6004 Hz) = 93.95 dB SPL/watt (8 ohms, @1.00 meters)

8" FROM JFX88

MLSSA: Frequency Domain

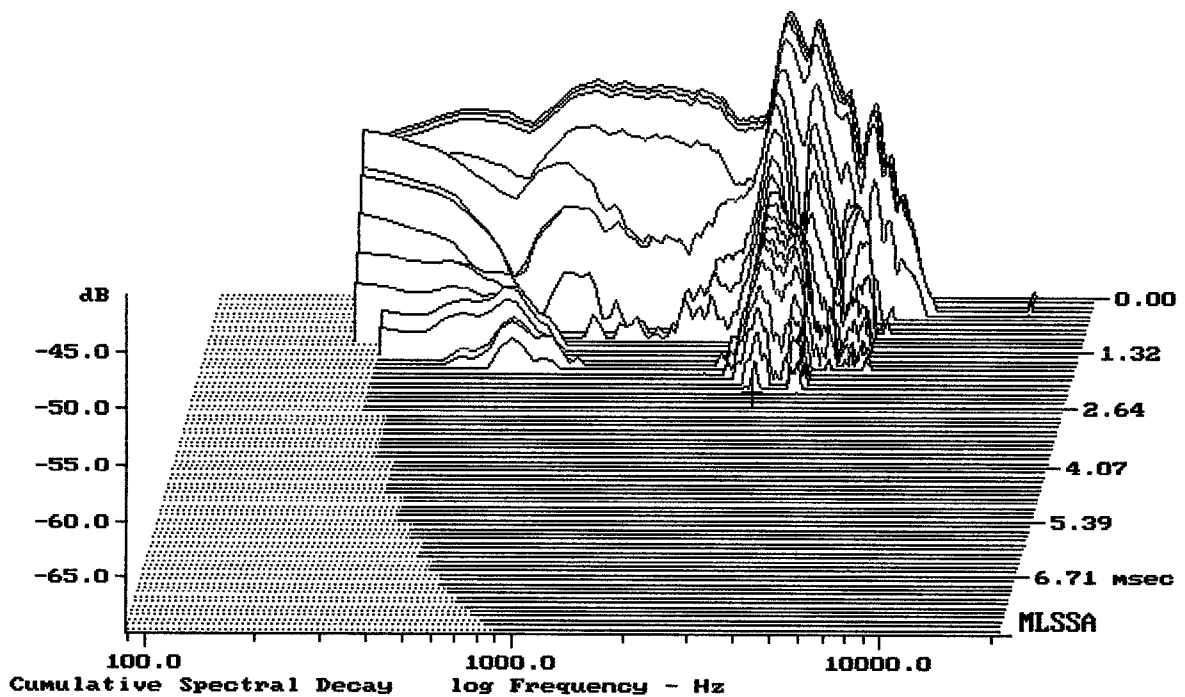

-69.90 dB, 2930 Hz (66), 2.310 msec (22)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.65	Ohms
2	Fs	70.91	Hz
3	Re	5.28	Ohms[dc]
4	Res	37.16	Ohms
5	Qms	2.75	
6	Qes	0.39	
7	Qts	0.34	
8	L1	0.52	mH
9	L2	0.89	mH
10	R2	3.02	Ohms
11	RMSE-load	0.29	Ohms
12	Vas(Sd)	18.56	liters
13	Mms	18.45	grams
14	Cms	273	μ M/Newton
15	B1	10.55	Tesla-M
16	SPLref(Sd)	94.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 220.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -44.7% (-20% to -50% is recommended).

8" FROM EAW JFX88

MLSSA: Parameters

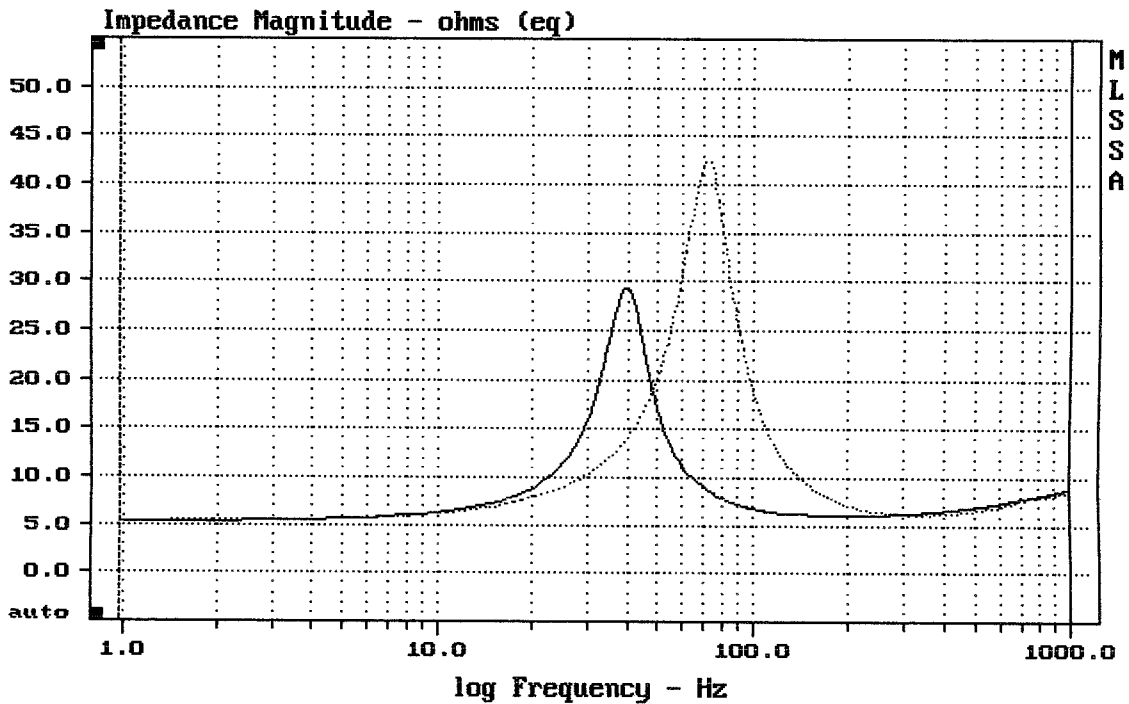

mean: 8.853, rms: 10.51, std: 5.662, max: 42.46, min: 5.377

MLSSA: Frequency Domain