


Level (100:5005 Hz) = 93.62 dB SPL/watt (8 ohms, @1.00 meters)

10PW7

MLSSA: Frequency Domain

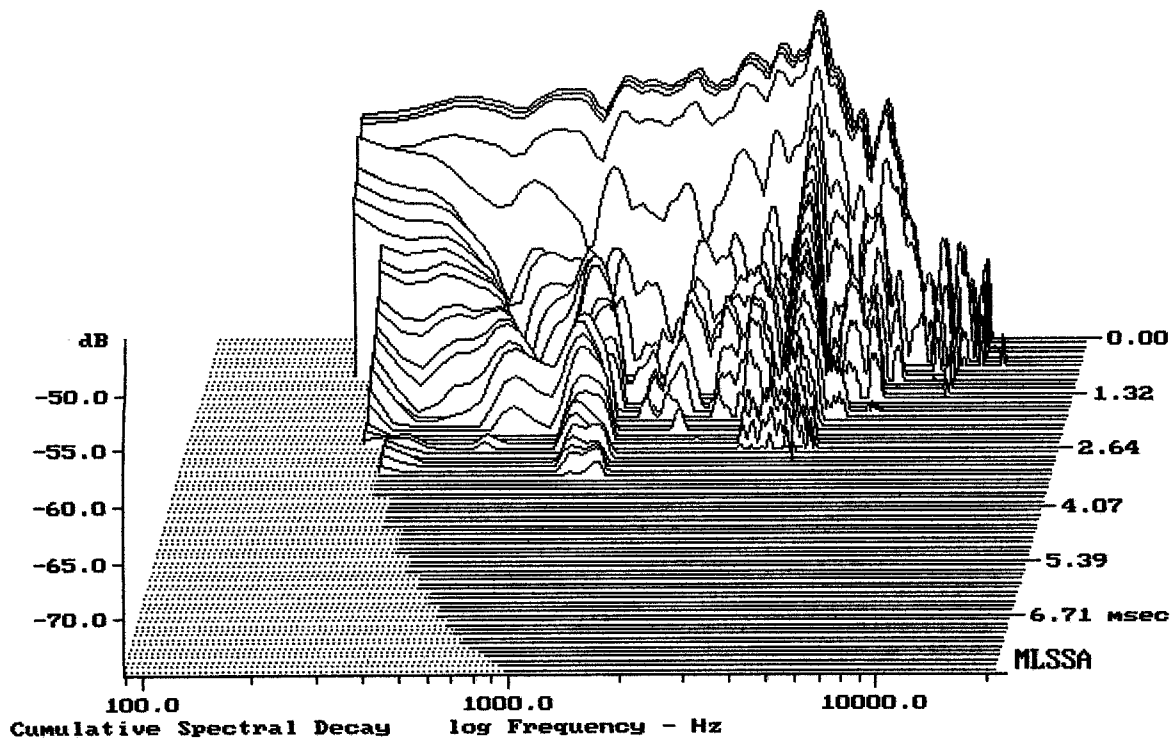

-74.53 dB, 3995 Hz (90), 2.750 msec (26)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.20	Ohms
2	Fs	83.84	Hz
3	Re	4.72	Ohms[dc]
4	Res	55.55	Ohms
5	Qms	11.19	
6	Qes	0.95	
7	Qts	0.88	
8	L1	0.60	mH
9	L2	0.81	mH
10	R2	3.45	Ohms
11	RMSE-load	0.23	Ohms
12	Vas(Sd)	30.26	liters
13	Mms	20.07	grams
14	Cms	180	μ M/Newton
15	B1	7.24	Tesla-M
16	SPLref(Sd)	94.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 346.36 sq cm


DCR mode: Measure (-0.68 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.5% (-20% to -50% is recommended).

10PW7

MLSSA: Parameters

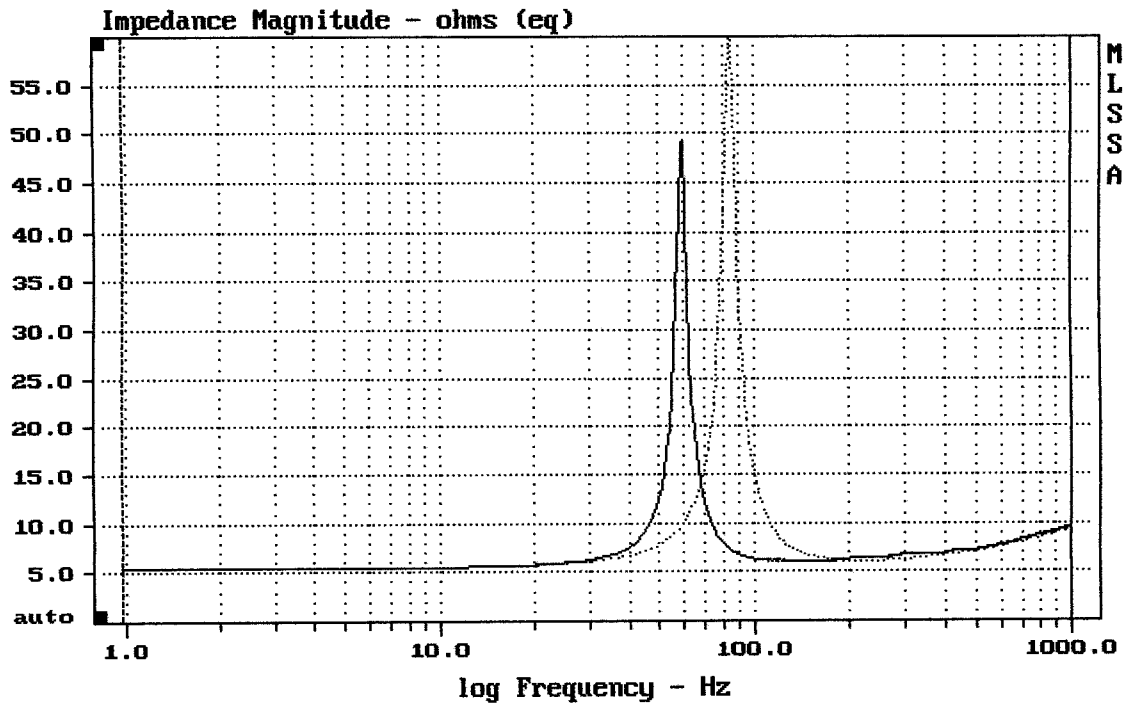

mean: 8.341, rms: 9.755, std: 5.059, max: 61.45, min: 5.378

MLSSA: Frequency Domain