


Impulse Response - volts

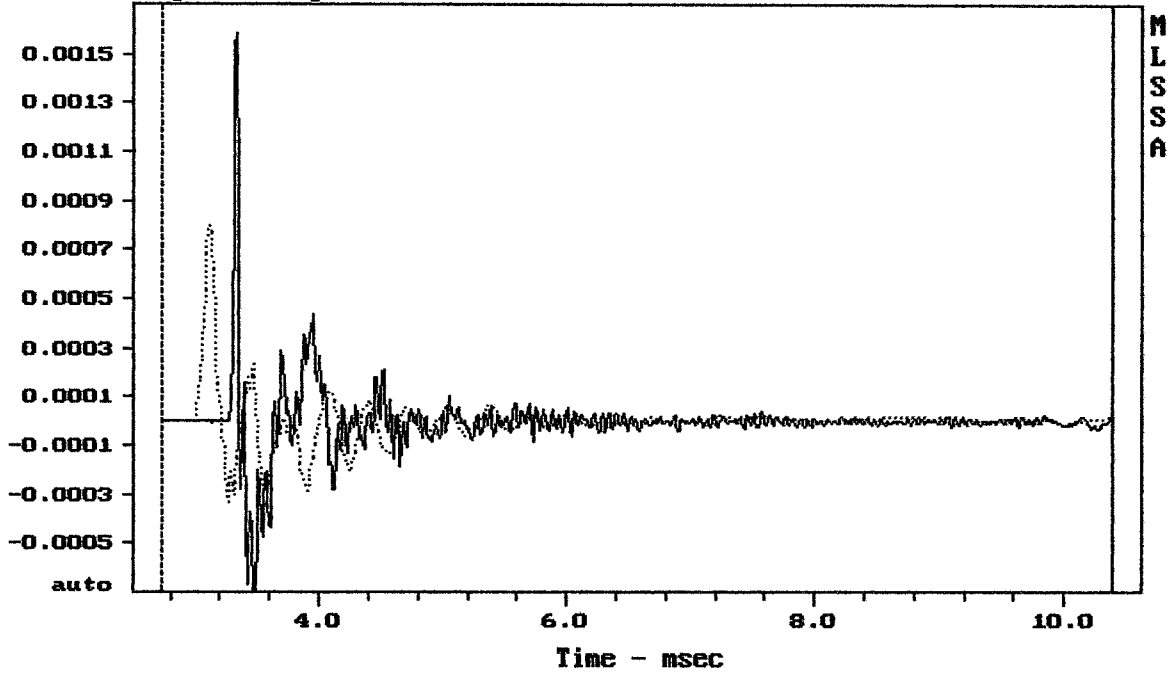


CURSOR: $dy = 1.00073e-005$ $x = 10.3840$ (944)

10FCX64

MLSSA: Time Domain


Sensitivity Mag - dB SPL/watt (8 ohms, @1.00 meters) (0.33 oct)

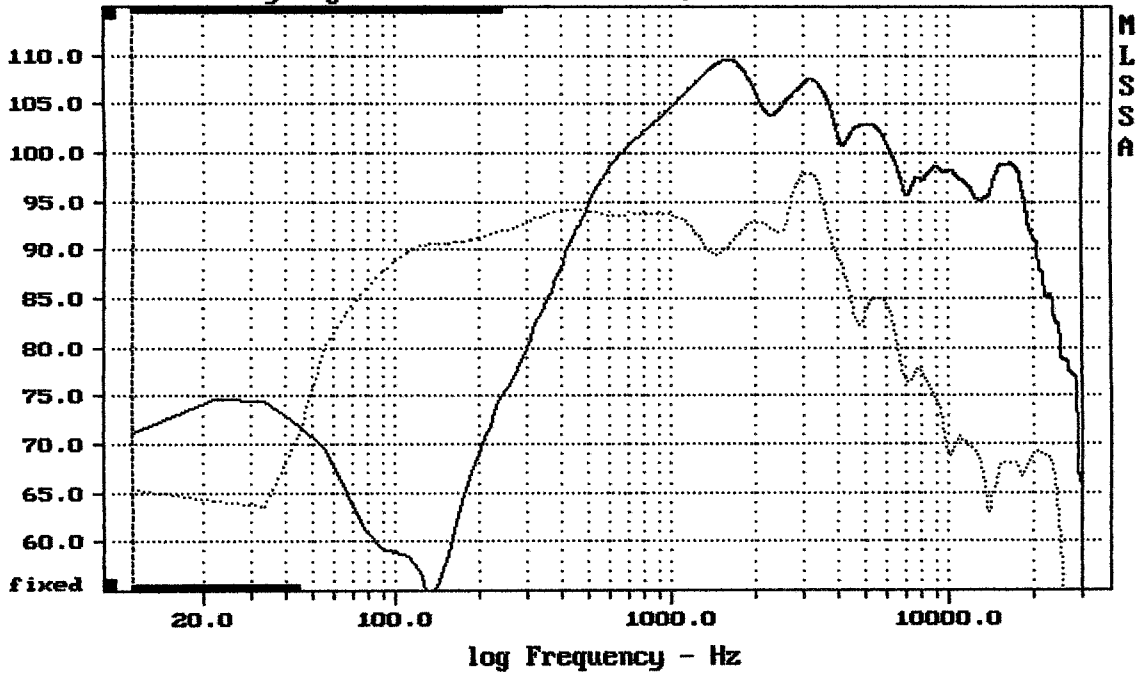

CURSOR: $dy = -23.2259$ $x = 30007.1014$ (2704)

10FCX64


MLSSA: Frequency Domain

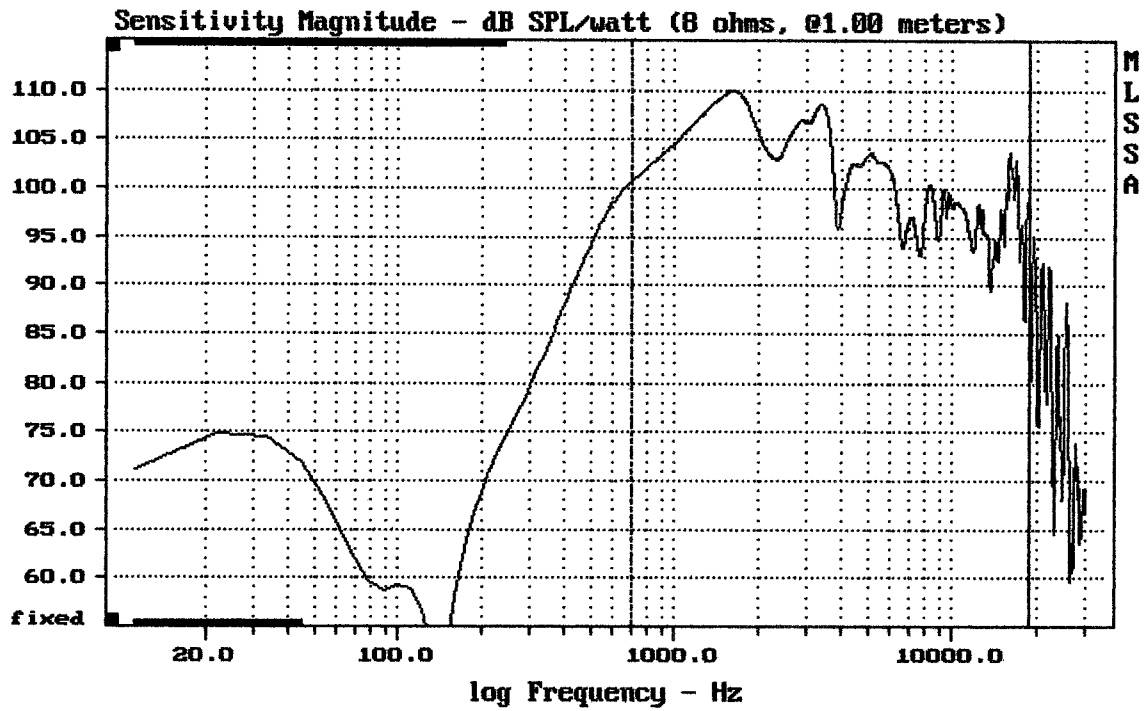

Level (699:18999 Hz) = 104.41 dB SPL/watt (8 ohms, @1.00 meters)


10FCX64

MLSSA: Frequency Domain

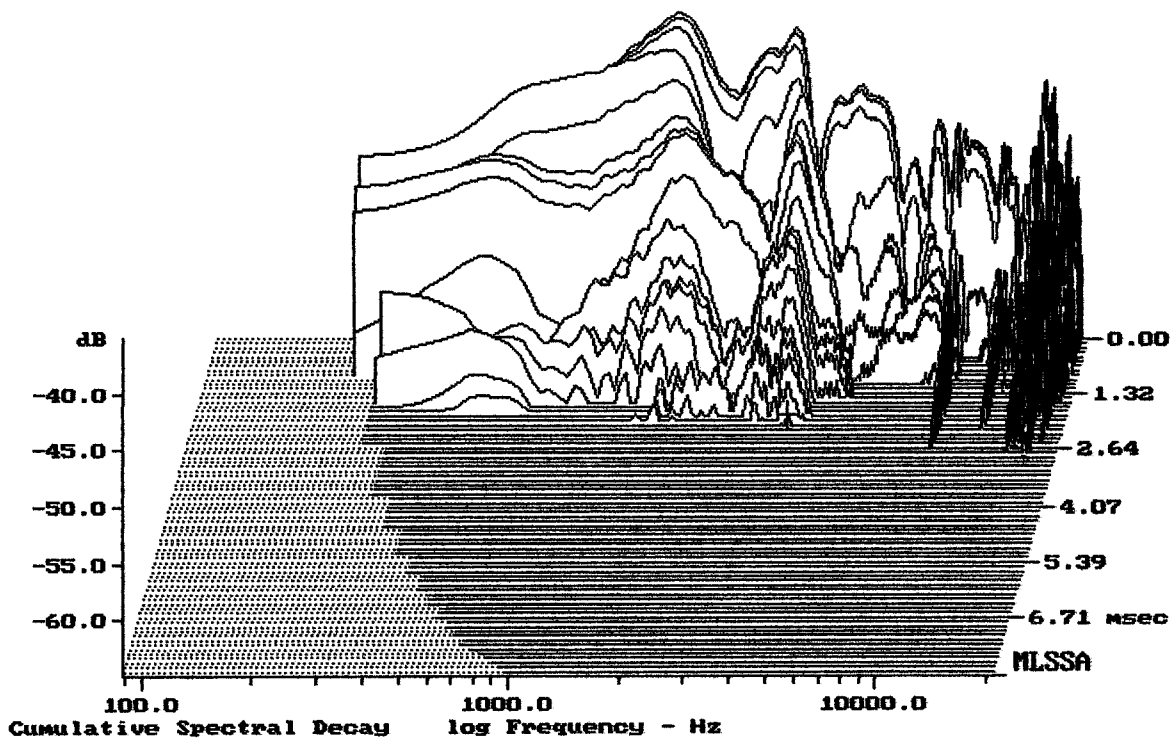

-63.97 dB, 3684 Hz (83), 2.090 msec (20)

DTTO

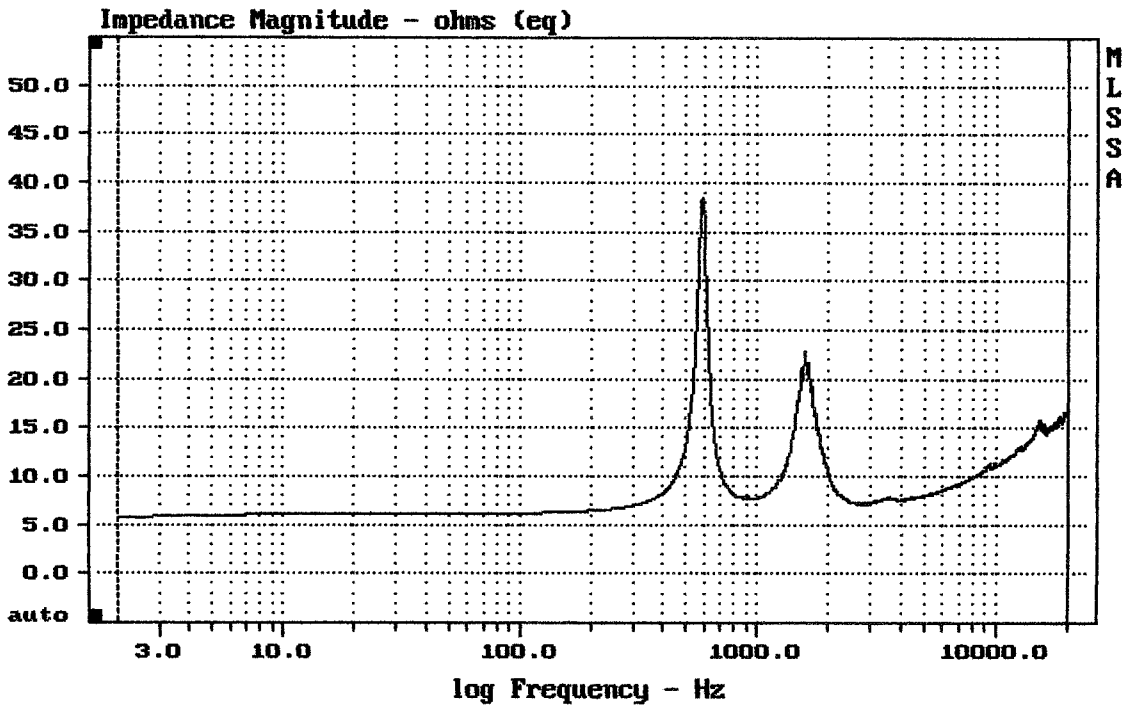


mean: 11.82, rms: 12.31, std: 3.425, max: 38.42, min: 5.774

10FCX64

8-27-93 10:08 PM


MLSSA: Frequency Domain

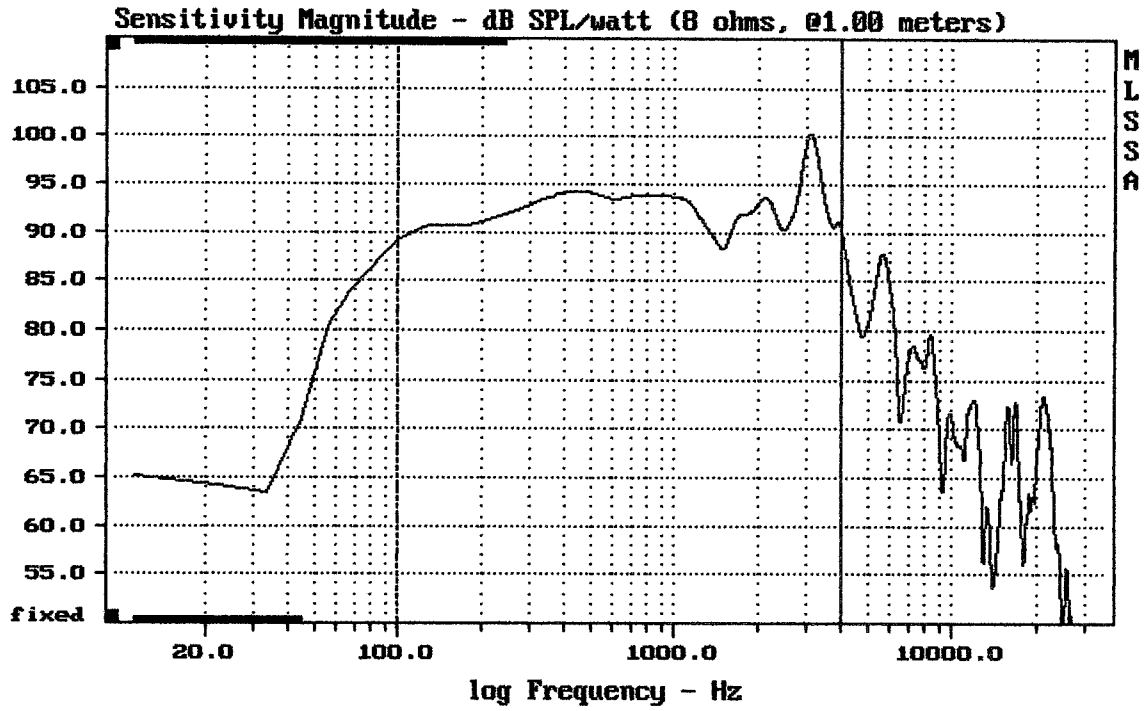

Level (100:4006 Hz) = 93.05 dB SPL/watt (8 ohms, @1.00 meters)

10FCX64

MLSSA: Frequency Domain

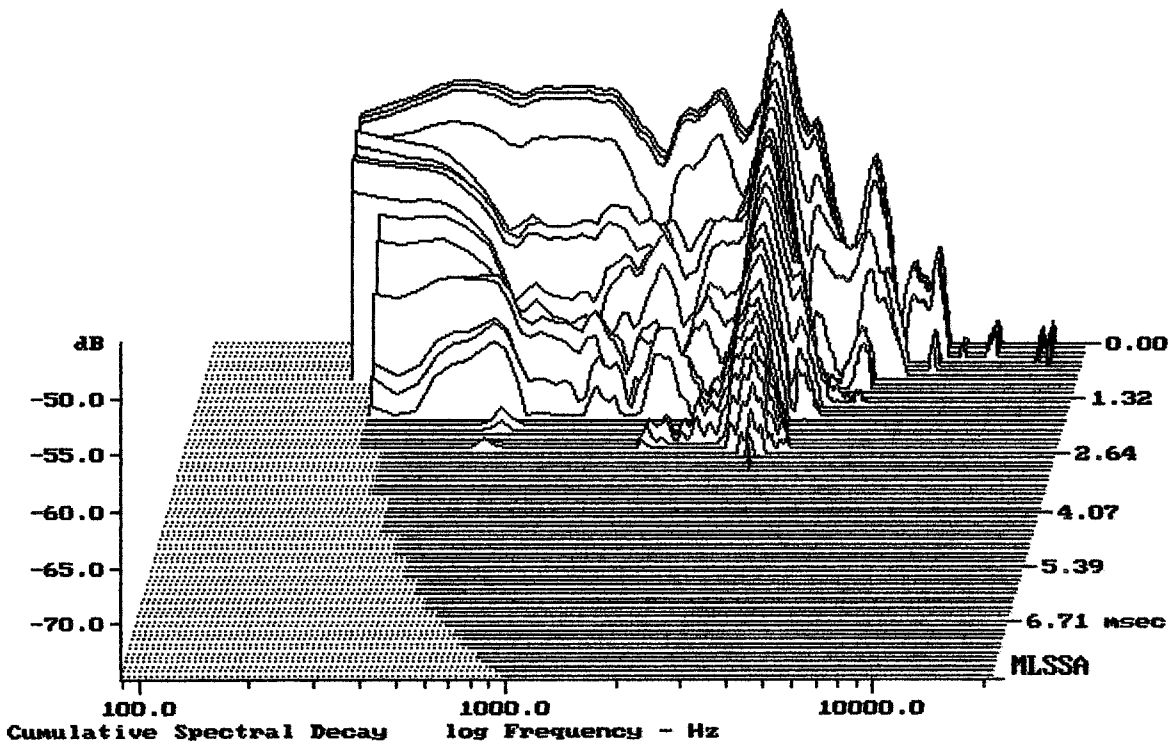

-74.64 dB, 3107 Hz (70), 2.860 msec (27)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.45	Ohms
2	Fs	71.67	Hz
3	Re	5.65	Ohms[dc]
4	Res	76.43	Ohms
5	Qms	6.06	
6	Qes	0.45	
7	Qts	0.42	
8	L1	0.85	mH
9	L2	1.06	mH
10	R2	4.10	Ohms
11	RMSE-load	0.49	Ohms
12	Vas(Sd)	24.43	liters
13	Mms	27.98	grams
14	Cms	176	$\mu\text{M}/\text{Newton}$
15	B1	12.60	Tesla-M
16	SPLref(Sd)	94.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 314.16 sq cm


DCR mode: Measure (-0.17 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.3% (-20% to -50% is recommended).

10FCX64

MLSSA: Parameters

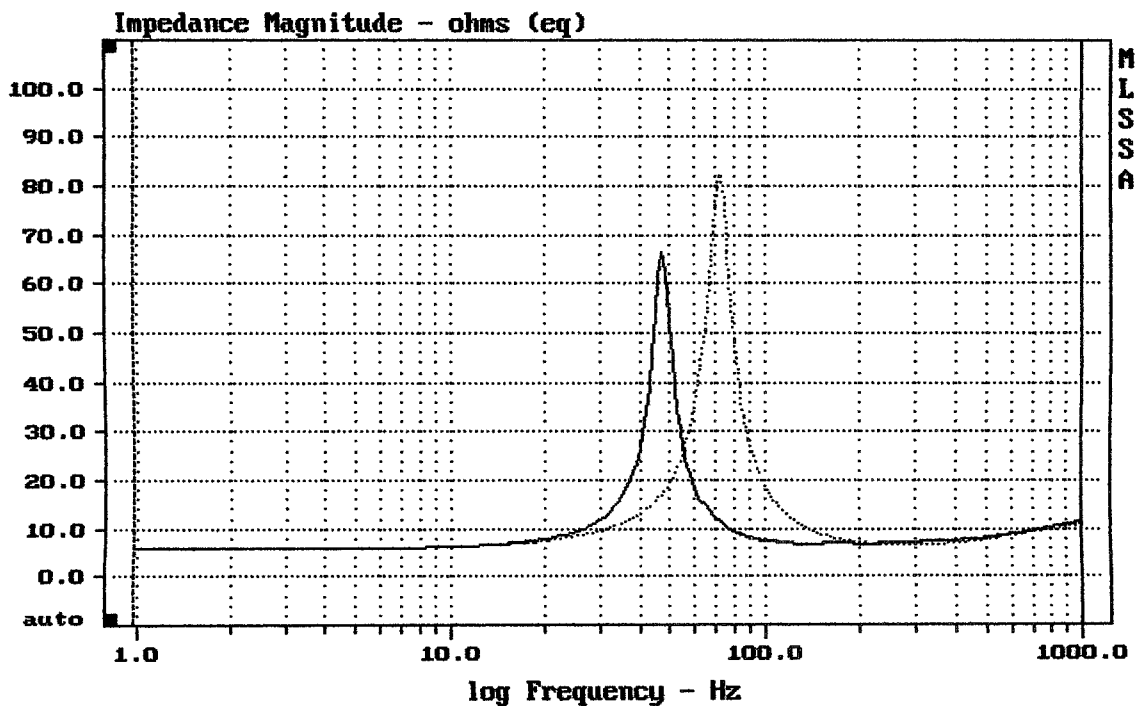

mean: 10.44, rms: 13.55, std: 8.637, max: 82.11, min: 5.798

MLSSA: Frequency Domain