


**E-shop:**


<http://eshop.prodance.cz/dlm12s/d-97229/>

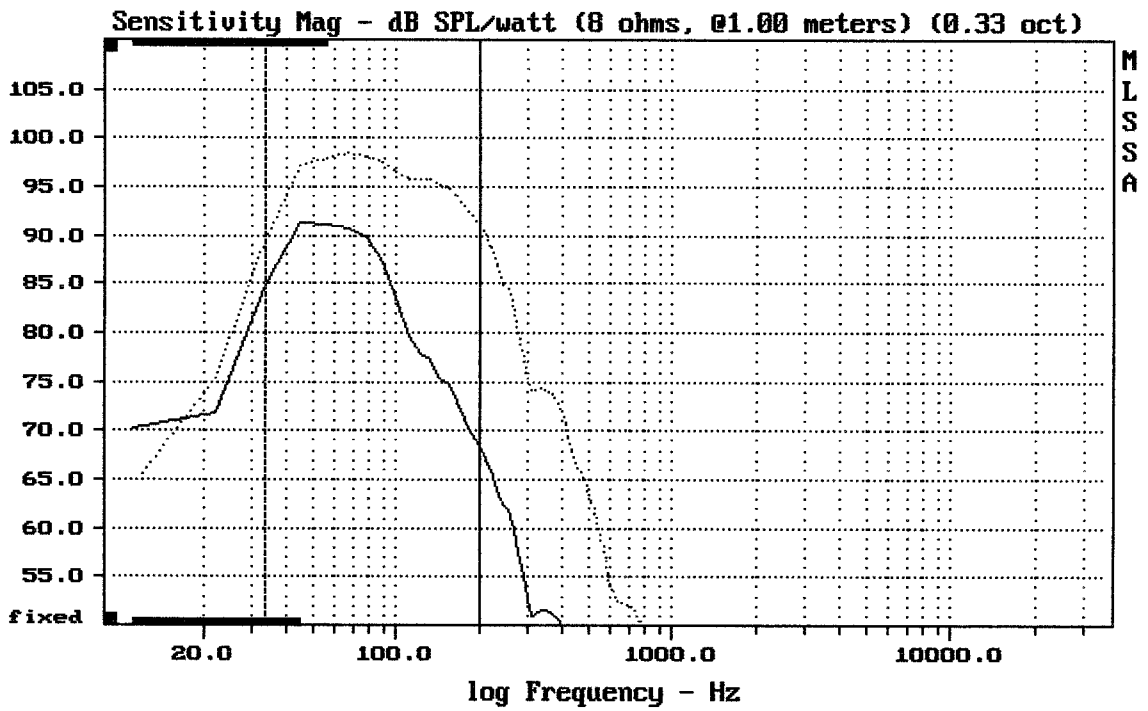

mean: 95.55, rms: 95.84, std: 2.03, max: 98.46, min: 89.58


DLM12S 60/120Hz

MLSSA: Frequency Domain

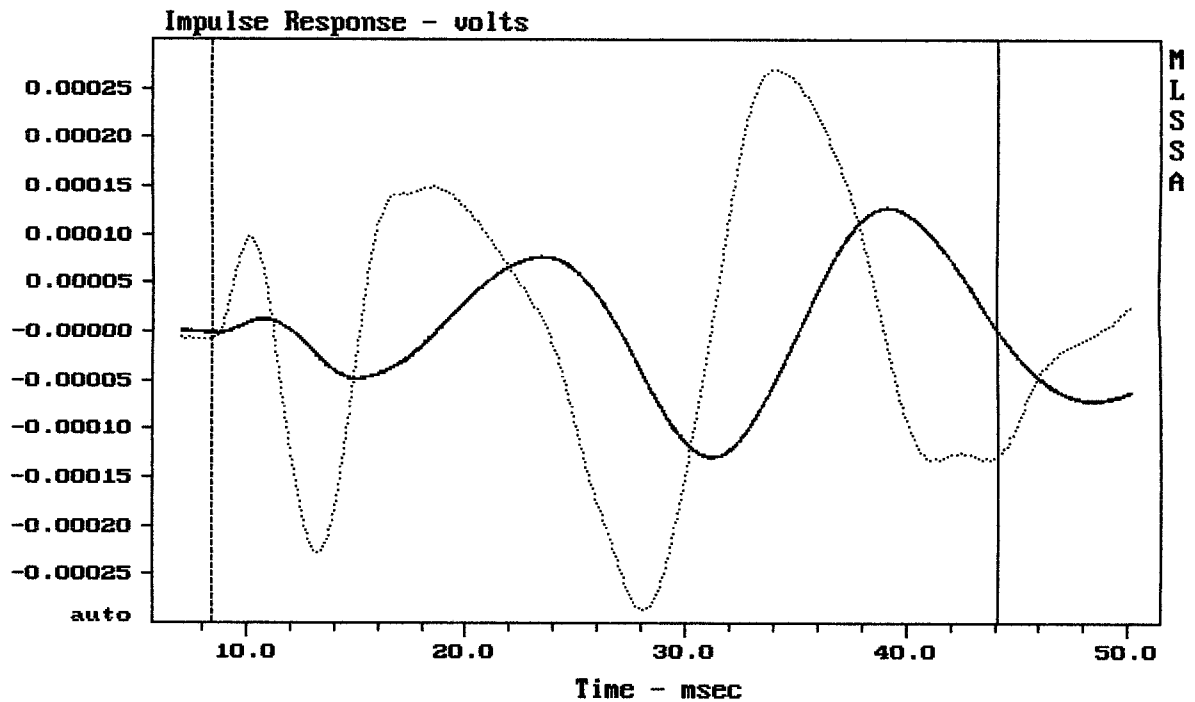

CURSOR: dy = -0.000130891 x = 44.0990 (4009)


DLM12S 60/120Hz

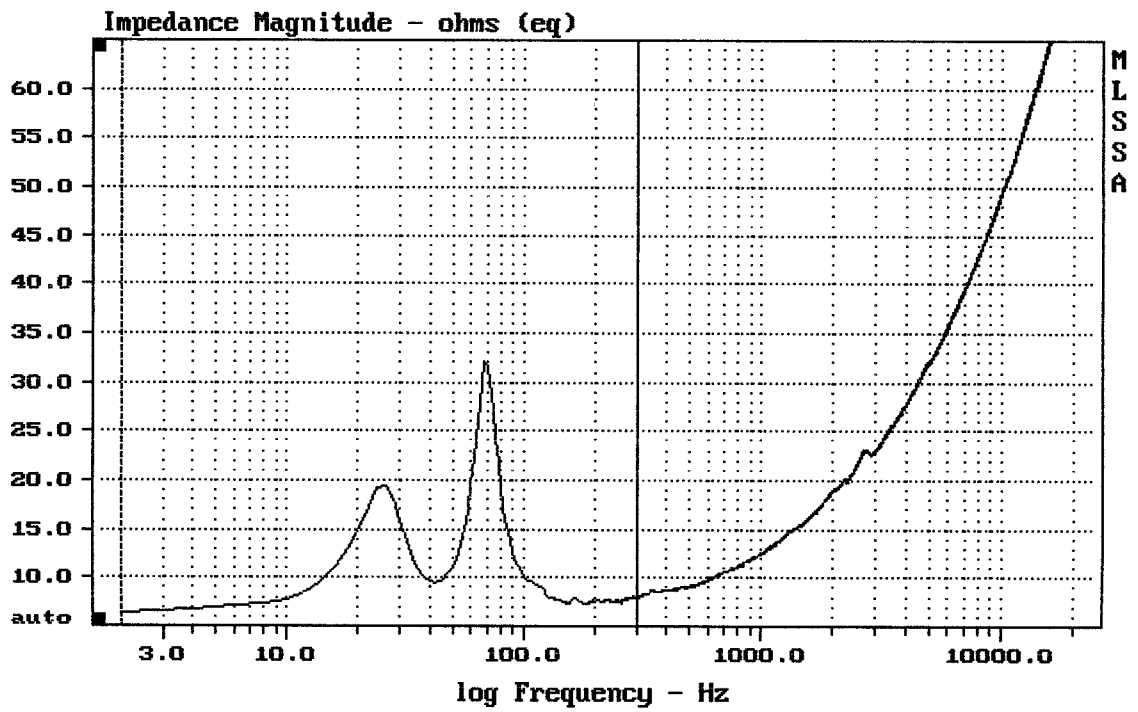


mean: 10.31, rms: 11.57, std: 5.243, max: 32.12, min: 6.327

MACKIE DLM12S

MLSSA: Frequency Domain

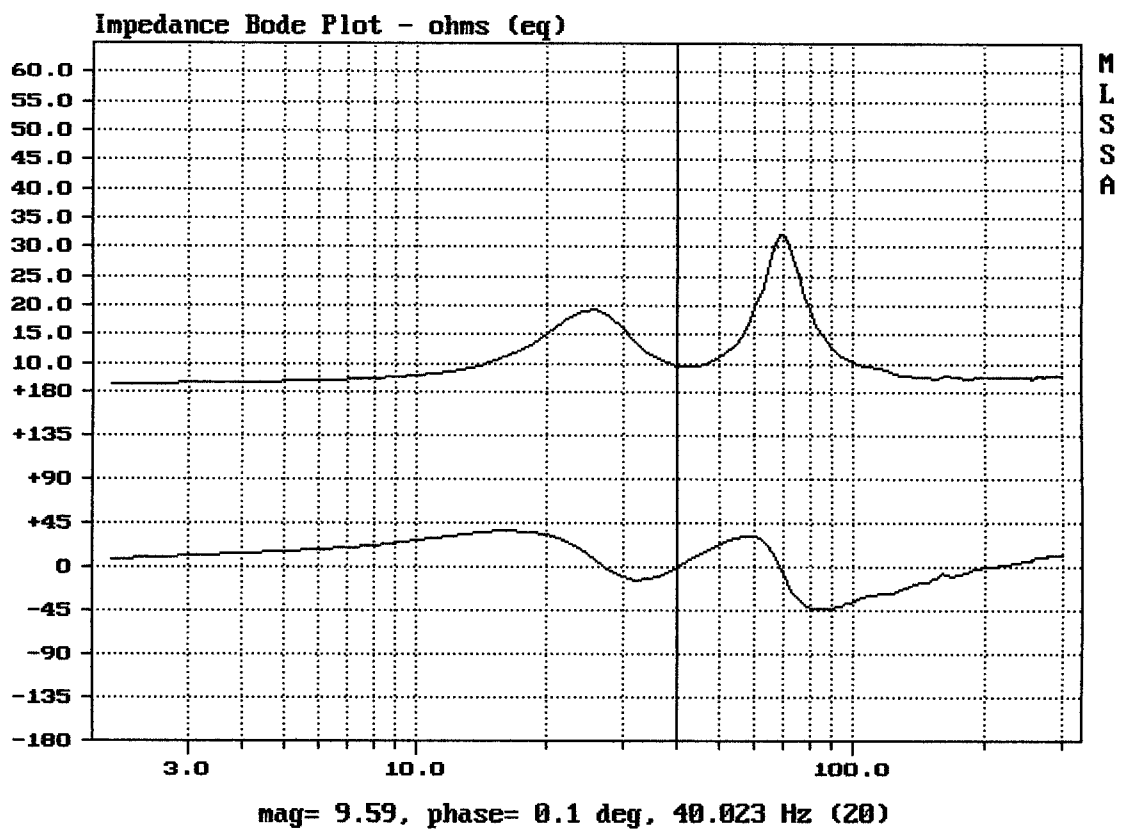


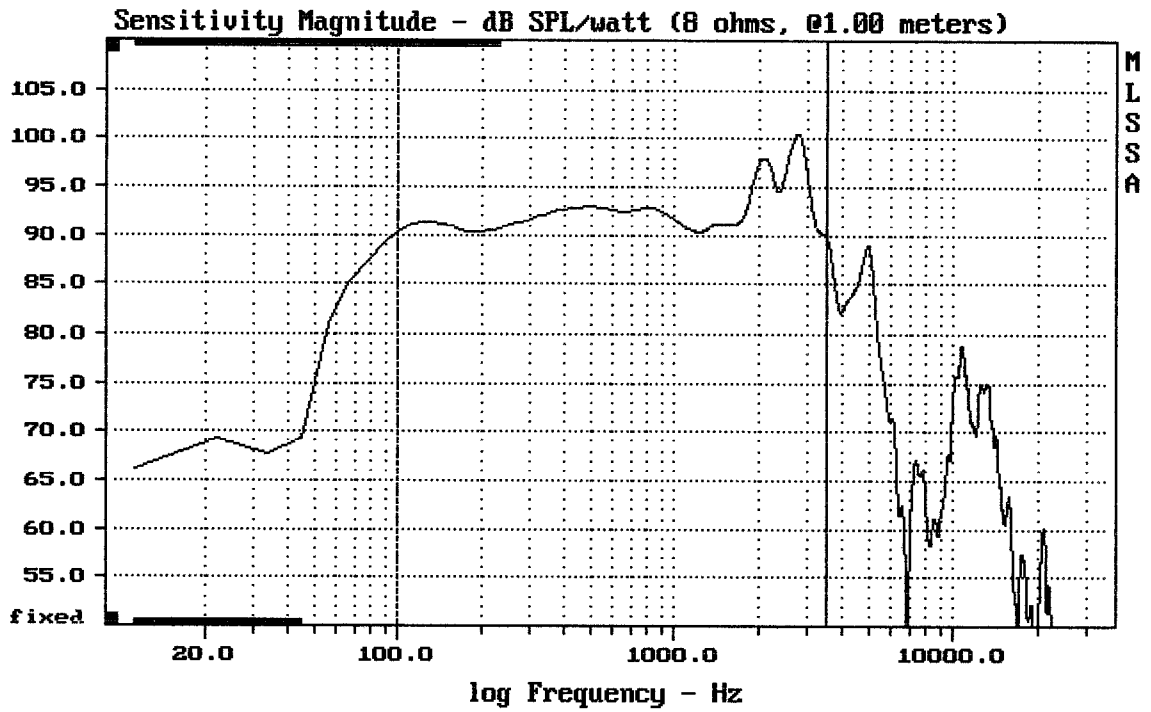

Level (100:3507 Hz) = 93.15 dB SPL/watt (8 ohms, @1.00 meters)

12" DLM12S

MLSSA: Frequency Domain

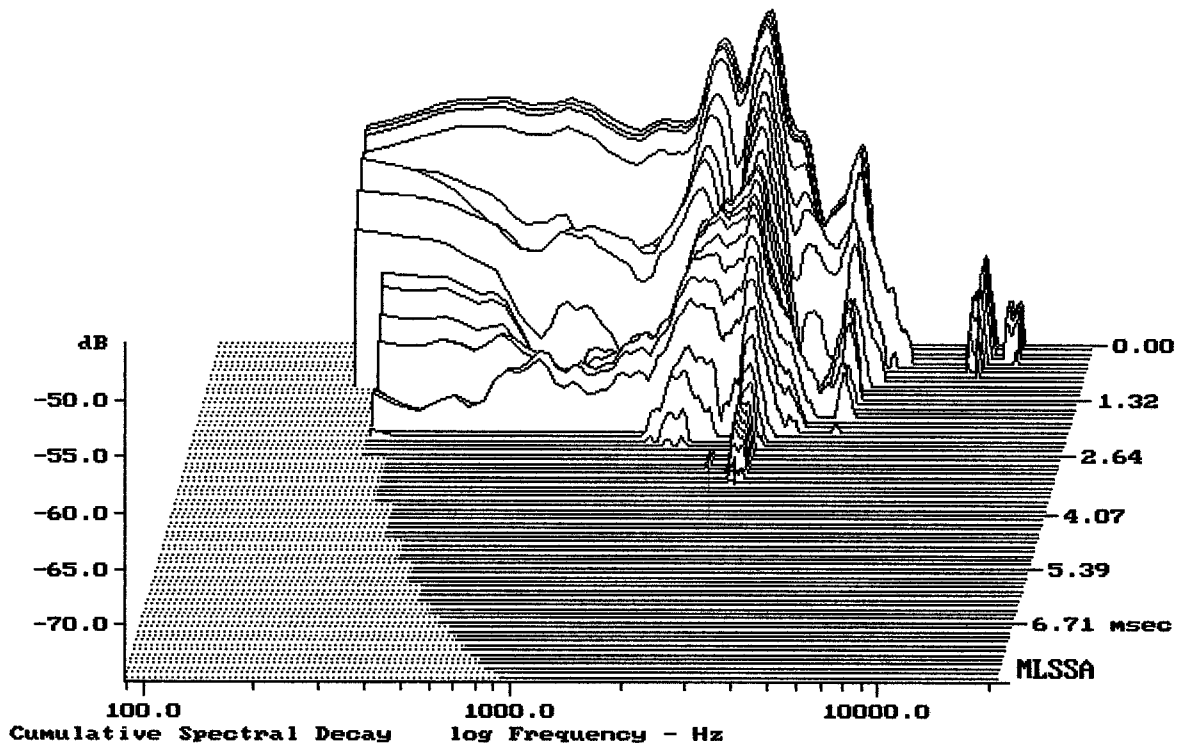

-74.45 dB, 2841 Hz (64), 3.190 msec (30)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.31	Ohms
2	Fs	43.59	Hz
3	Re	5.66	Ohms[dc]
4	Res	62.61	Ohms
5	Qms	5.30	
6	Qes	0.48	
7	Qts	0.44	
8	L1	0.97	mH
9	L2	1.11	mH
10	R2	4.53	Ohms
11	RMSE-load	0.35	Ohms
12	Vas(Sd)	72.24	liters
13	Mms	78.84	grams
14	Cms	169	$\mu\text{M}/\text{Newton}$
15	B1	15.97	Tesla-M
16	SPLref(Sd)	92.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.2% (-20% to -50% is recommended).

P/N 2038636 LC12-3014-8 FROM DLM12S


MLSSA: Parameters

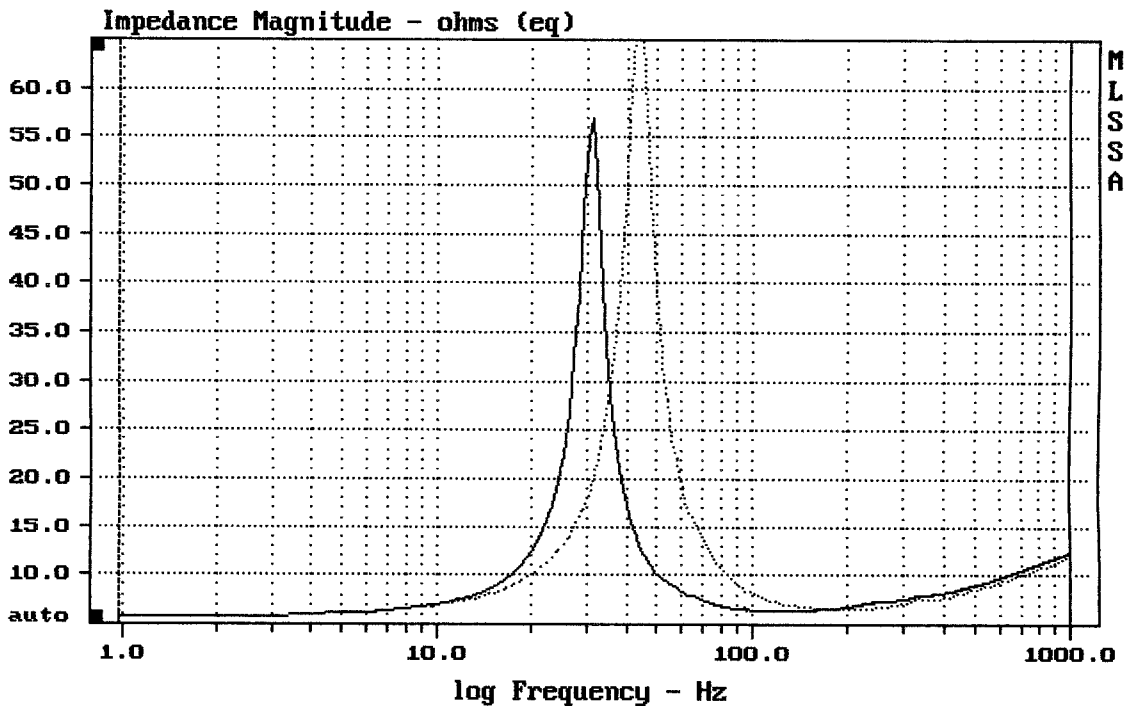

mean: 9.947, rms: 11.58, std: 5.93, max: 68.8, min: 5.723

MACKIE DLM12S

MLSSA: Frequency Domain

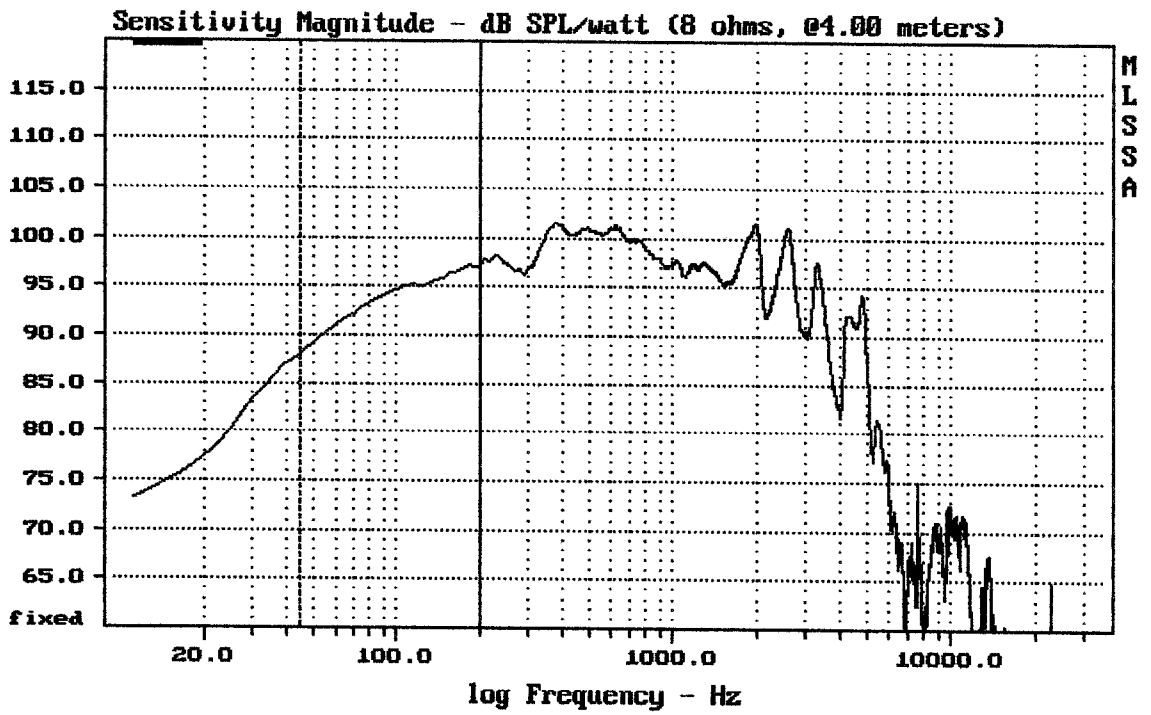



---

Level (44:200 Hz) = 94.29 dB SPL/watt (8 ohms, 04.00 meters)

---

Mackie DLM12S pasiv

MLSSA: Frequency Domain

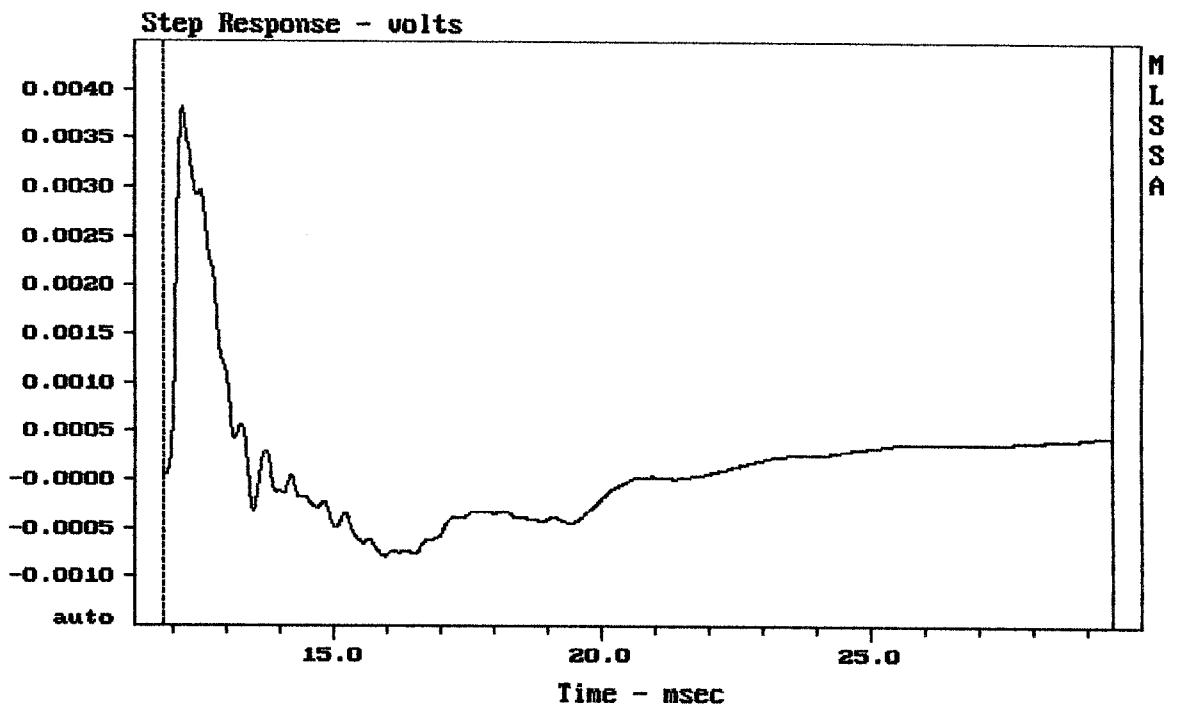



---

CURSOR: y = 0.000455007 x = 29.4580 (2678)

---


Mackie DLM12S pasiv

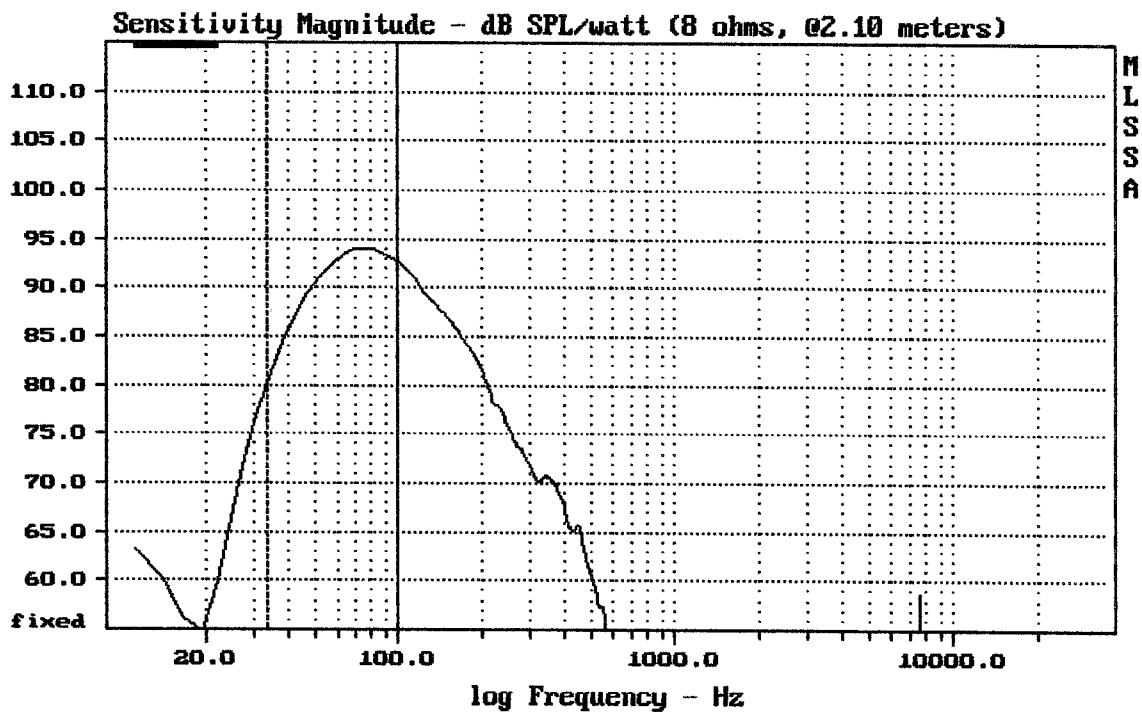

mean: 91.86, rms: 92.25, std: 2.33, max: 94.00, min: 80.10


Mackie DLM12S X-0 pro DLM8

MLSSA: Frequency Domain

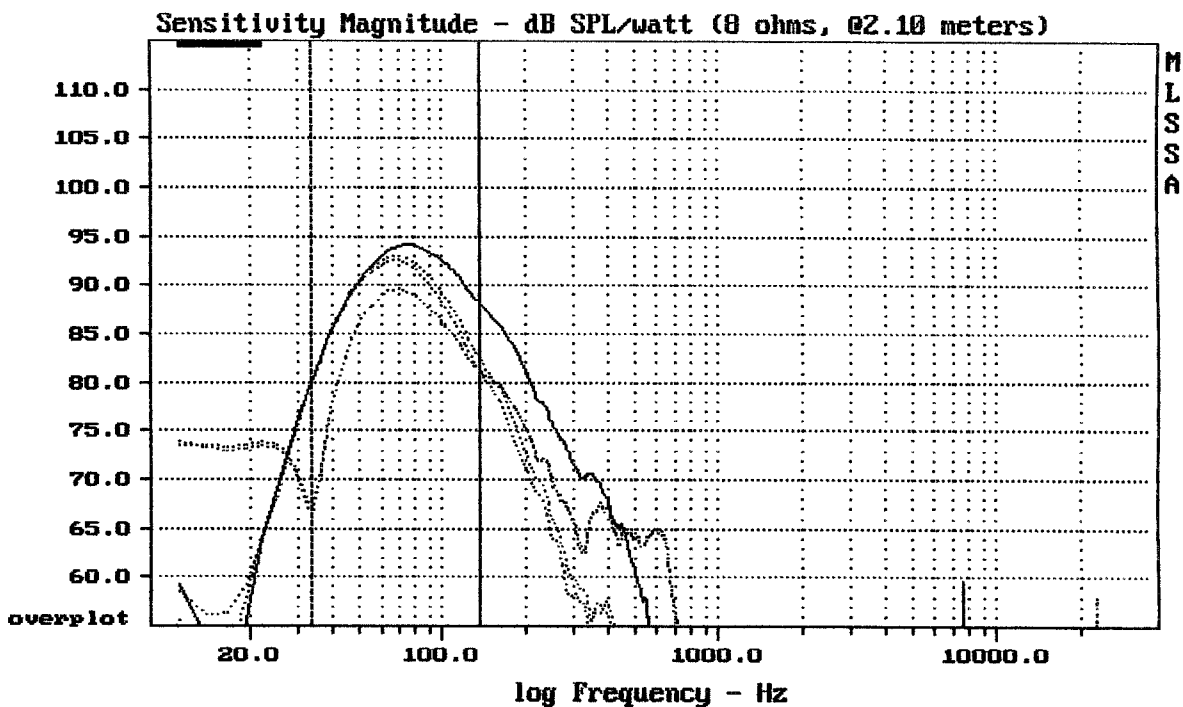

CURSOR: y = 81.2378 x = 135.9419 (49)

Mackie DLM12S x-0 pro DLM8, DLM12, SRM350, SRM450

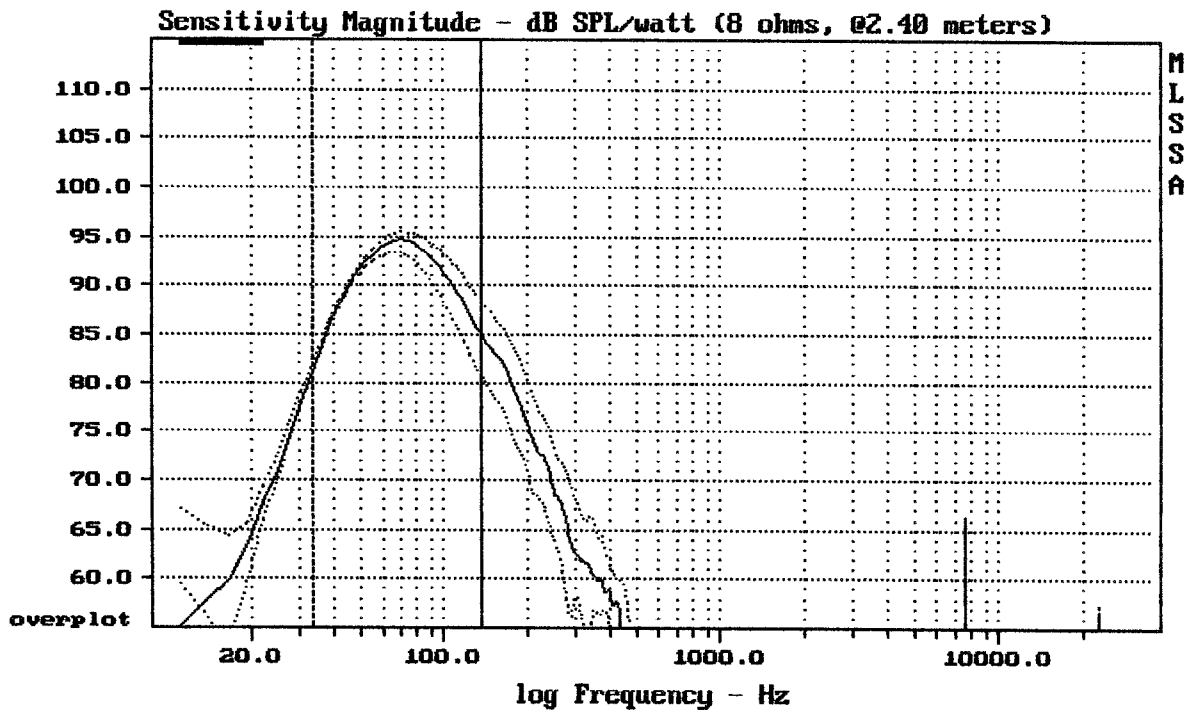


---

CURSOR: y = 88.551 x = 135.9419 (49)

---

MACKIE DLM12S variable X-0 120Hz / 105Hz / 90Hz