


mean: 104.37, rms: 104.65, std: 1.99, max: 106.50, min: 96.61


EAW NTS250

MLSSA: Frequency Domain

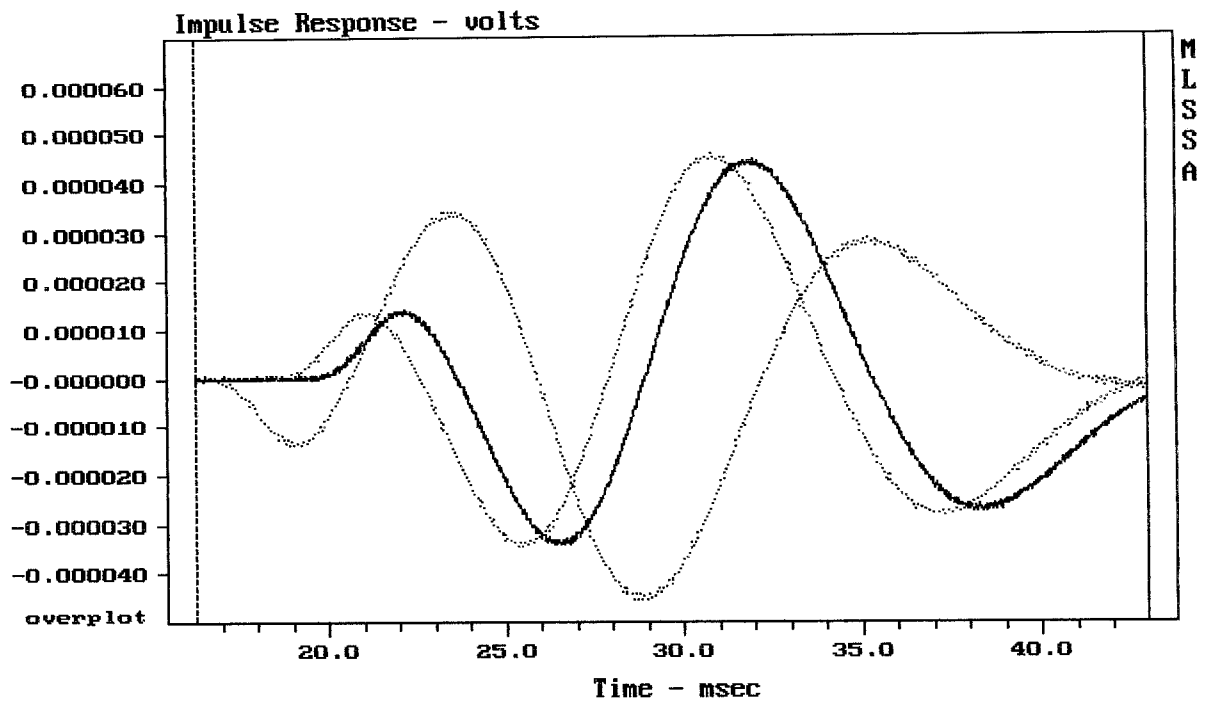

CURSOR: y = -6.06676e-007 x = 42.9660 (3906)


EAWNTS250 norm hunercar / cardioid

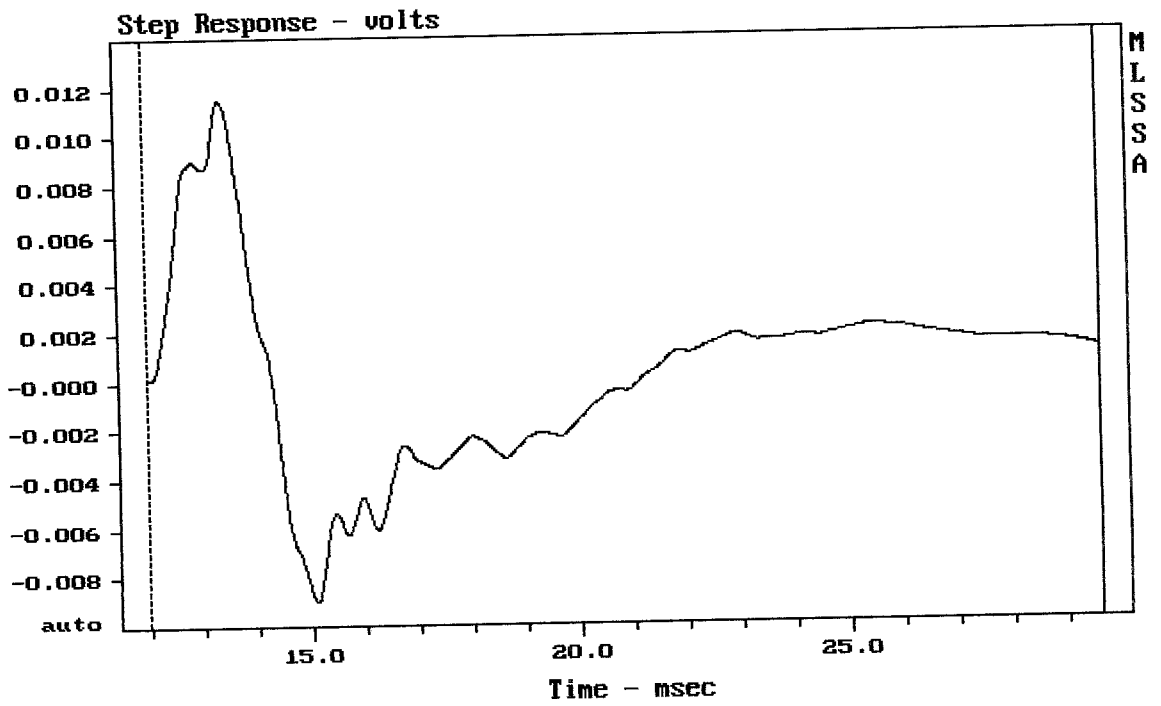


CURSOR: y = 0.00107146 x = 29.5900 (2690)

EAW NTS250 pasiv

MLSSA: Time Domain

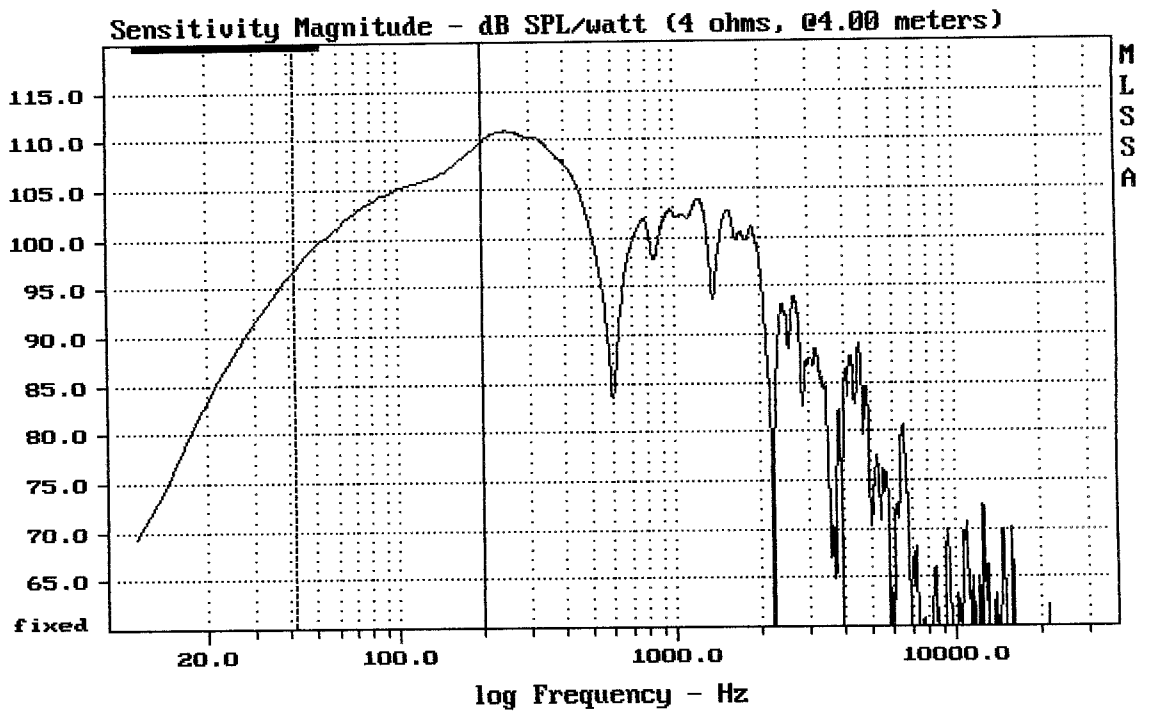


CURSOR: y = 109.759 x = 199.7514 (72)

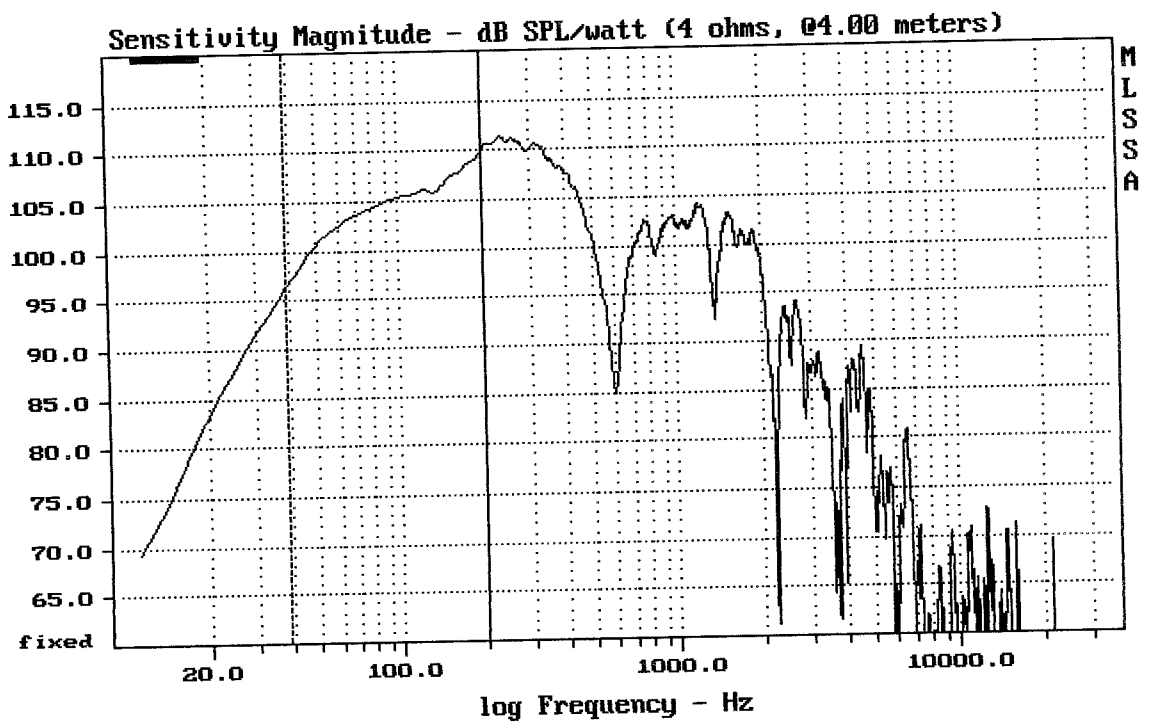


Level (39:200 Hz) = 105.14 dB SPL/watt (4 ohms, @4.00 meters)

EAW NTS250 pasiv

MLSSA: Frequency Domain

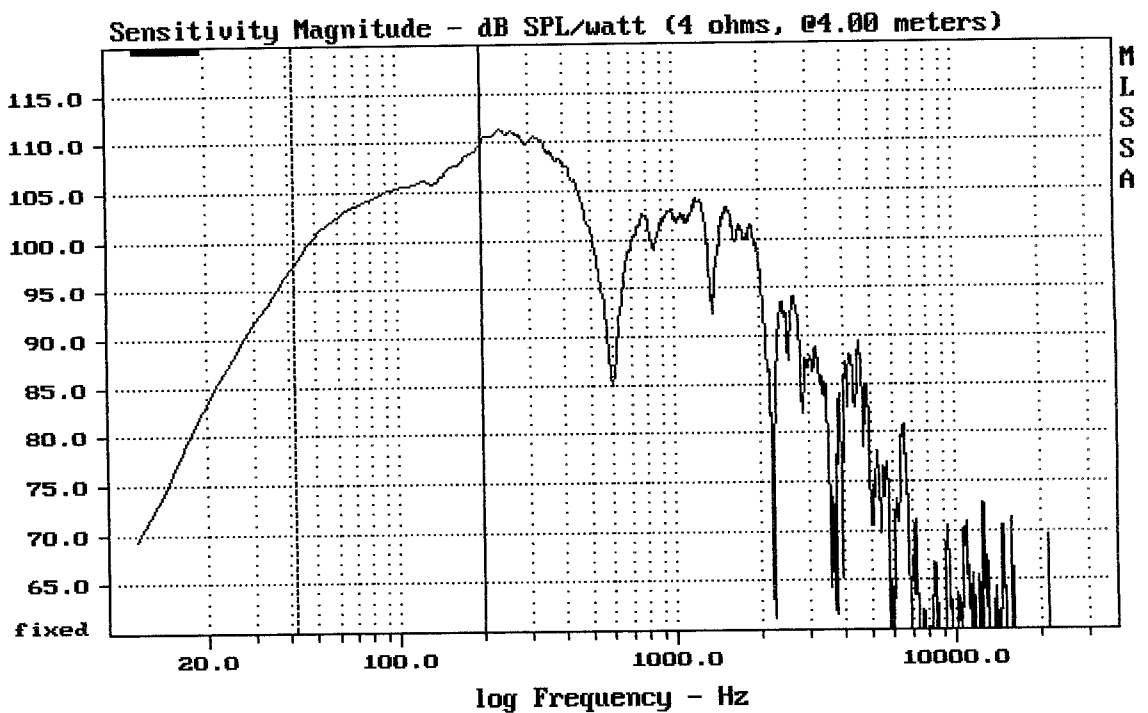


Level (42:200 Hz) = 105.30 dB SPL/watt (4 ohms, @4.00 meters)

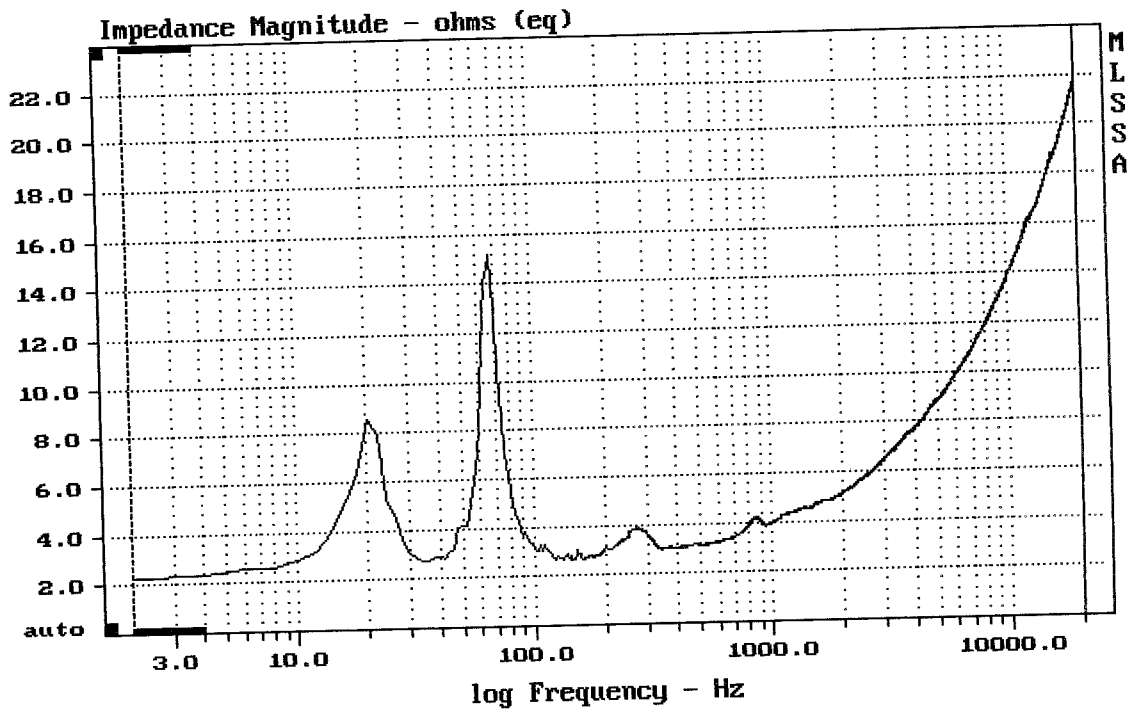


mean: 13.26, rms: 14.31, std: 5.384, max: 21.85, min: 2.263

EAW NTS250 pasiv

MLSSA: Frequency Domain

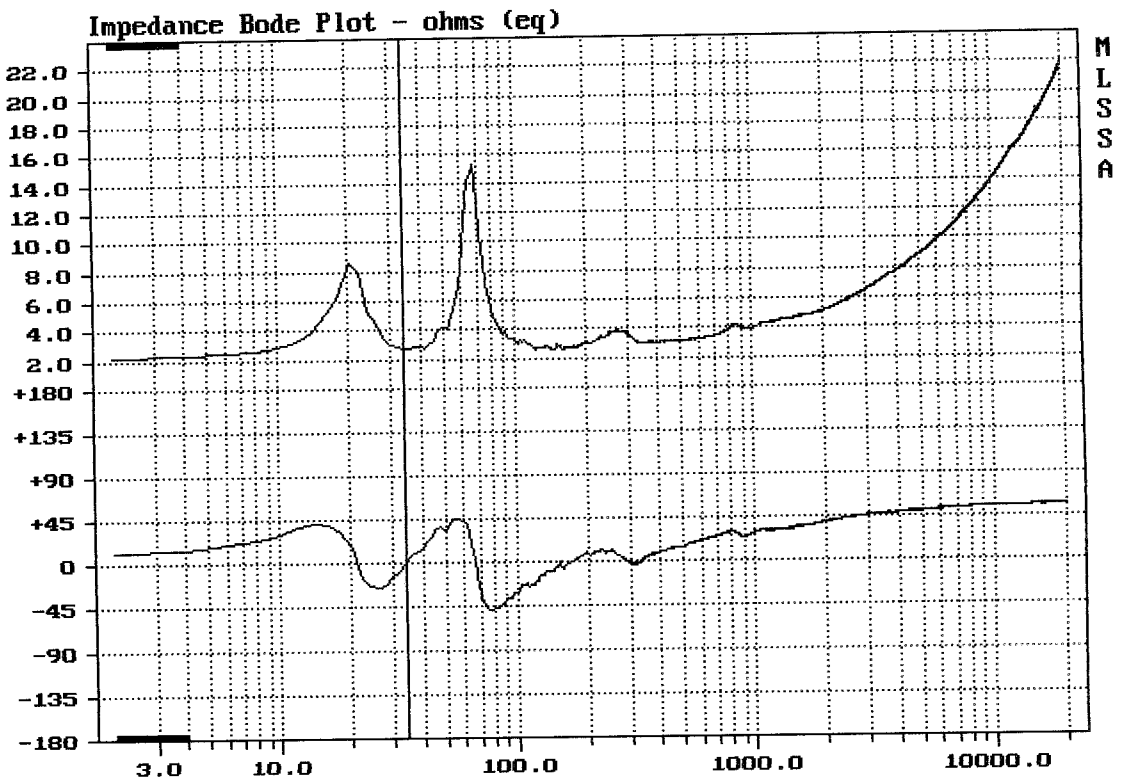


mag 2.7 phase -1.0 deg 34.020 Hz (17)

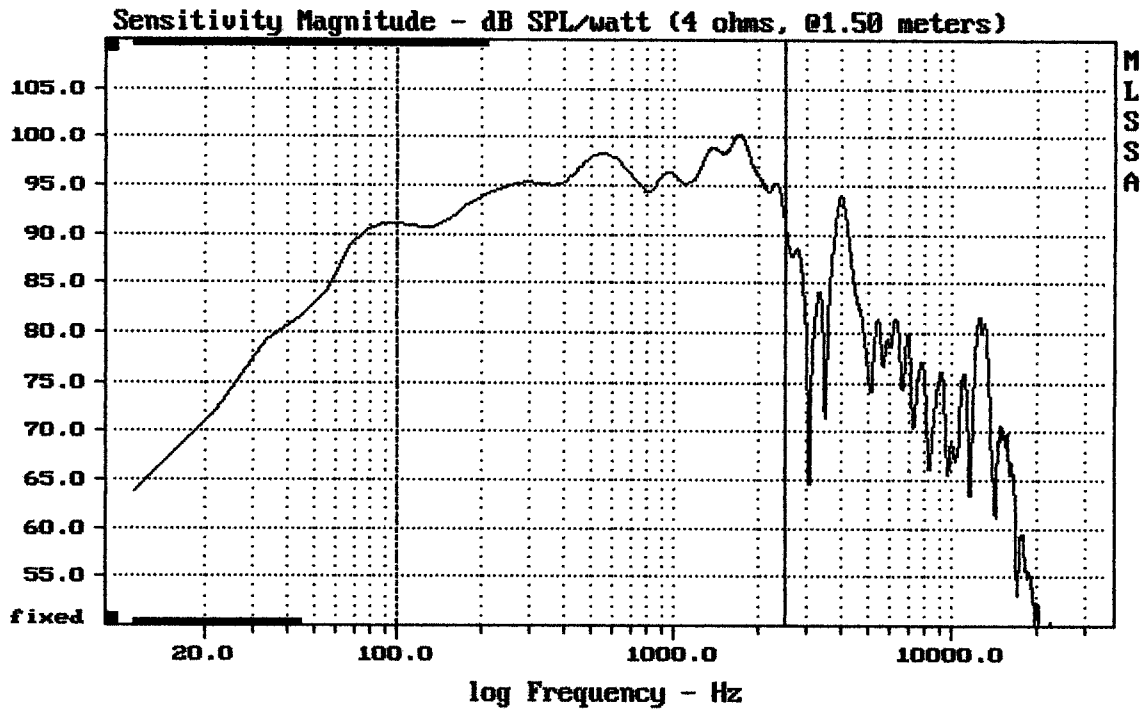

Level (100:2500 Hz) = 95.85 dB SPL/watt (4 ohms, @1.50 meters)

15" NTS250

MLSSA: Frequency Domain

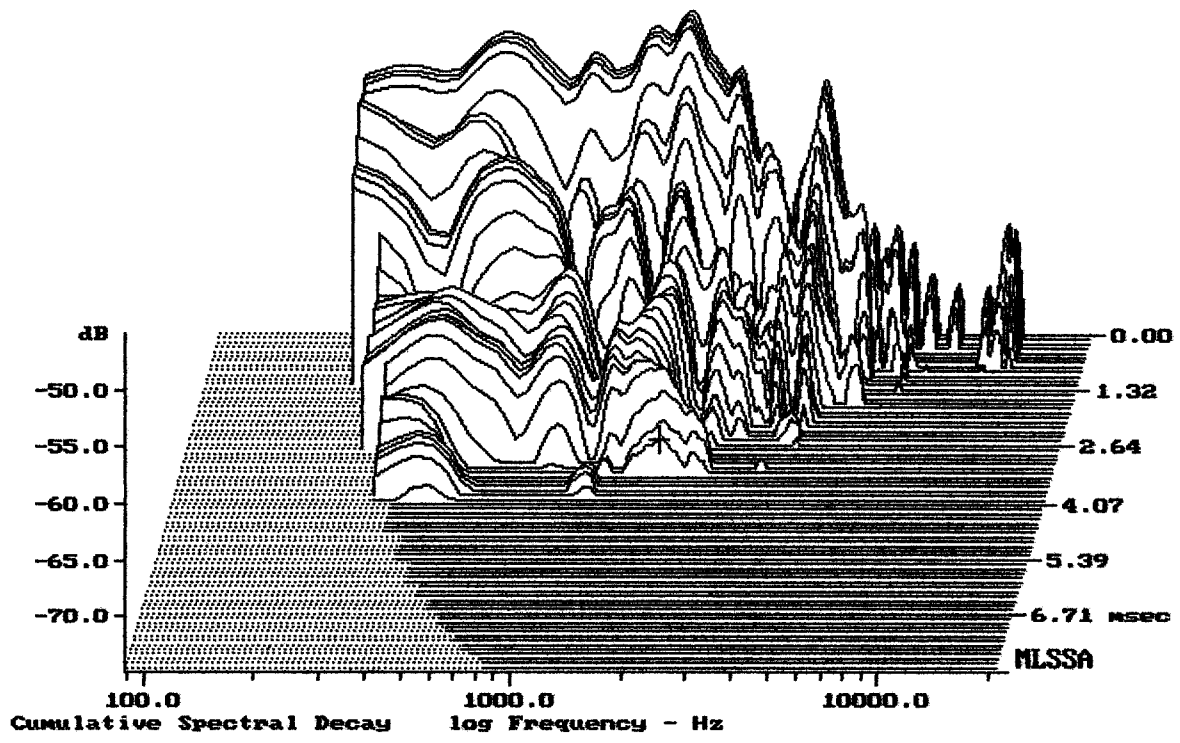

-72.05 dB, 1776 Hz (40), 3.300 msec (31)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.57	Ohms
2	Fs	45.65	Hz
3	Re	3.93	Ohms[dc]
4	Res	84.22	Ohms
5	Qms	8.65	
6	Qes	0.40	
7	Qts	0.39	
8	L1	0.32	mH
9	L2	1.07	mH
10	R2	5.07	Ohms
11	RMSE-load	0.25	Ohms
12	Vas(Sd)	123.85	liters
13	Mms	107.08	grams
14	Cms	114	$\mu\text{M}/\text{Newton}$
15	B1	17.29	Tesla-M
16	SPLref(Sd)	96.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.0% (-20% to -50% is recommended).

15" NTS250

MLSSA: Parameters

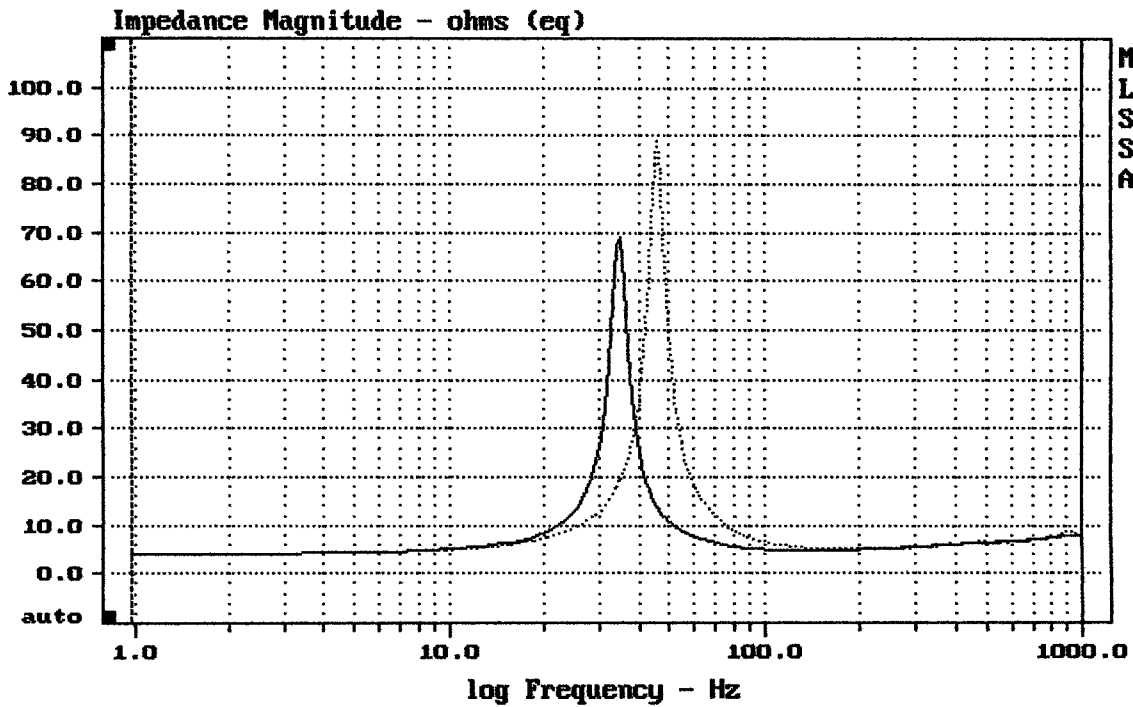

mean: 7.695, rms: 10.21, std: 6.705, max: 88.87, min: 4.079

MLSSA: Frequency Domain