



Level (36:122 Hz) = 104.57 dB SPL/watt (4 ohms, @4.00 meters)

RCF TTS36-A pasiv.

MLSSA: Frequency Domain

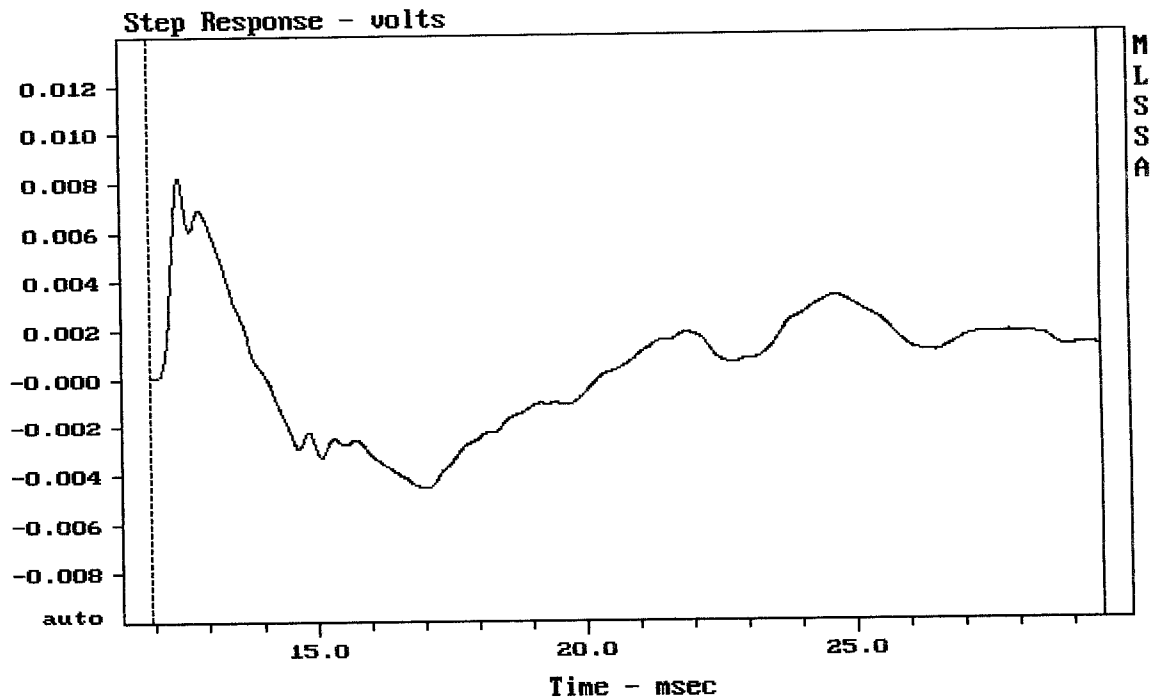


CURSOR: y = 0.00123004 x = 29.5350 (2685)

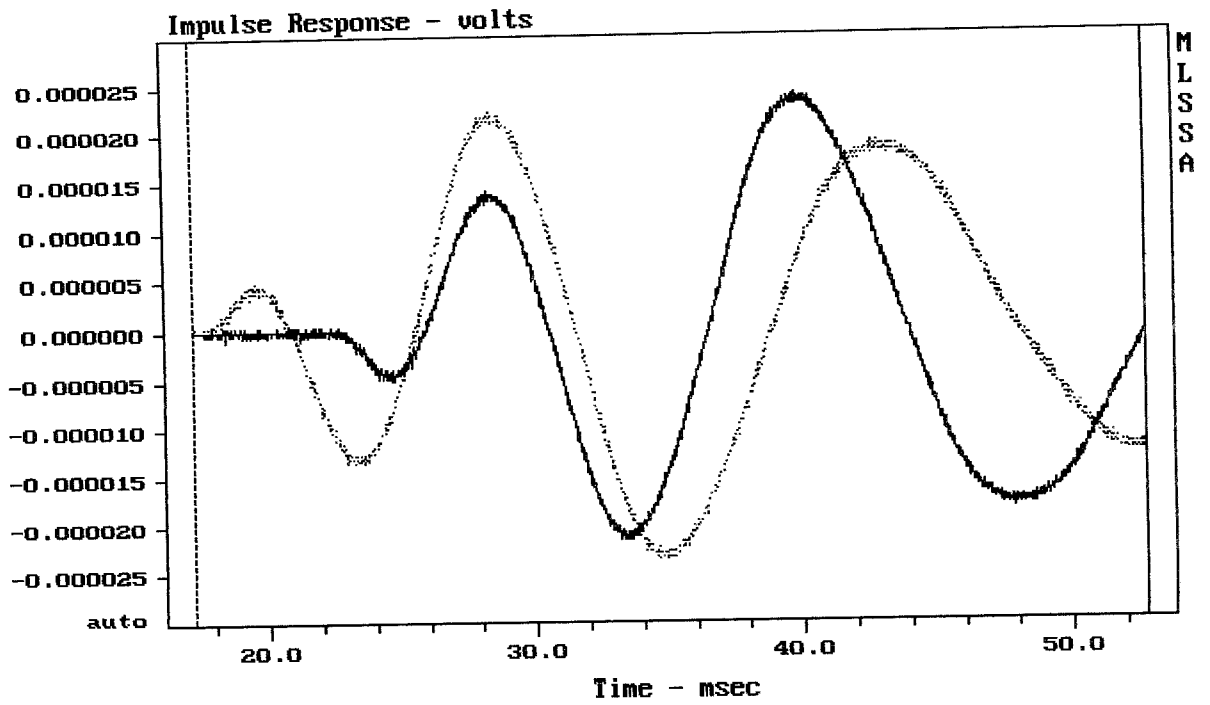

CURSOR: $dy = -1.18302e-005$ $x = 52.7230$ (4793)

RCF TTS36-A norm. / cardioid ----


MLSSA: Time Domain

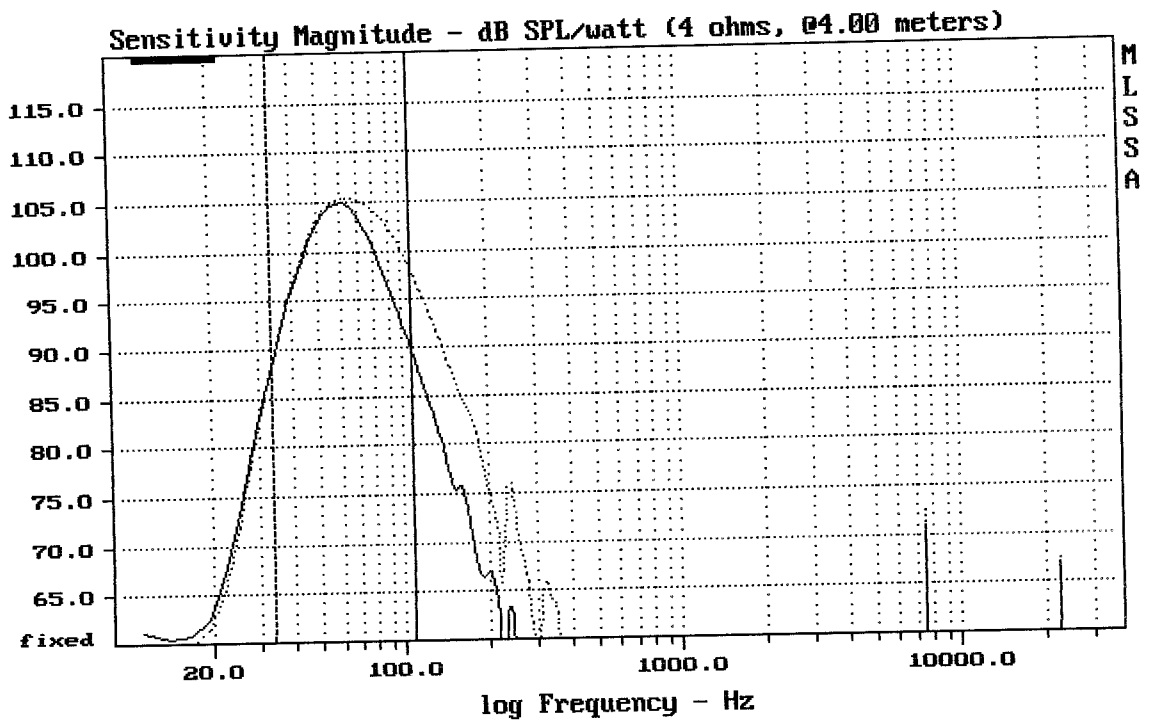

Overlay Compare: dev= +3.2/-5.4, std= 3.1, avg= -3.2


RCF TTS36-A LPF 90Hz ... / 60Hz ---

MLSSA: Frequency Domain

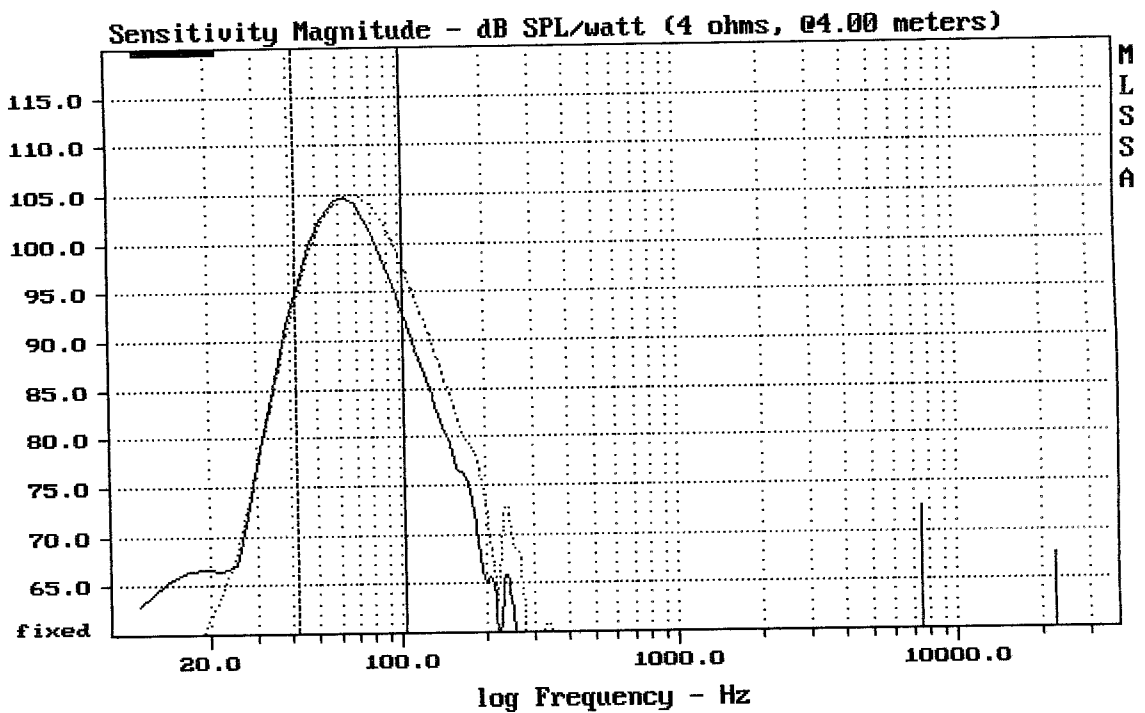

Overlay Compare: dev= +2.6/-3.2, std= 2.2, avg= -1.8


RCF TTS36-A HPF 45 Hz LPF 90 Hz / 60 Hz

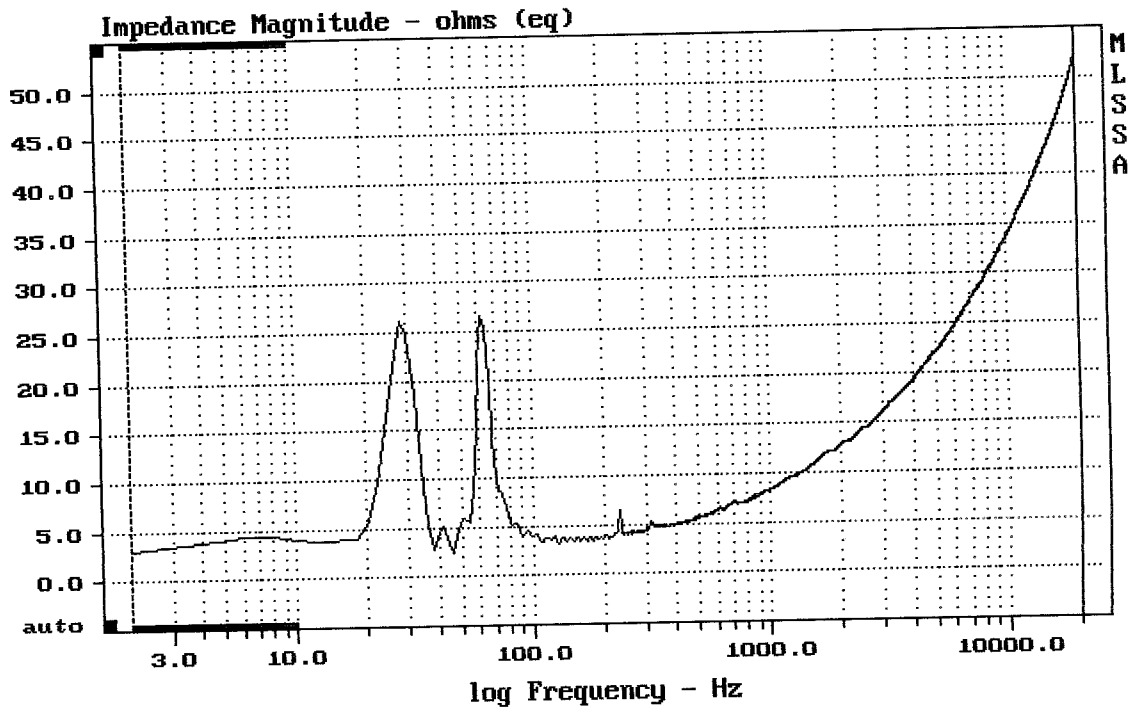


mean: 31.98, rms: 34.5, std: 12.95, max: 52.05, min: 2.334

RCF TTS36-A pasiv

MLSSA: Frequency Domain

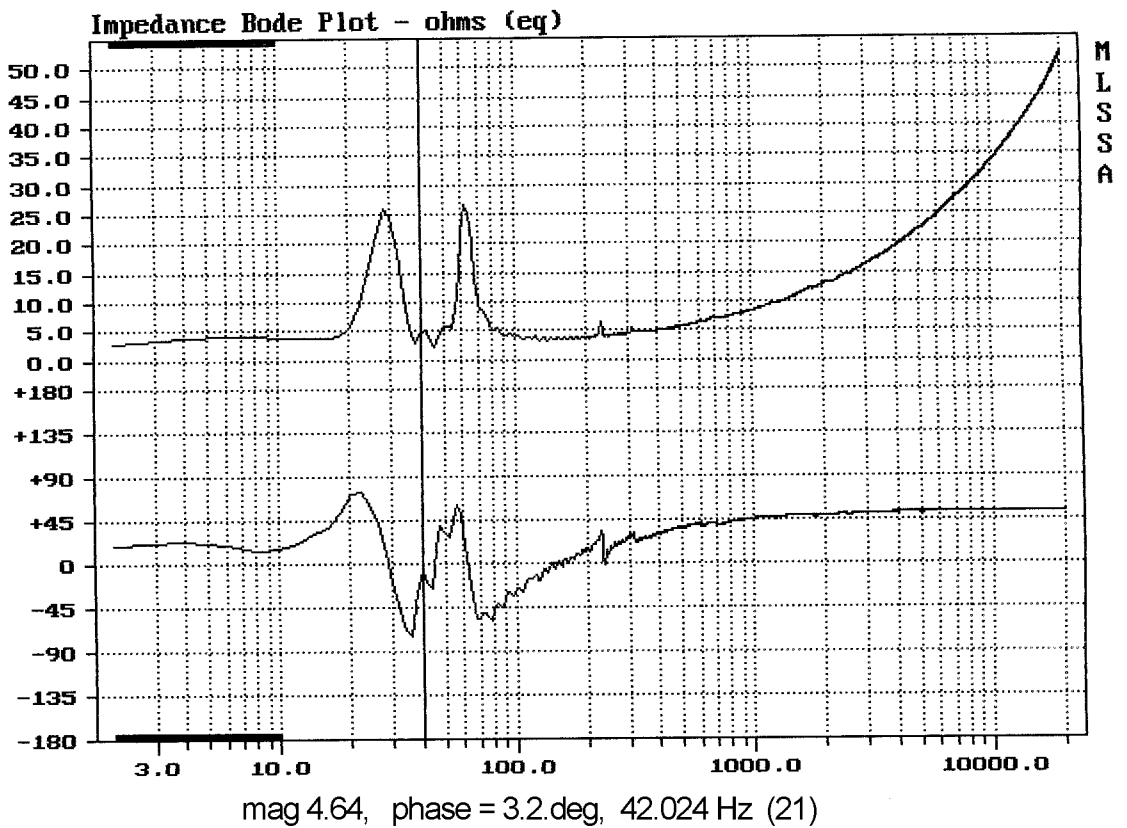


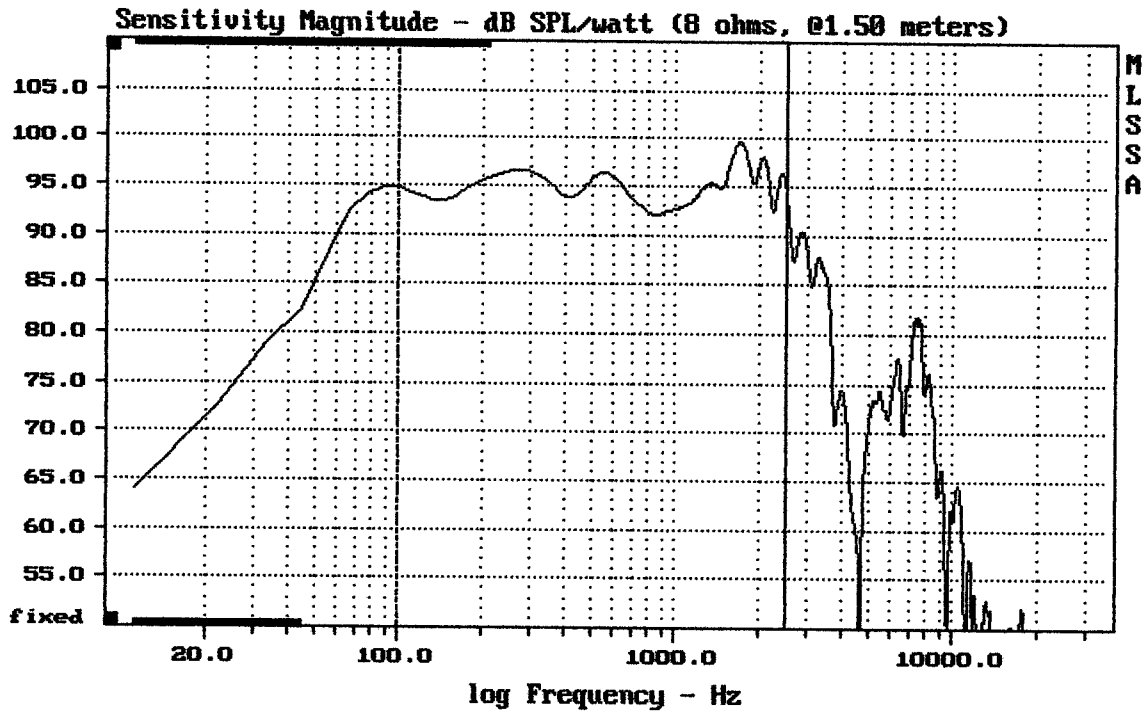

Level (100:2500 Hz) = 95.22 dB SPL/watt (8 ohms, @1.50 meters)

TTS36A

MLSSA: Frequency Domain

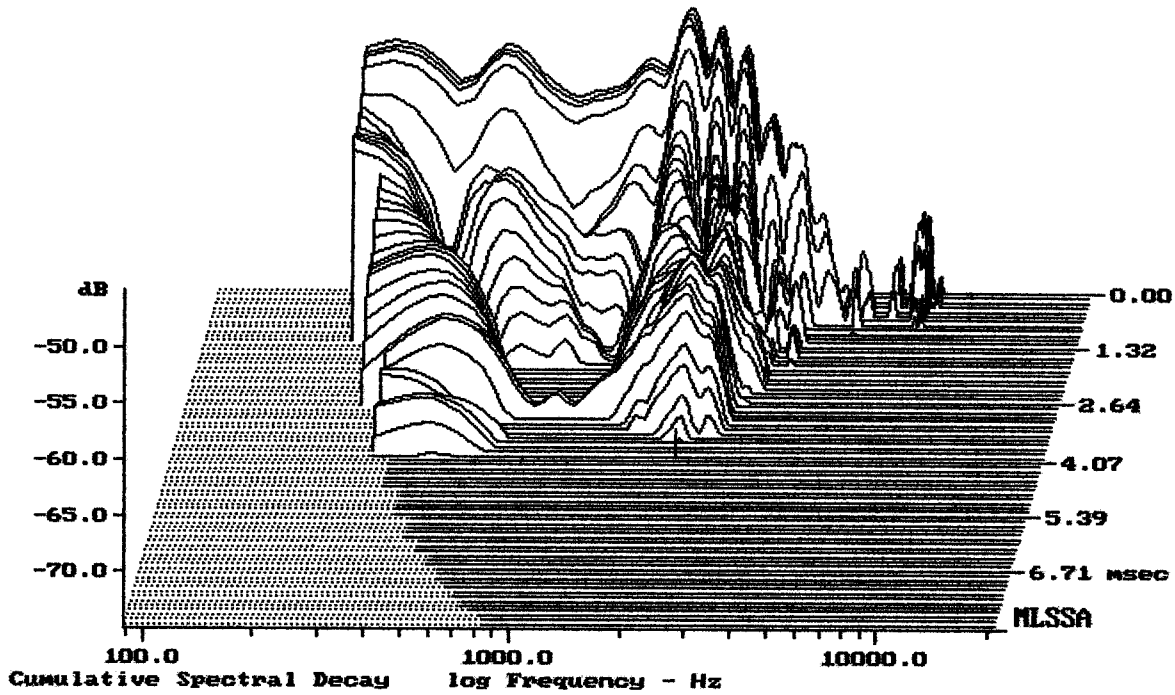

-74.91 dB, 2042 Hz (46), 3.630 msec (34)

DTTO

Measured Data			QC Limits
Line	Parameter	Value	Units
1	RMSE-free	0.51	Ohms
2	Fs	39.63	Hz
3	Re	5.01	Ohms[dc]
4	Res	118.56	Ohms
5	Qms	9.00	
6	Qes	0.38	
7	Qts	0.37	
8	L1	1.38	mH
9	L2	2.26	mH
10	R2	7.38	Ohms
11	RMSE-load	0.47	Ohms
12	Vas(Sd)	166.84	liters
13	Mms	203.91	grams
14	Cms	79	μ M/Newton
15	B1	25.87	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1225.42 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -20.1% (-20% to -50% is recommended).

18" TTS36A

MLSSA: Parameters

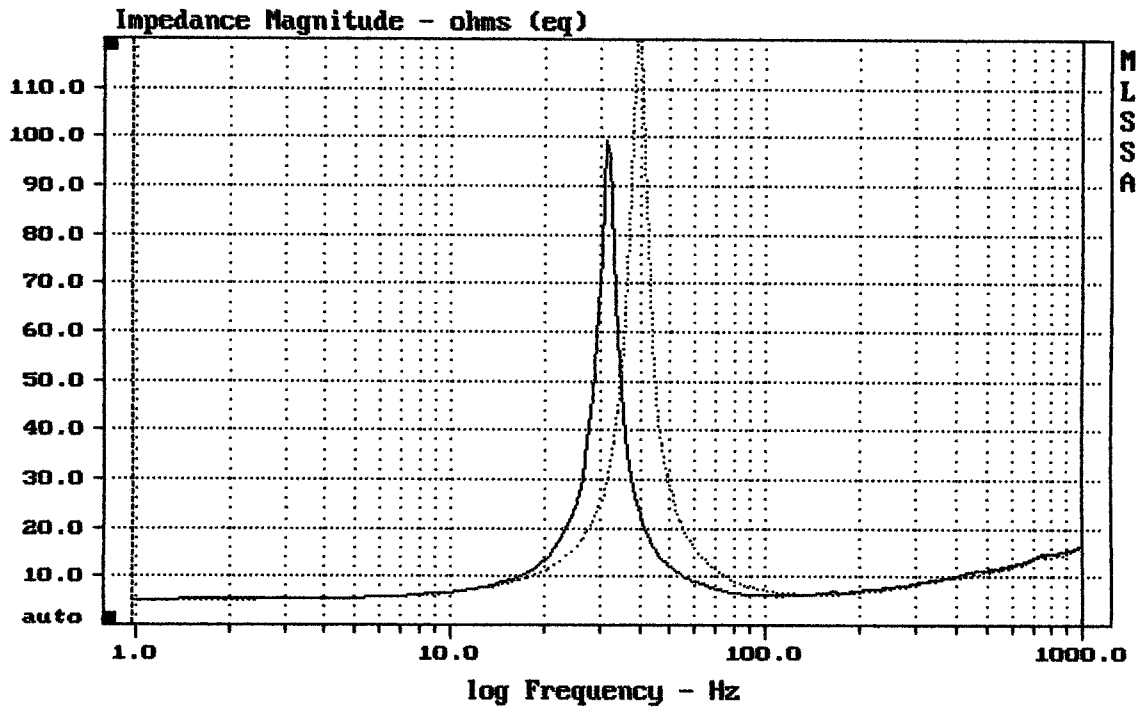

mean: 12.31, rms: 15.09, std: 8.718, max: 120.6, min: 5.001

18" TTS18

MLSSA: Frequency Domain