



---

Level (44:200 Hz) = 98.45 dB SPL/watt (8 ohms, @4.00 meters)

---

EAW JFL118


MLSSA: Frequency Domain

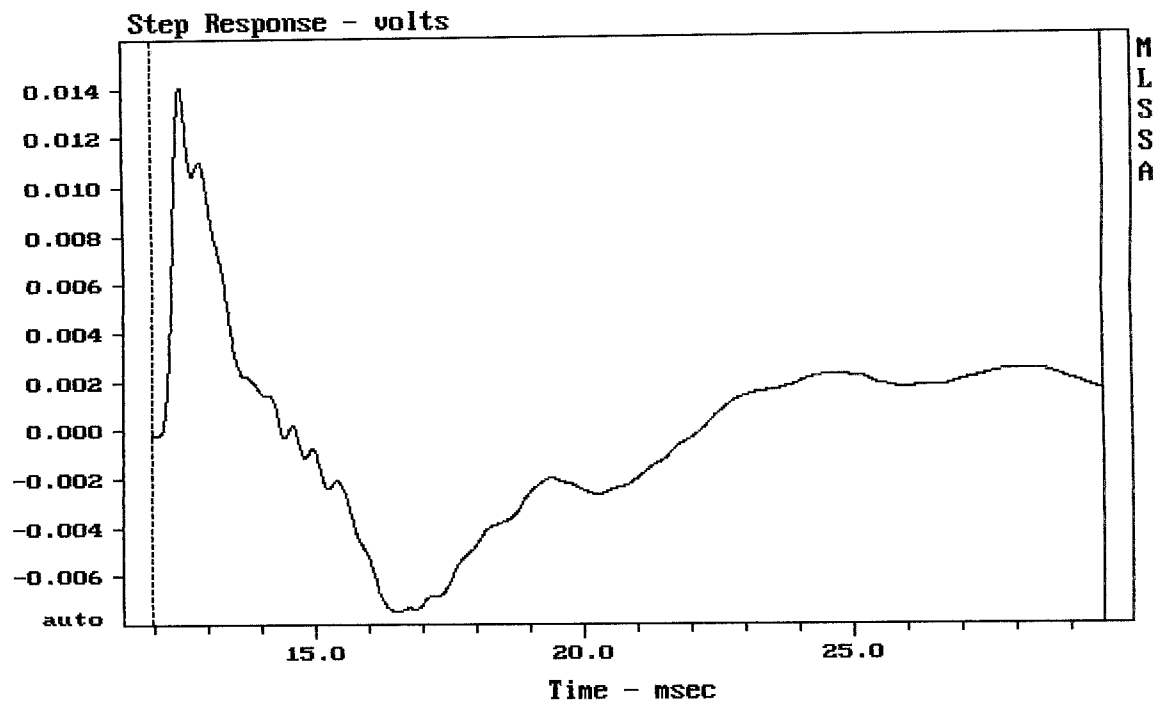


---

CURSOR: y = 0.00155774 x = 29.6230 (2693)

---

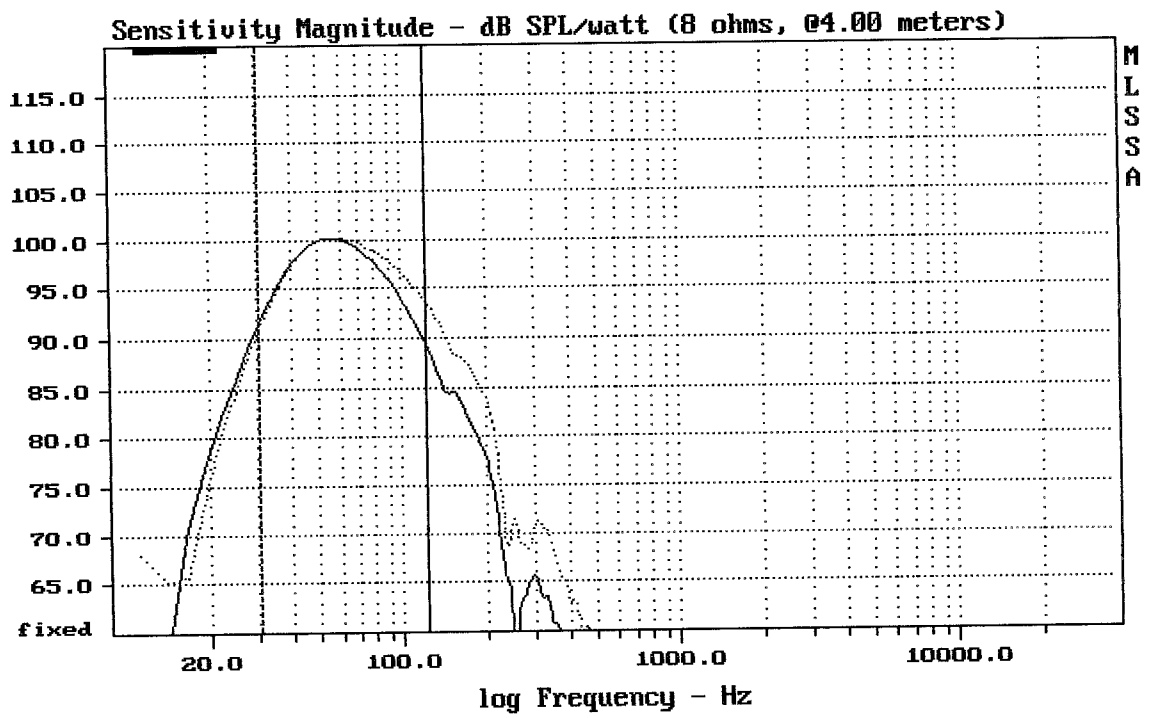



---

Overlay Compare: dev= +1.9/-2.9, std= 1.5, avg= -1.3

---


EAW JFL118 greybox LPF 115Hz ... / 90Hz ---


MLSSA: Frequency Domain

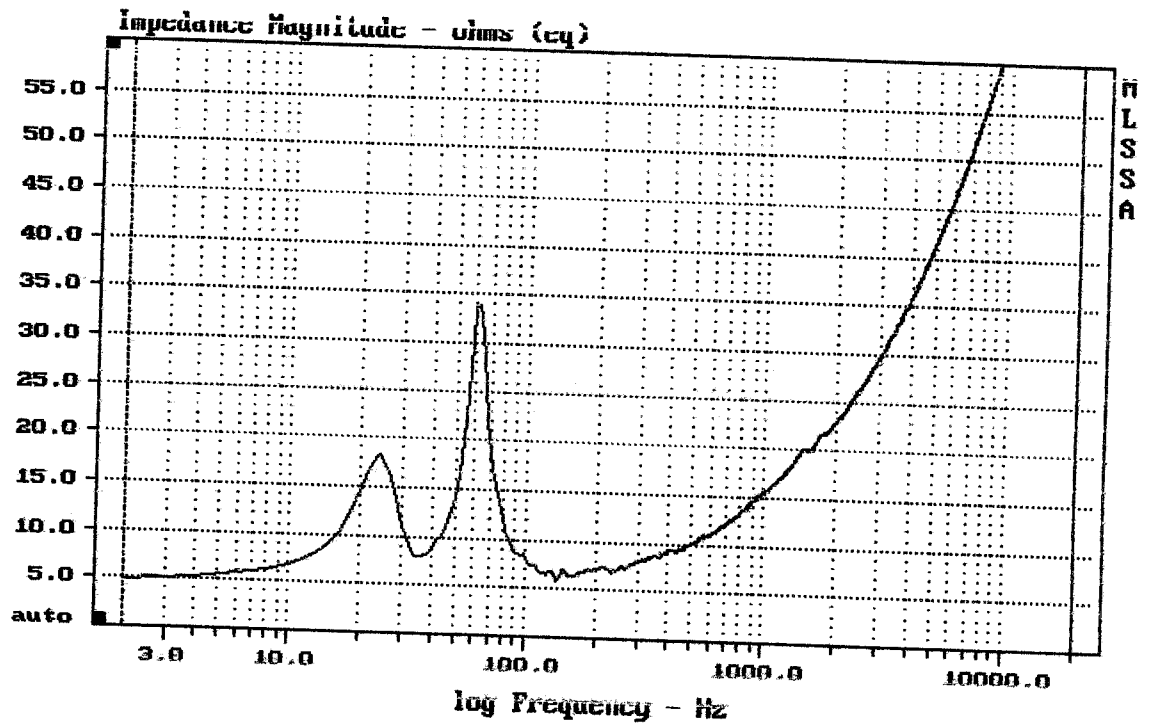

EAM JFL118

MLSSA: Frequency Domain

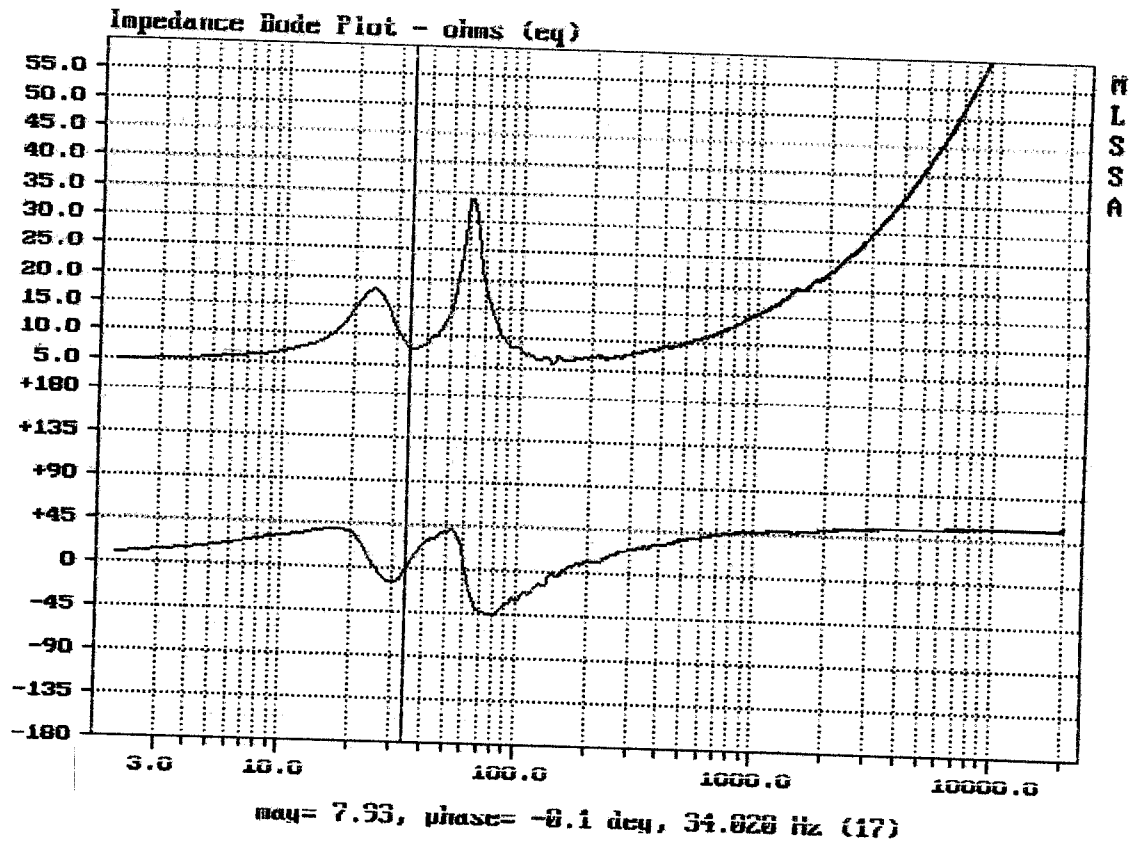


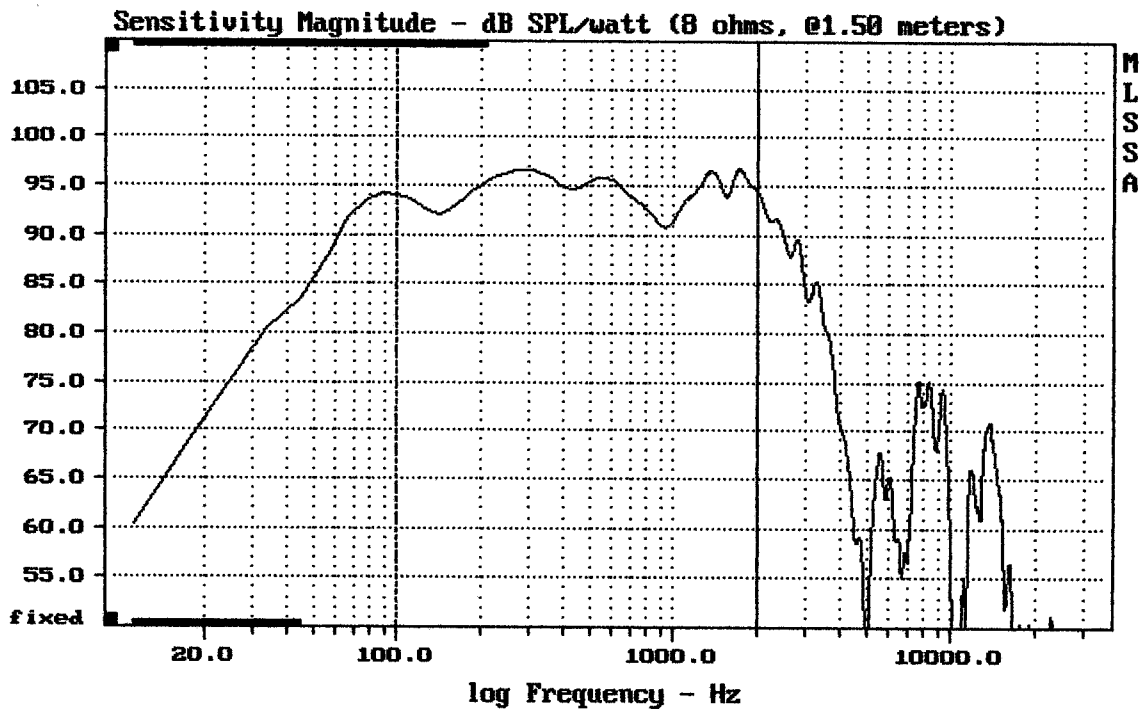

Level (100:2009 Hz) = 94.72 dB SPL/watt (8 ohms, @1.50 meters)

18"JFL118

MLSSA: Frequency Domain

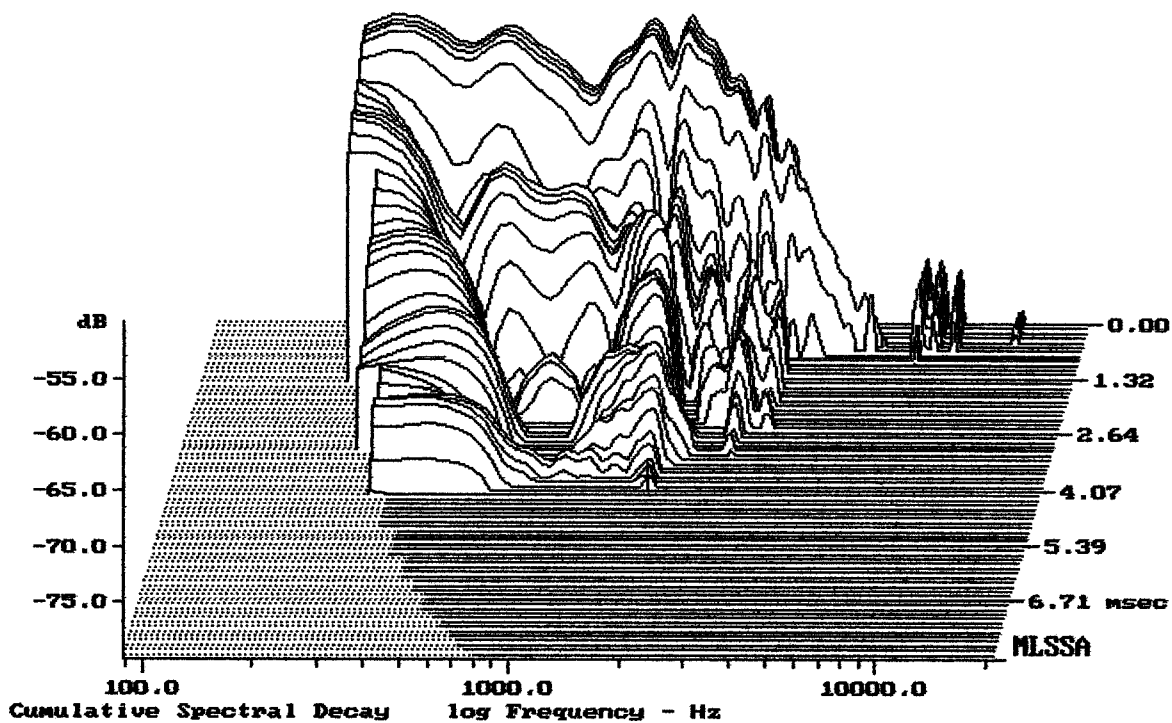

-78.99 dB, 1776 Hz (48), 3.960 msec (37)

DTTO

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.55	Ohms
2	Fs	40.26	Hz
3	Re	5.02	Ohms[dc]
4	Res	73.30	Ohms
5	Qms	6.28	
6	Qes	0.43	
7	Qts	0.40	
8	L1	1.37	mH
9	L2	1.84	mH
10	R2	7.09	Ohms
11	RMSE-load	0.63	Ohms
12	Vas(Sd)	167.63	liters
13	Mms	168.41	grams
14	Cms	93	$\mu\text{M}/\text{Newton}$
15	B1	22.29	Tesla-M
16	SPLref(Sd)	95.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.3% (-20% to -50% is recommended).

JFL118

MLSSA: Parameters

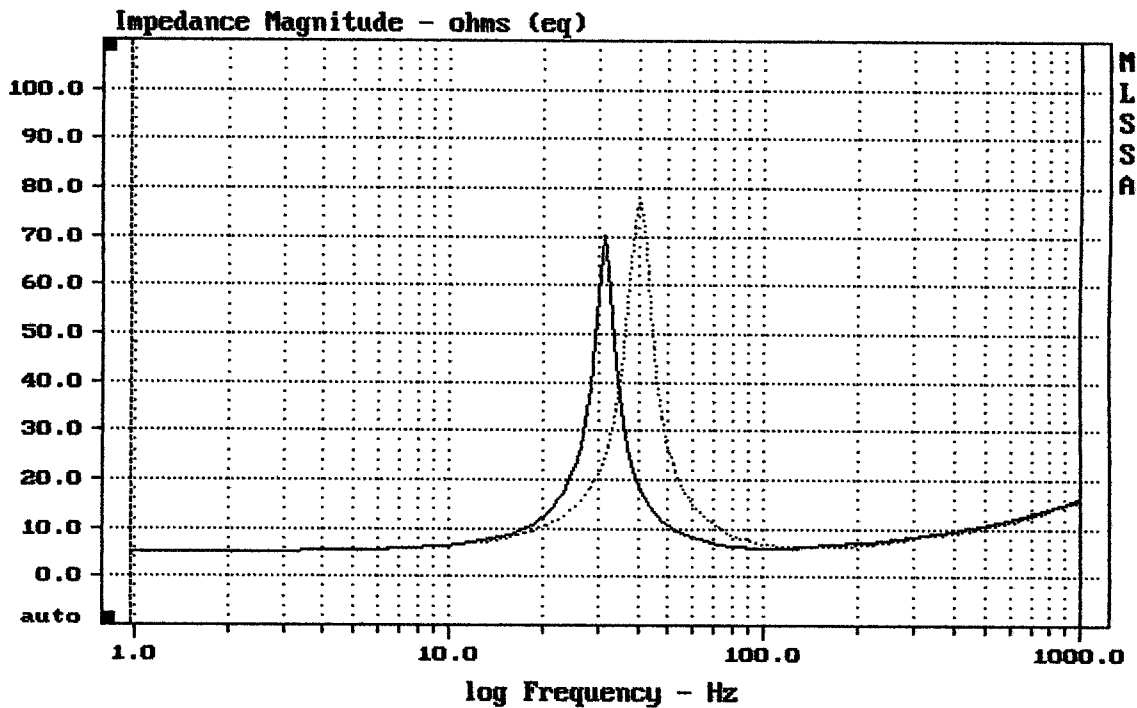

mean: 11.58, rms: 13.23, std: 6.399, max: 77.07, min: 5.111

MLSSA: Frequency Domain