


Level (39:155 Hz) = 102.19 dB SPL/watt (4 ohms, @4.00 meters)


EAWSB730

HL55A: Frequency Domain

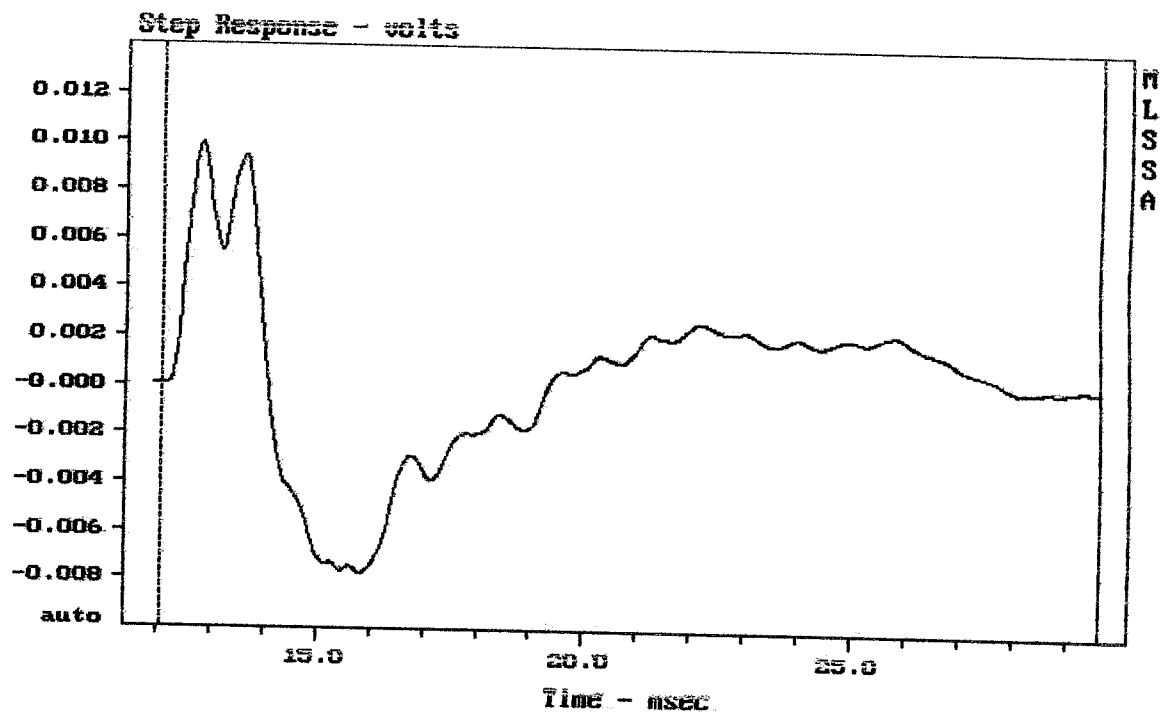

CURSOR: y = 7.73512e-005 x = 29.6230 (2693)


EAWSB730

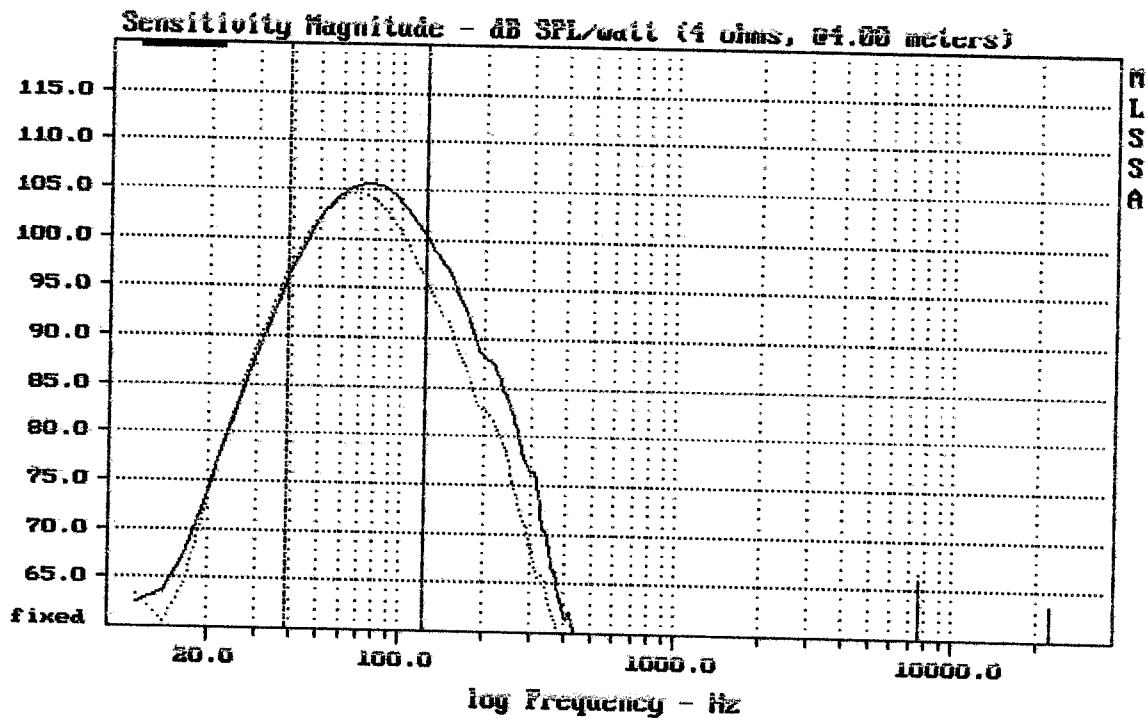

Overlay Compare: dev= +2.7/-2.4, std= 1.7, avg= 1.8

EAW SB730 greybox rev.2 LPF 80Hz ... / 100Hz ---

MLSSA: Frequency Domain

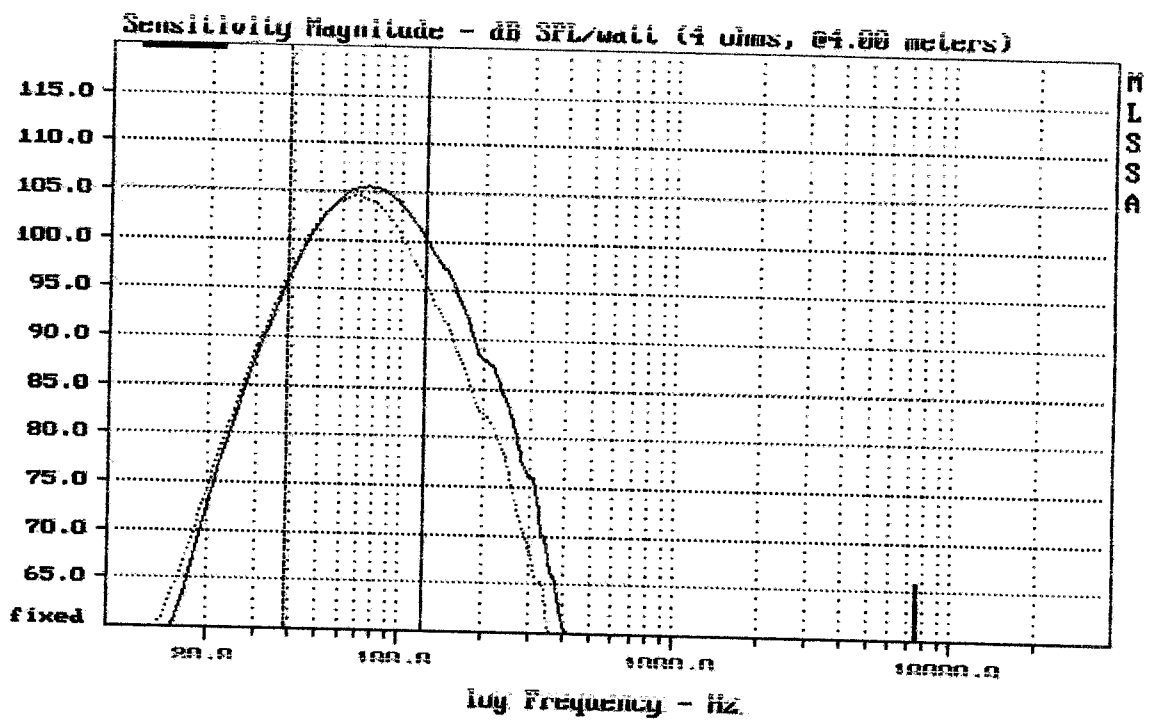

Overlay Compare: dev= +2.7/-2.3, std= 1.7, avg= 1.8

EAW SB730 greybox rev.B LPF 80Hz ... / 100Hz ---

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.36	Ohms
2	Fs	46.82	Hz
3	Re	6.74	Ohms[dc]
4	Res	68.96	Ohms
5	Qms	4.99	
6	Qes	0.49	
7	Qts	0.44	
8	L1	1.12	mH
9	L2	1.78	mH
10	R2	6.05	Ohms
11	RMSE-load	0.81	Ohms
12	Vas(Sd)	81.27	liters
13	Mms	60.74	grams
14	Cms	190	$\mu$ M/Newton
15	B1	15.71	Tesla-M
16	SPLref(Sd)	94.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.9% (-20% to -50% is recommended).

12" EAW SB730

MLSSA: Parameters

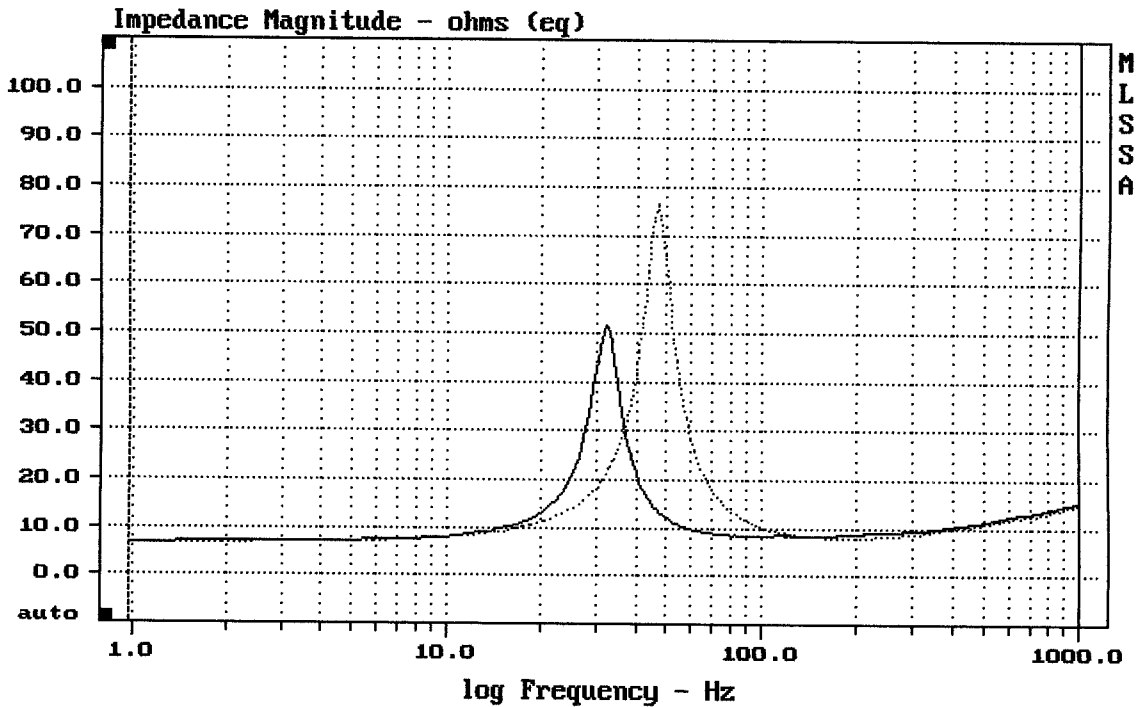

mean: 12.39, rms: 14.15, std: 6.839, max: 76.62, min: 6.816

MLSSA: Frequency Domain