


Level (100:4006 Hz) = 96.72 dB SPL/watt (4 ohms, @1.00 meters)

NX M12A MKII

MLSSA: Frequency Domain

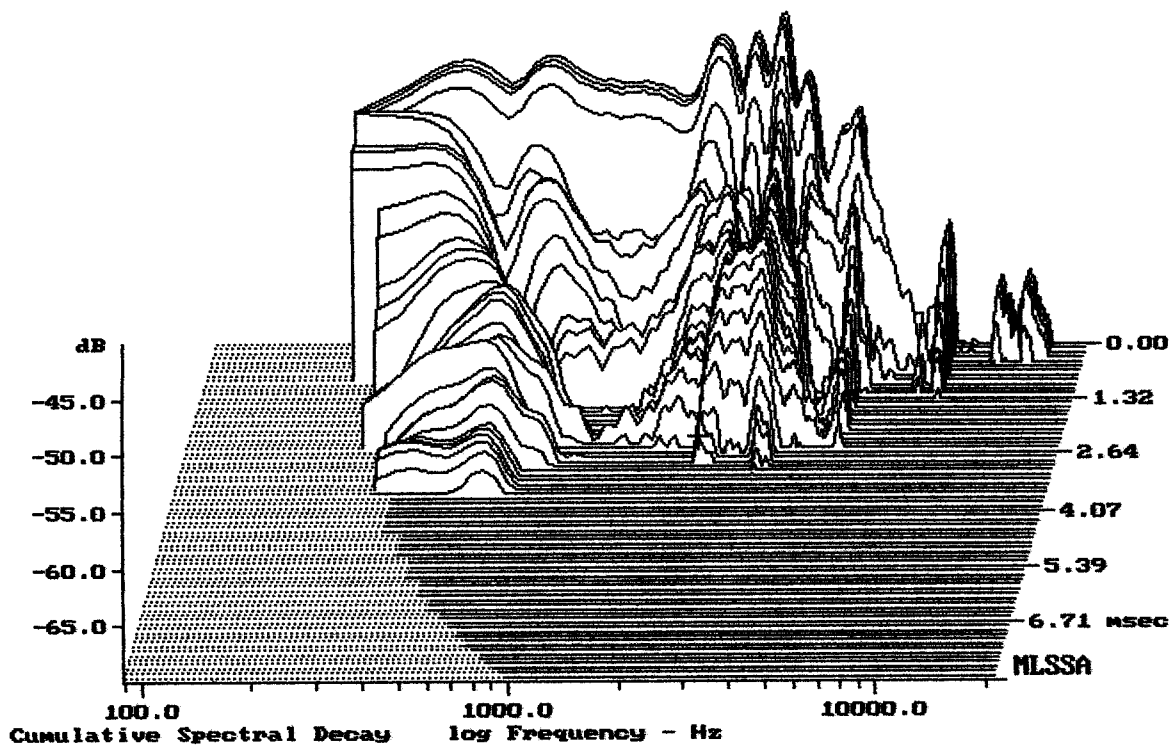

-67.75 dB, 2264 Hz (51), 2.868 msec (27)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.37	Ohms
2	Fs	65.47	Hz
3	Re	2.75	Ohms[dc]
4	Res	62.47	Ohms
5	Qms	7.50	
6	Qes	0.33	
7	Qts	0.32	
8	L1	0.46	mH
9	L2	0.83	mH
10	R2	2.25	Ohms
11	RMSE-load	0.19	Ohms
12	Vas(Sd)	55.70	liters
13	Mms	42.01	grams
14	Cms	141	$\mu\text{M}/\text{Newton}$
15	B1	12.00	Tesla-M
16	SPLref(Sd)	98.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.14 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -39.7% (-20% to -50% is recommended).

NX M12-A MKII

MLSSA: Parameters

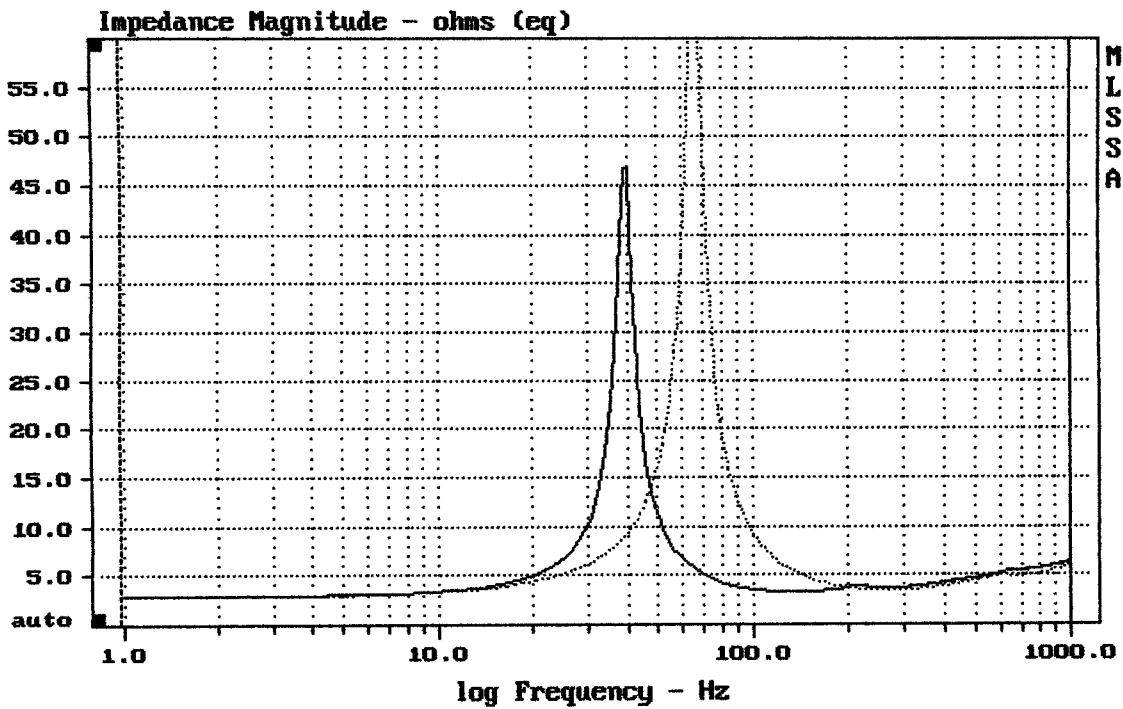

mean: 5.927, rms: 8.627, std: 6.269, max: 65.29, min: 2.894

DTTO

MLSSA: Frequency Domain