


mean: 14.03, rms: 18.81, std: 12.53, max: 70.58, min: 7.306


RCF NX S21-A

MLSSA: Frequency Domain

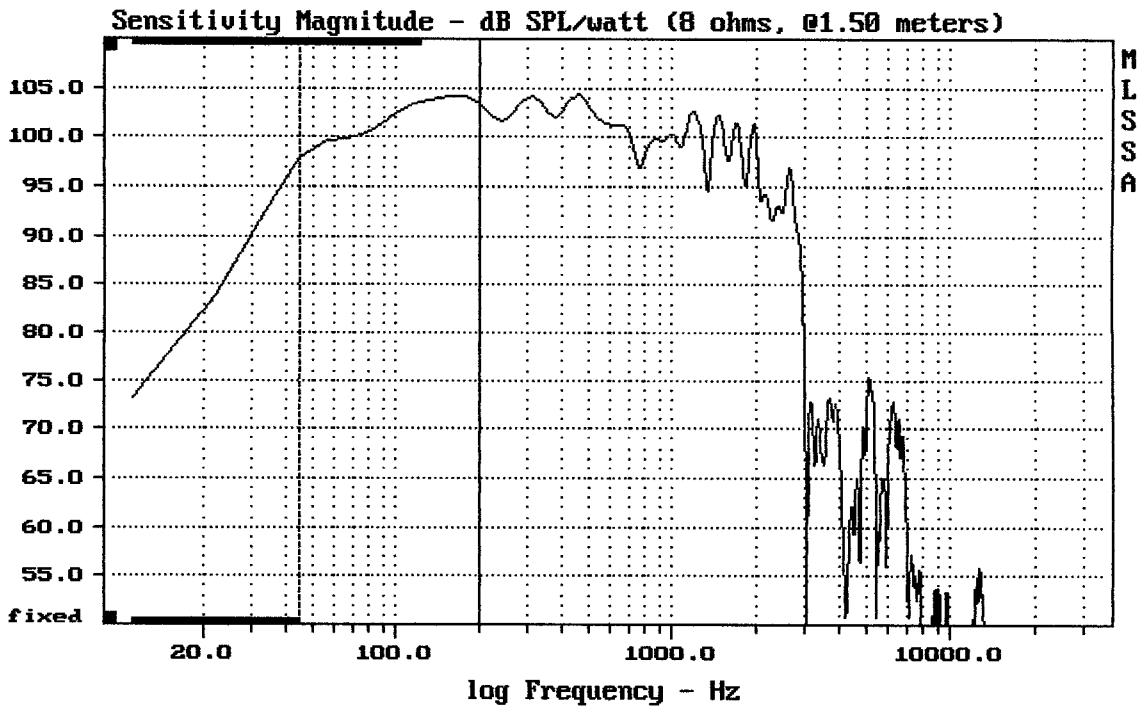

Level (44:200 Hz) = 101.98 dB SPL/watt (8 ohms, @1.50 meters)


RCF NX S21-A bez zesilovace

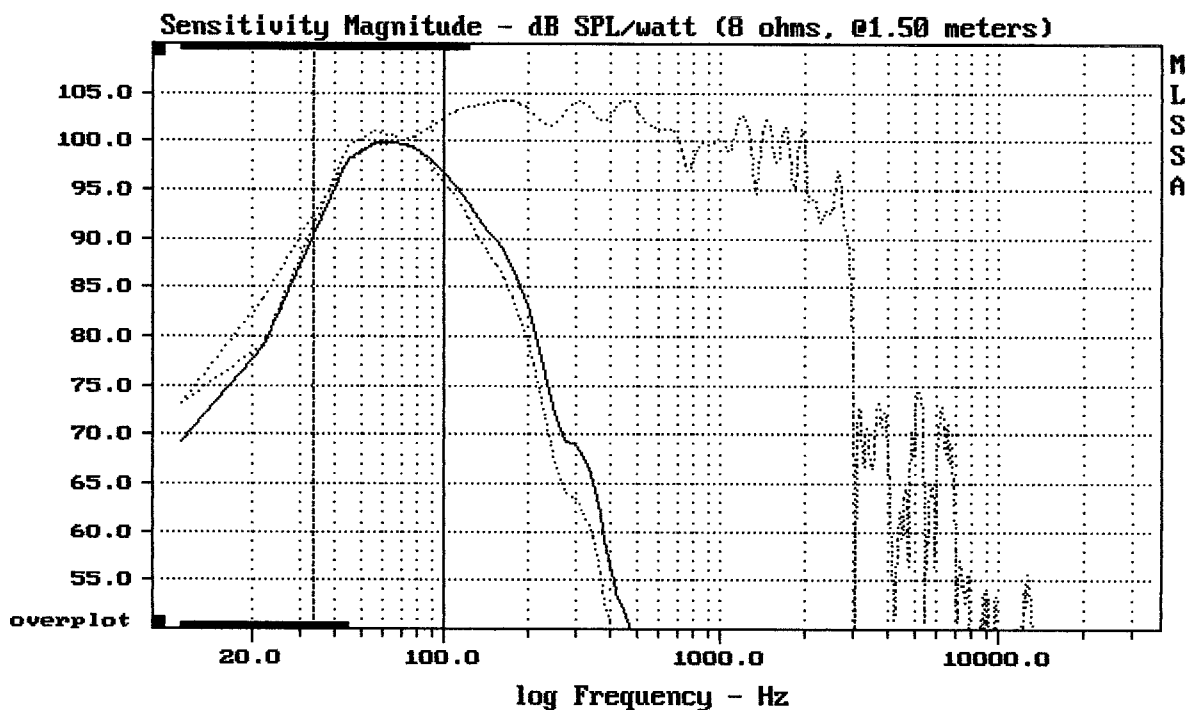

Overlay Compare: dev= +2.7/-5.2, std= 2.7, avg= -1.3

RCF NX S-21A ...pasivne / --- X-0 120Hz / -.-.- X-0 80Hz

MLSSA: Frequency Domain

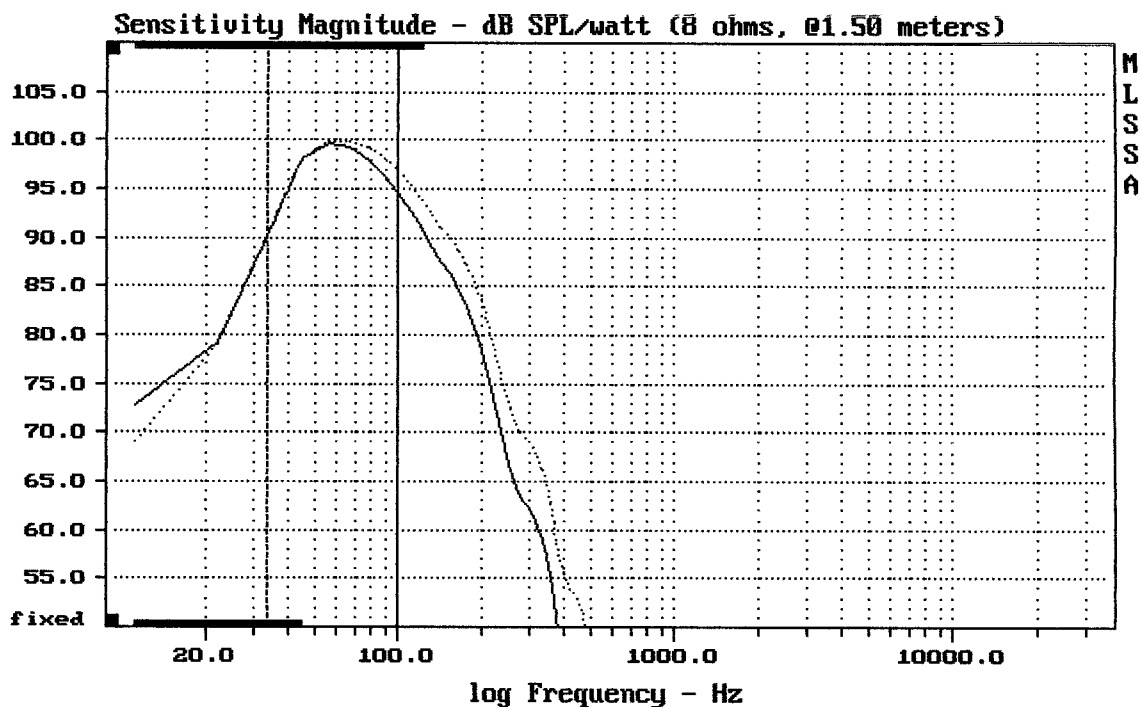

Overlay Compare: dev= +0.86/-1.3, std= 0.77, avg= -0.92

RCF NX S-21A ...X-0 120Hz / ---X-0 80Hz -cca 1.5dB

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.93	Ohms
2	Fs	37.07	Hz
3	Re	5.80	Ohms[dc]
4	Res	133.30	Ohms
5	Qms	8.95	
6	Qes	0.39	
7	Qts	0.37	
8	L1	1.49	mH
9	L2	2.64	mH
10	R2	8.58	Ohms
11	RMSE-load	0.99	Ohms
12	Vas(Sd)	254.12	liters
13	Mms	306.67	grams
14	Cms	60	μM/Newton
15	B1	32.62	Tesla-M
16	SPLref(Sd)	97.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (260.00 grams)

Area (Sd): 1734.94 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.3% (-20% to -50% is recommended).


21" FROM NXS21-A

MLSSA: Parameters

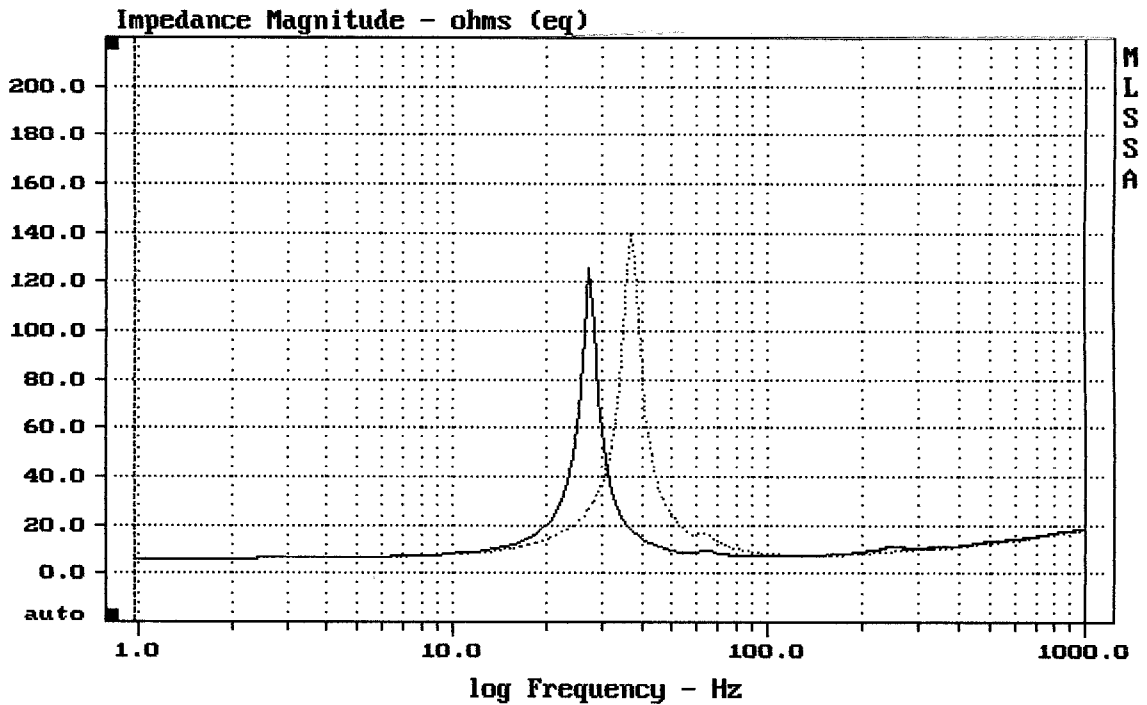

mean: 14, rms: 16.92, std: 9.498, max: 139.9, min: 5.859


MLSSA: Frequency Domain

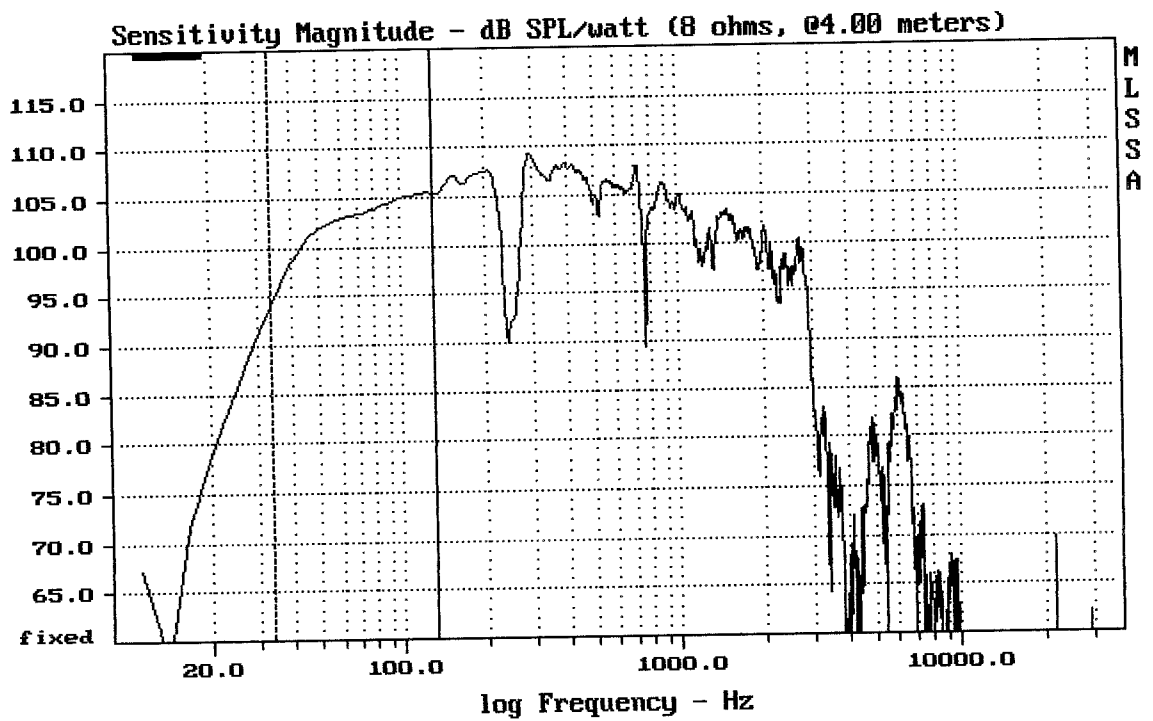


Level (33:130 Hz) = 103.08 dB SPL/watt (8 ohms, @4.00 meters)

RCF NXS21-A pasiv

MLSSA: Frequency Domain

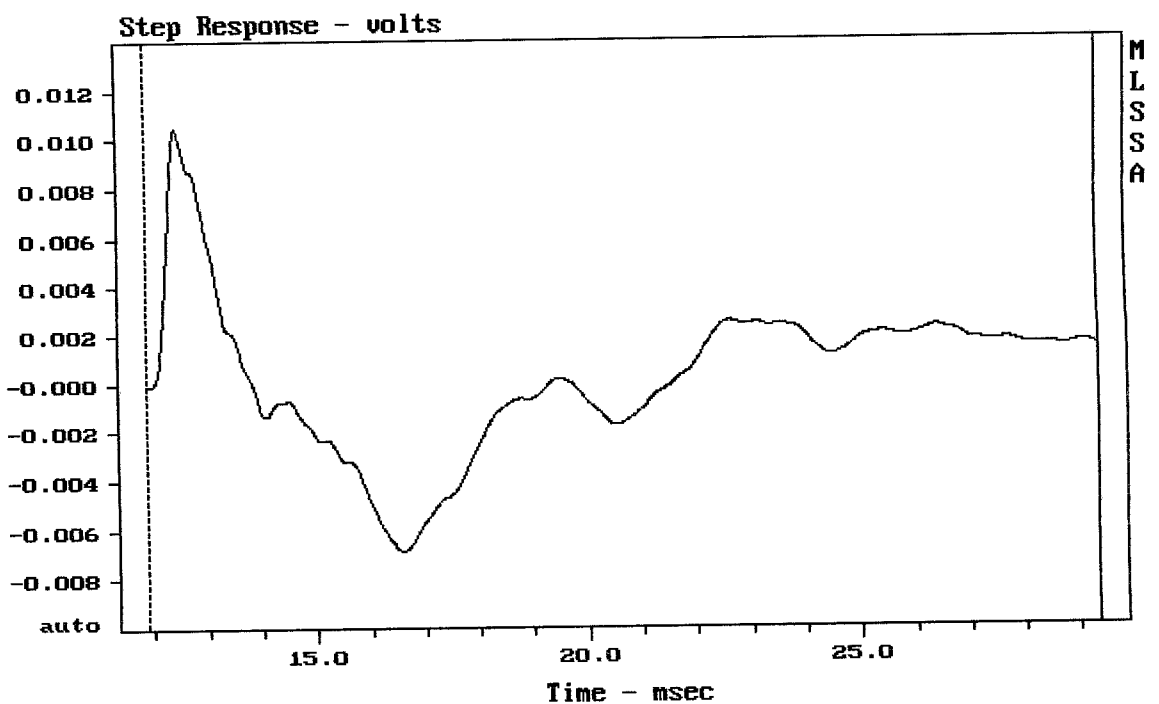


CURSOR: y = 0.00144394 x = 29.3370 (2667)

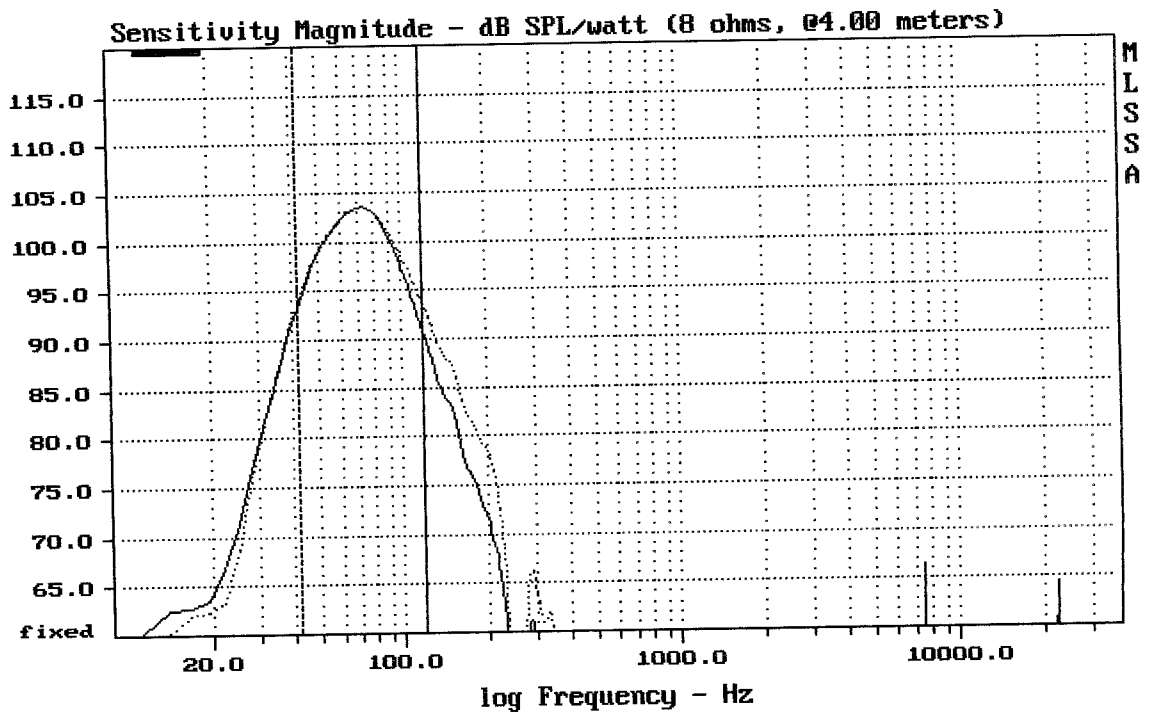


RCF NXS21-A LPF 80Hz ... / 120Hz ---

MLSSA: Frequency Domain

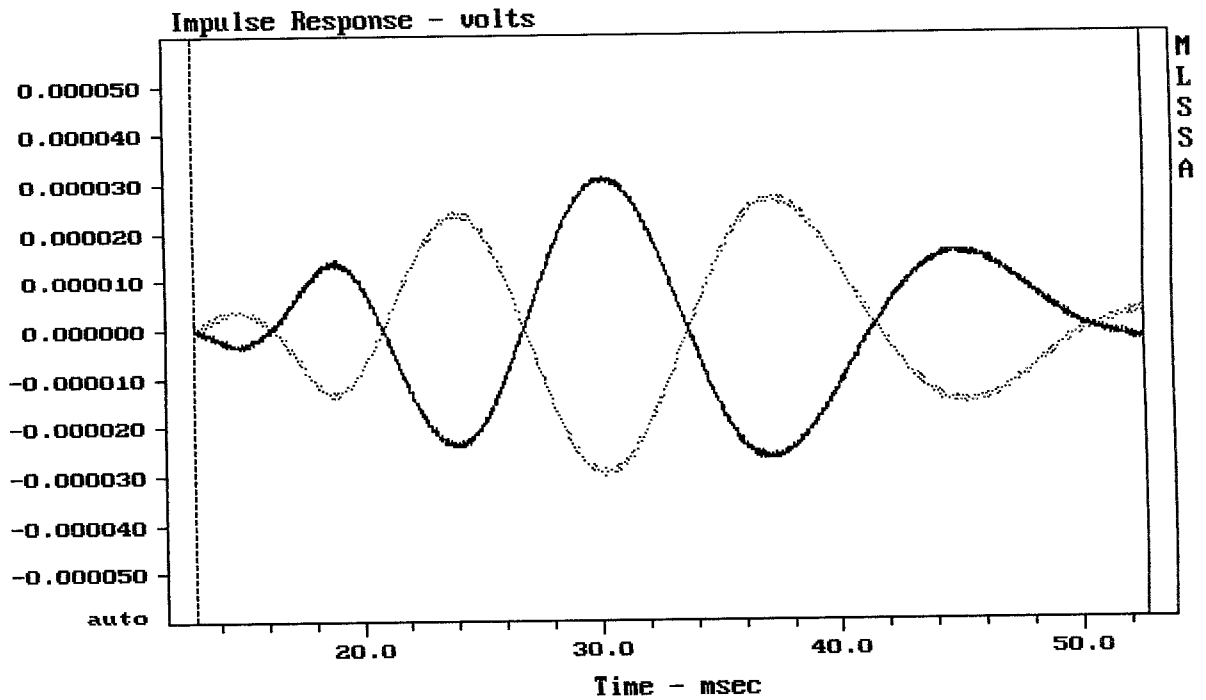


RCF NXS21-A polarity norm / invert

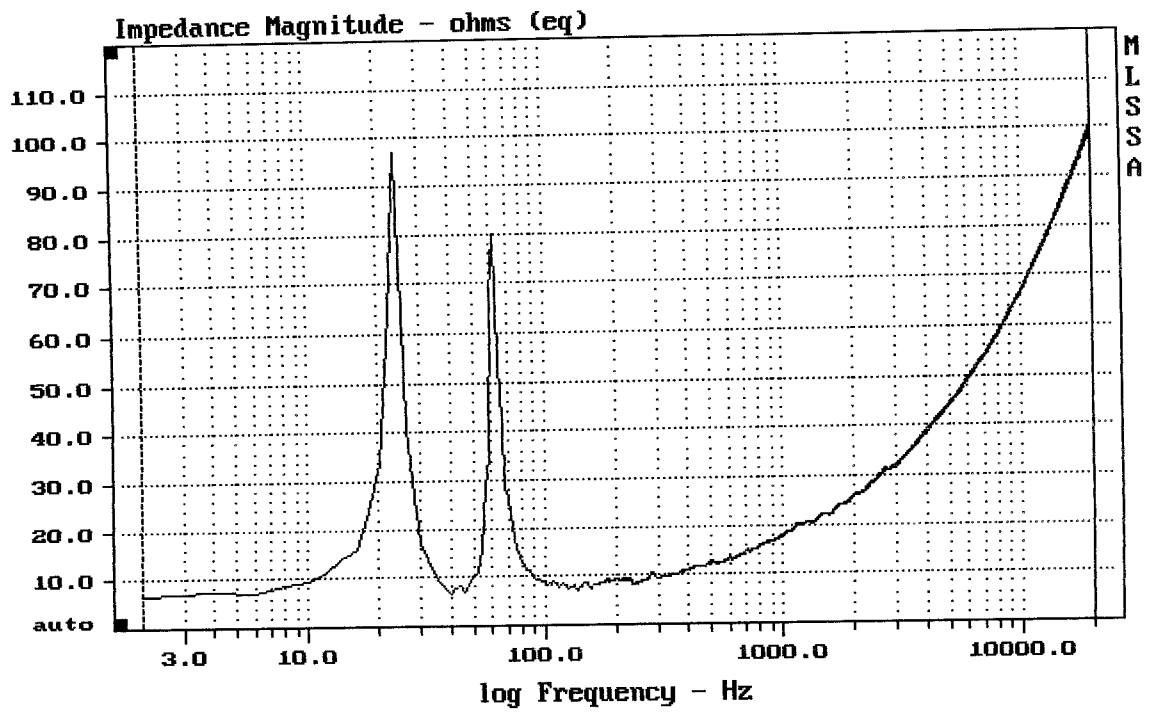

mean: 63.24, rms: 67.99, std: 24.96, max: 100.8, min: 6.565

RCF NXS21-A pasiv.

MLSSA: Frequency Domain

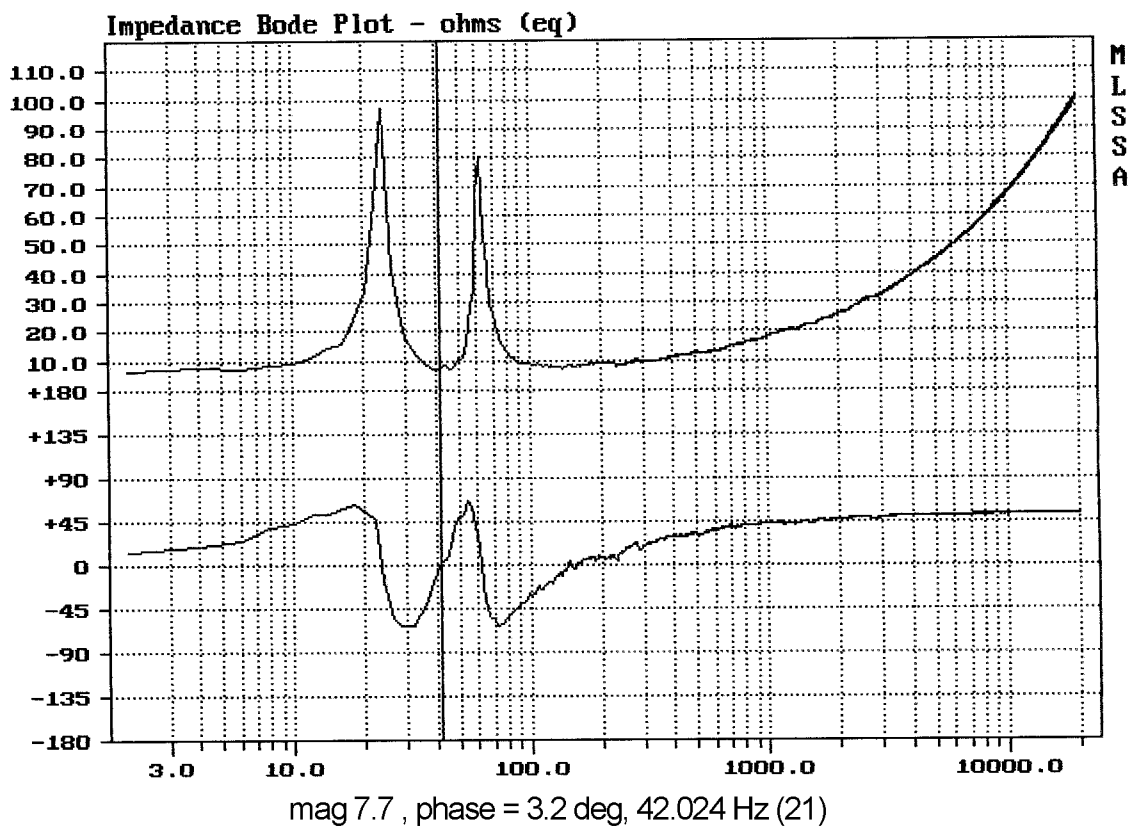

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.03	Ohms
2	Fs	34.17	Hz
3	Re	5.70	Ohms[dc]
4	Res	190.89	Ohms
5	Qms	11.19	
6	Qes	0.33	
7	Qts	0.32	
8	L1	1.48	mH
9	L2	2.63	mH
10	R2	8.27	Ohms
11	RMSE-load	0.77	Ohms
12	Vas(Sd)	347.91	liters
13	Mms	275.08	grams
14	Cms	79	$\mu\text{M}/\text{Newton}$
15	B1	31.73	Tesla-M
16	SPLref(Sd)	98.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (160.00 grams)

Area (Sd): 1772.05 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -20.5% (-20% to -50% is recommended).

NX S21A

MLSSA: Parameters

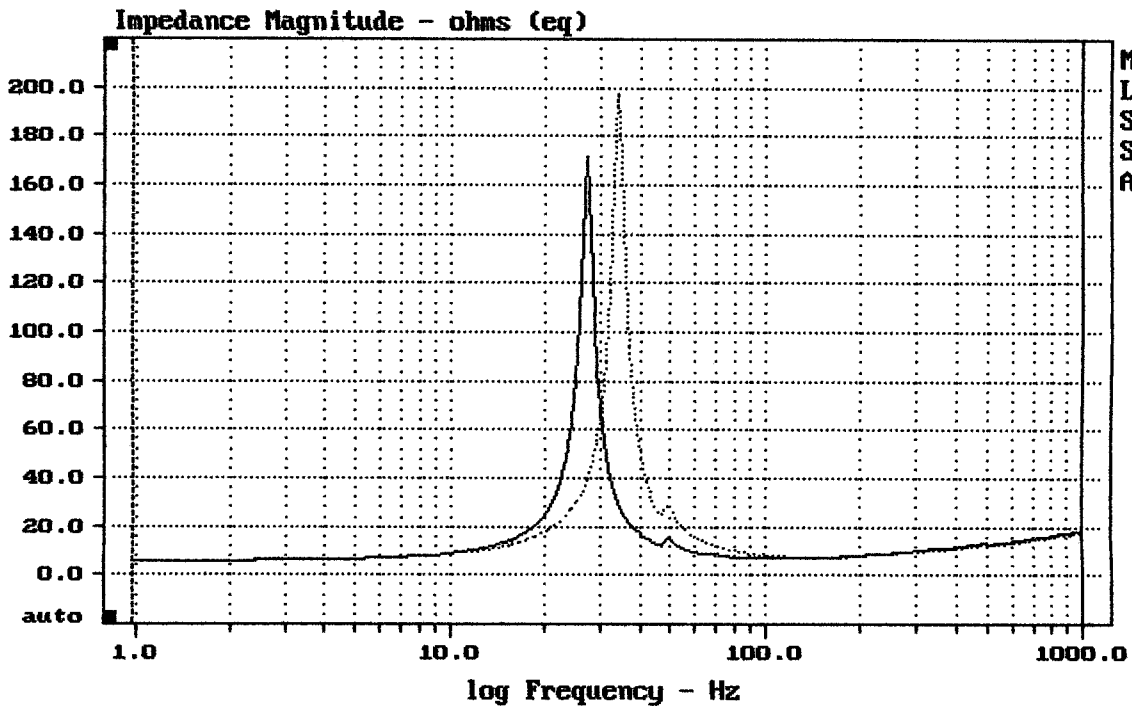

mean: 14.89, rms: 18.45, std: 11.91, max: 197.4, min: 5.849

MLSSA: Frequency Domain