


Level (89:20000 Hz) = 94.67 dB SPL/watt (8 ohms, @1.55 meters)


RCF M801

MLSSA: Frequency Domain

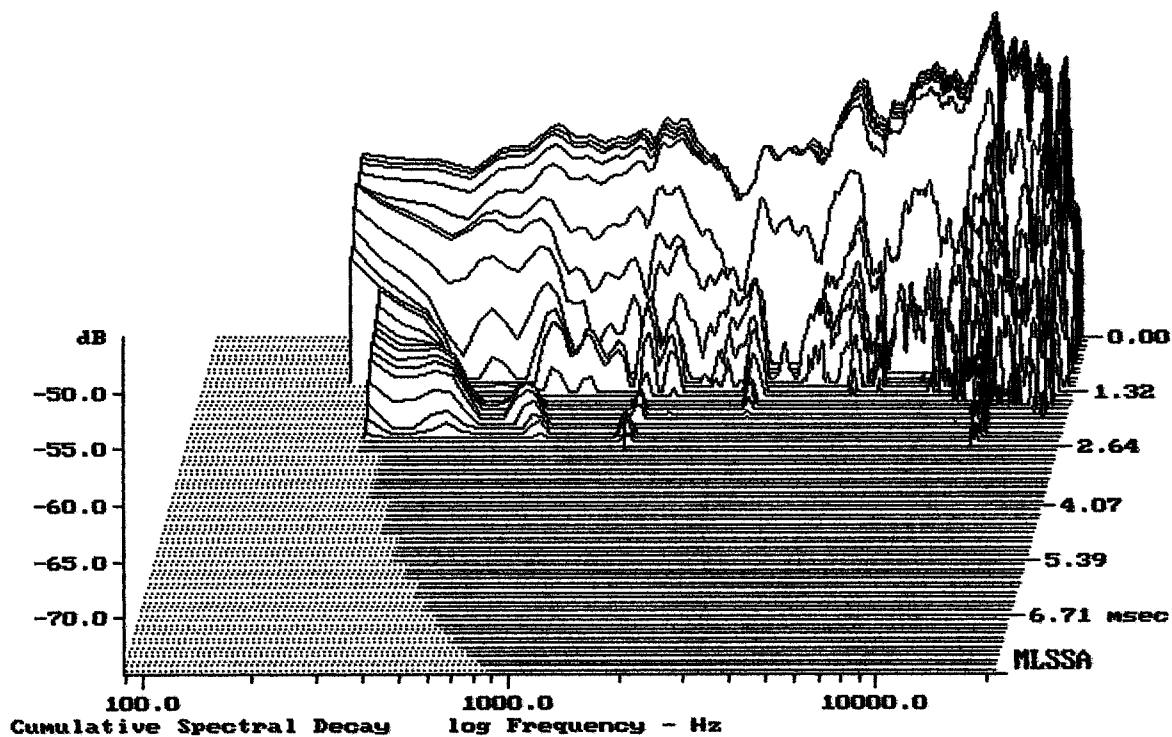

-74.36 dB, 1376 Hz (31), 2.530 msec (24)


DITO

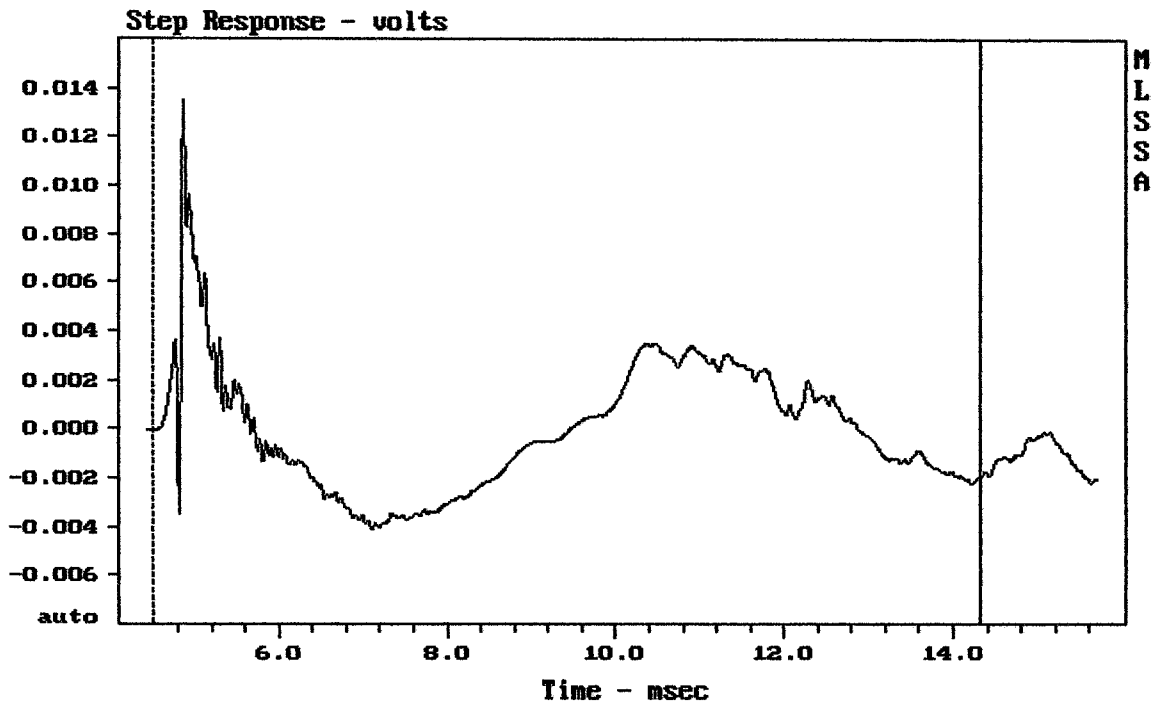

mean: $-5.387e-005$, rms: 0.002577, std: 0.002576, max: 0.01349, min: -0.004094

RCF M801


MLSSA: Time Domain

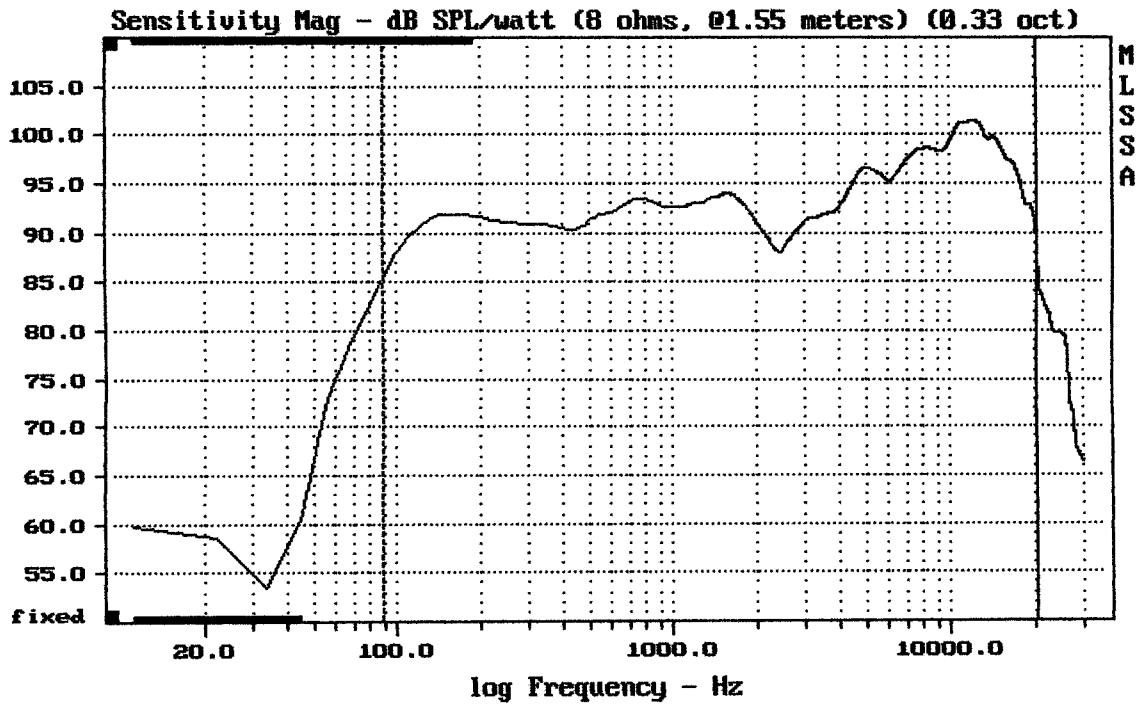

mean: 97.03, rms: 97.59, std: 2.74, max: 101.46, min: 85.48

RCF M801


MLSSA: Frequency Domain

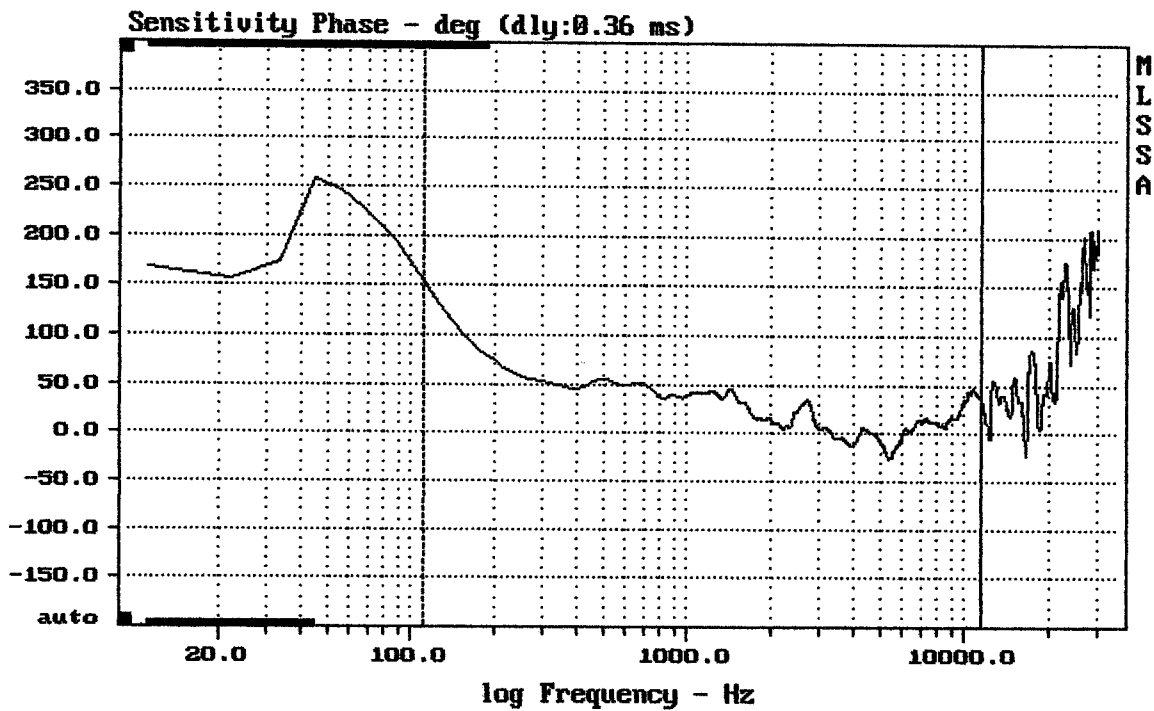

mean: 16.67, rms: 27.01, std: 21.25, max: 154.6, min: -26.08

RCF M801

MLSSA: Frequency Domain

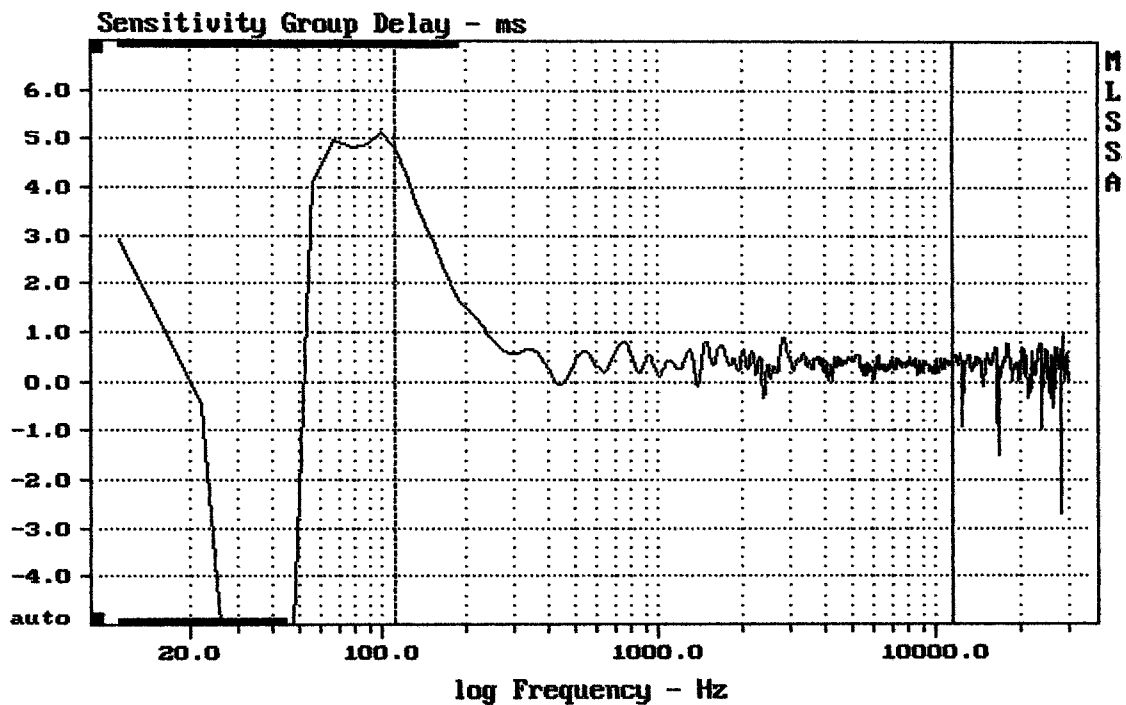


mean: 0.3861, rms: 0.4902, std: 0.302, max: 4.828, min: -0.3131

RCF M801

MLSSA: Frequency Domain

Sensitivity Mag - dB SPL/watt (8 ohms, @1.55 meters) (0.33 oct)

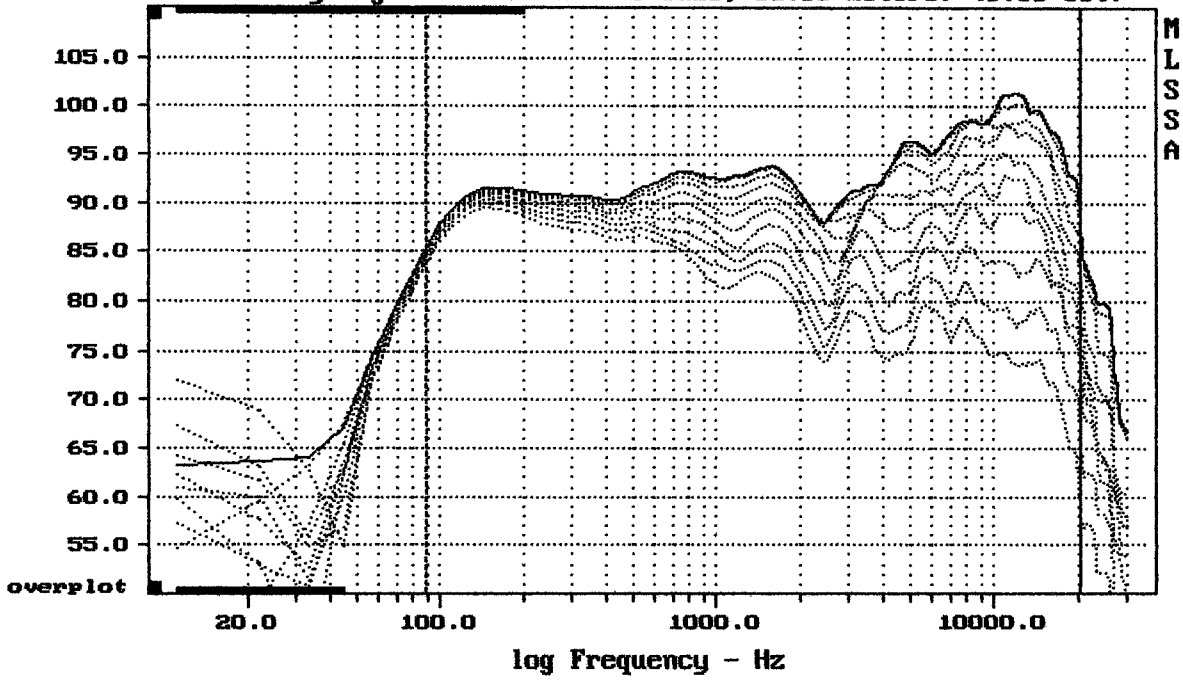


Overlay Compare: dev= +20/-8.2, std= 6.3, avg= -22

RCF M801

MLSSA: Frequency Domain


Sensitivity Mag - dB SPL/watt (8 ohms, @1.55 meters) (0.33 oct)

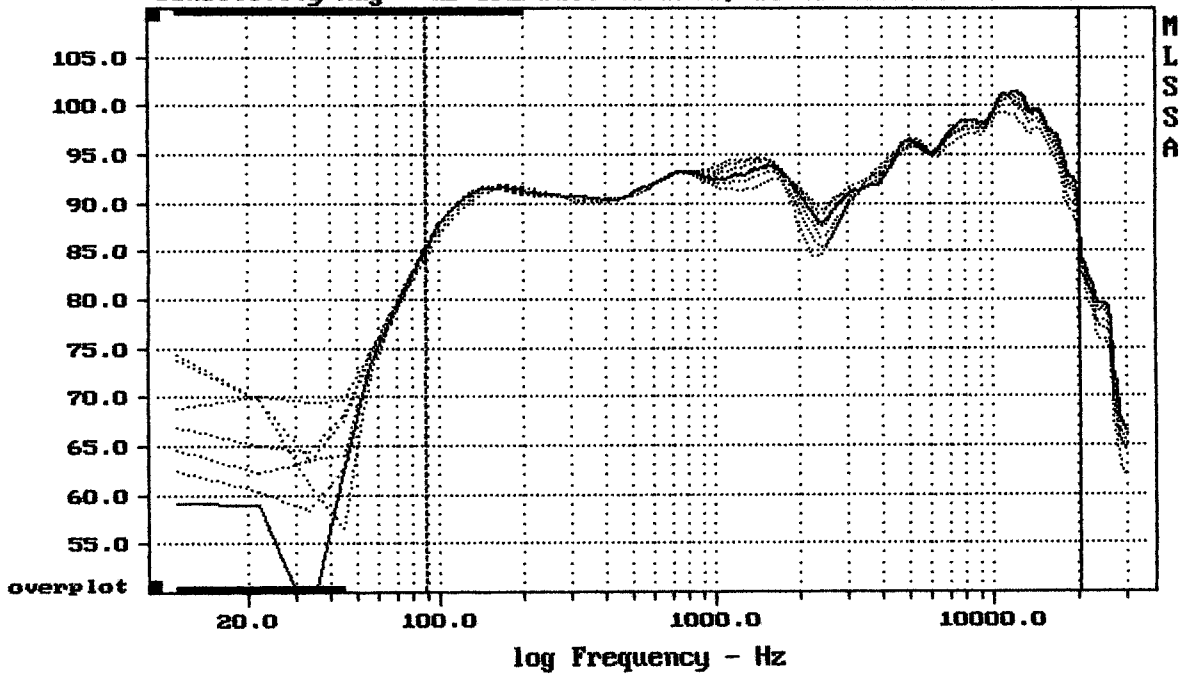

Overlay Compare: dev= +3.3/-2.8, std= 1.3, avg= -1.6

RCF M801


MLSSA: Frequency Domain

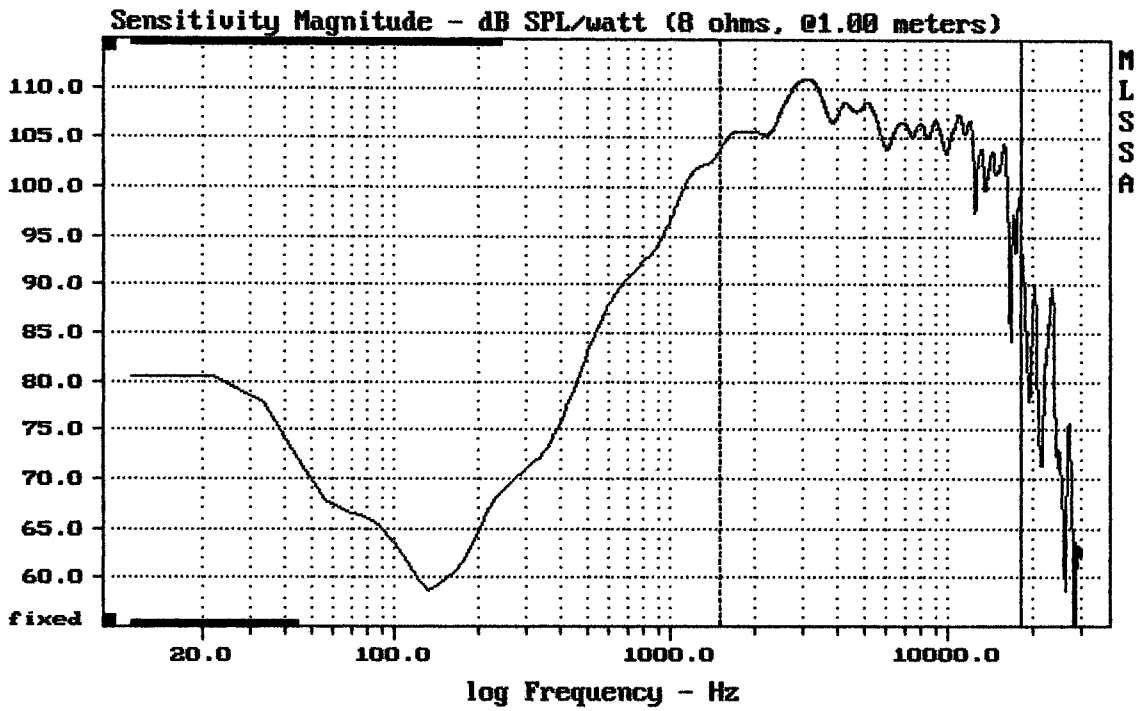

Level (1498:18299 Hz) = 106.70 dB SPL/watt (8 ohms, @1.00 meters)


MB01

MLSSA: Frequency Domain

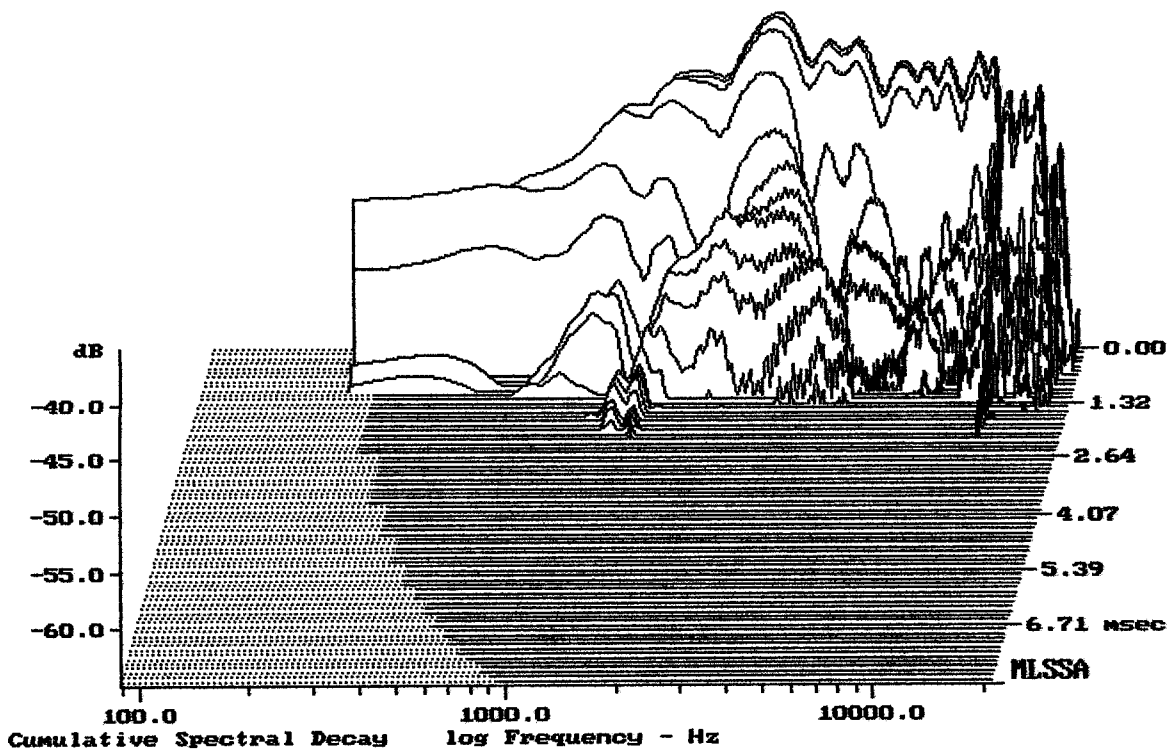

-64.19 dB, 1420 Hz (32), 2.090 msec (20)


DTTO

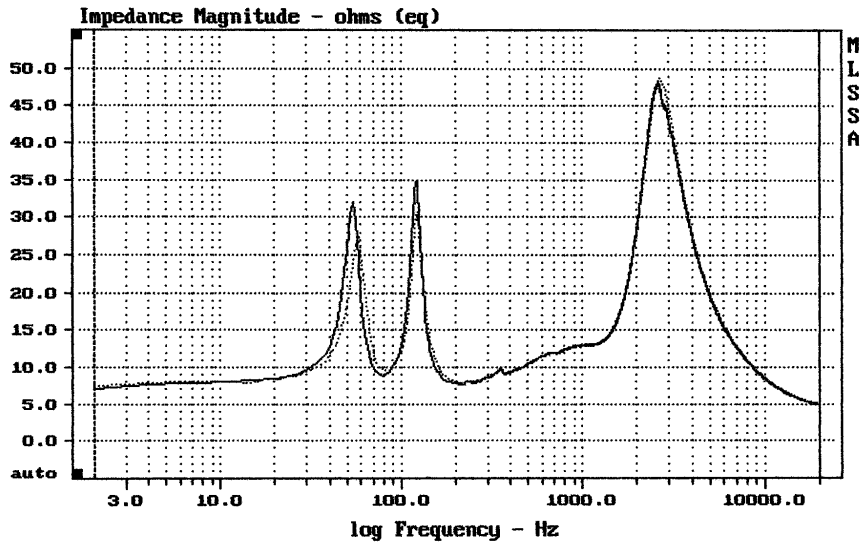

Overlay Compare: dev= +9.4/-6.3, std= 0.45, avg= -0.12

M801 2x


MLSSA: Frequency Domain

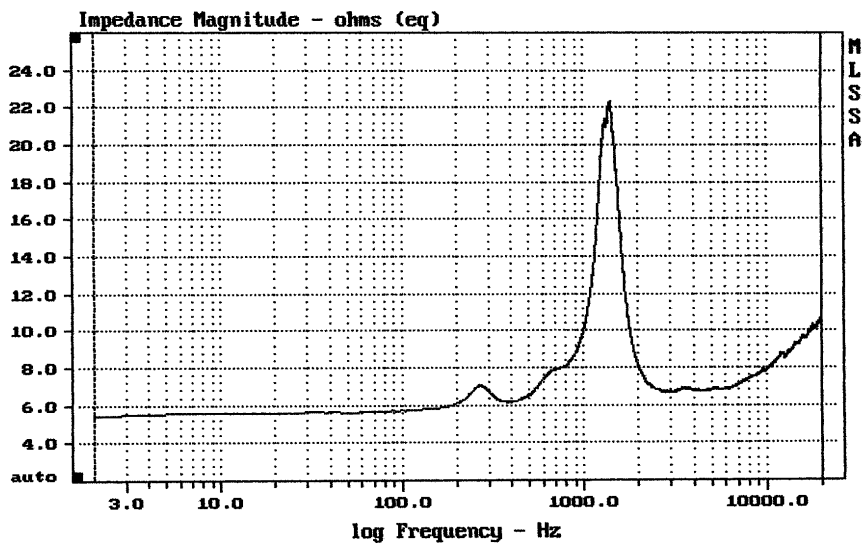

mean: 8.597, rms: 8.858, std: 2.137, max: 22.31, min: 5.404

M801


MLSSA: Frequency Domain

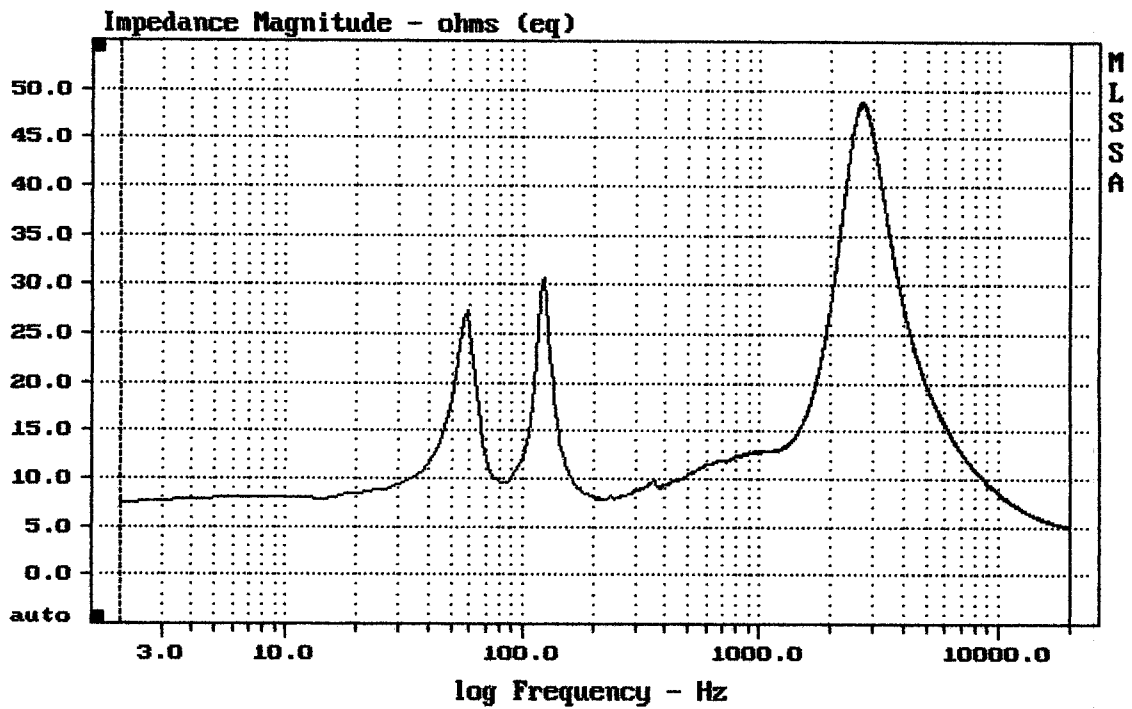

mean: 12.74, rms: 16.42, std: 10.36, max: 48.79, min: 4.975

RCF M801


MLSSA: Frequency Domain

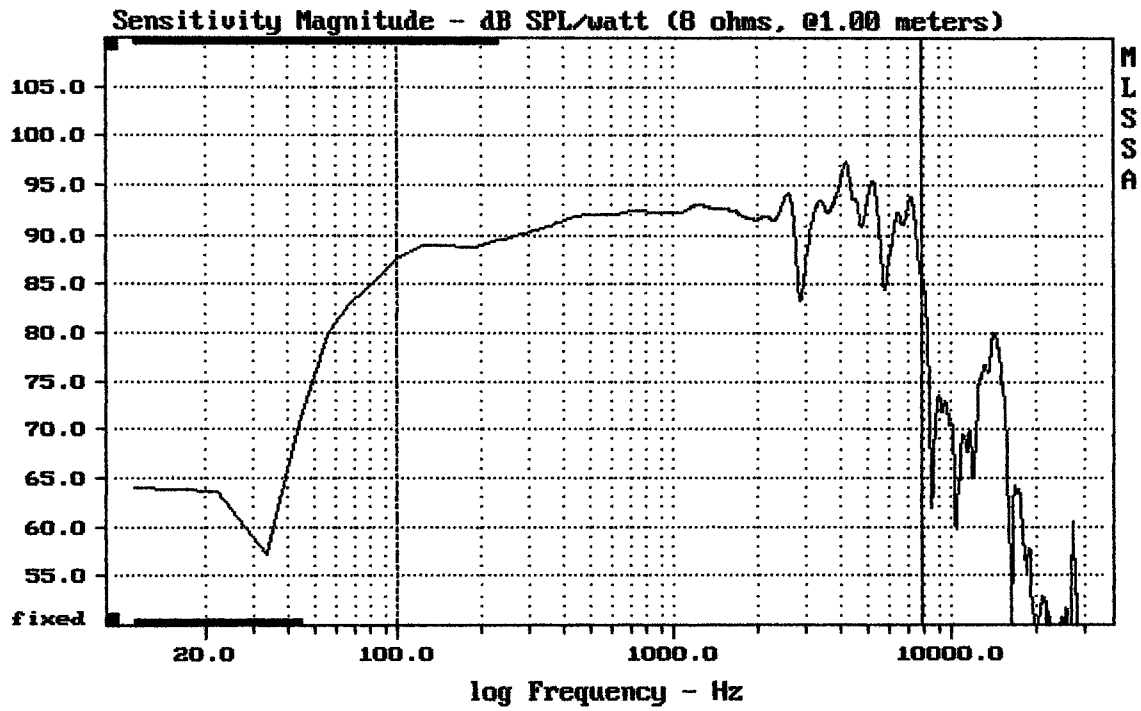

Level (100:7801 Hz) = 91.65 dB SPL/watt (8 ohms, @1.00 meters)

M801

MLSSA: Frequency Domain

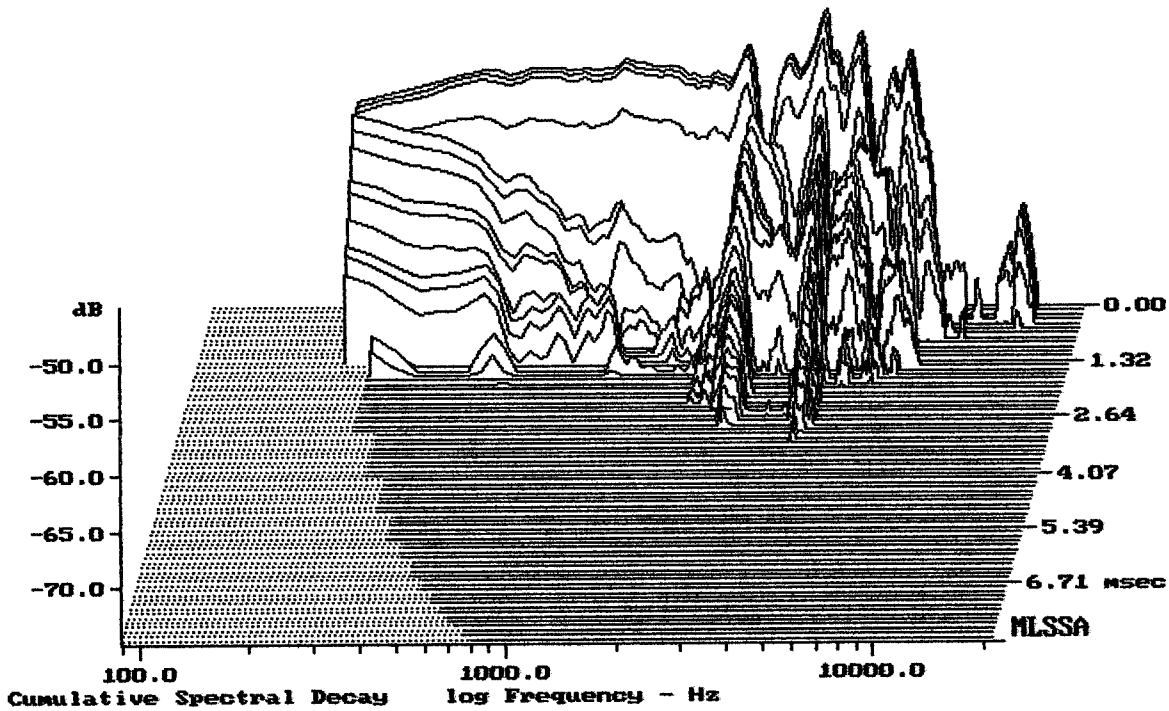

-73.64 dB, 2619 Hz (59), 2.860 msec (27)

DTTO

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.32	Ohms
2	Fs	86.02	Hz
3	Re	6.78	Ohms[dc]
4	Res	55.08	Ohms
5	Qms	6.36	
6	Qes	0.78	
7	Qts	0.70	
8	L1	0.66	mH
9	L2	0.86	mH
10	R2	2.59	Ohms
11	RMSE-load	0.26	Ohms
12	Vas(Sd)	12.74	liters
13	Mms	18.26	grams
14	Cms	187	$\mu\text{M}/\text{Newton}$
15	B1	9.25	Tesla-M
16	SPLref(Sd)	92.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (30.00 grams)

Area (Sd): 220.00 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -37.4% (-20% to -50% is recommended).

8" FROM RCF M801

MLSSA: Parameters

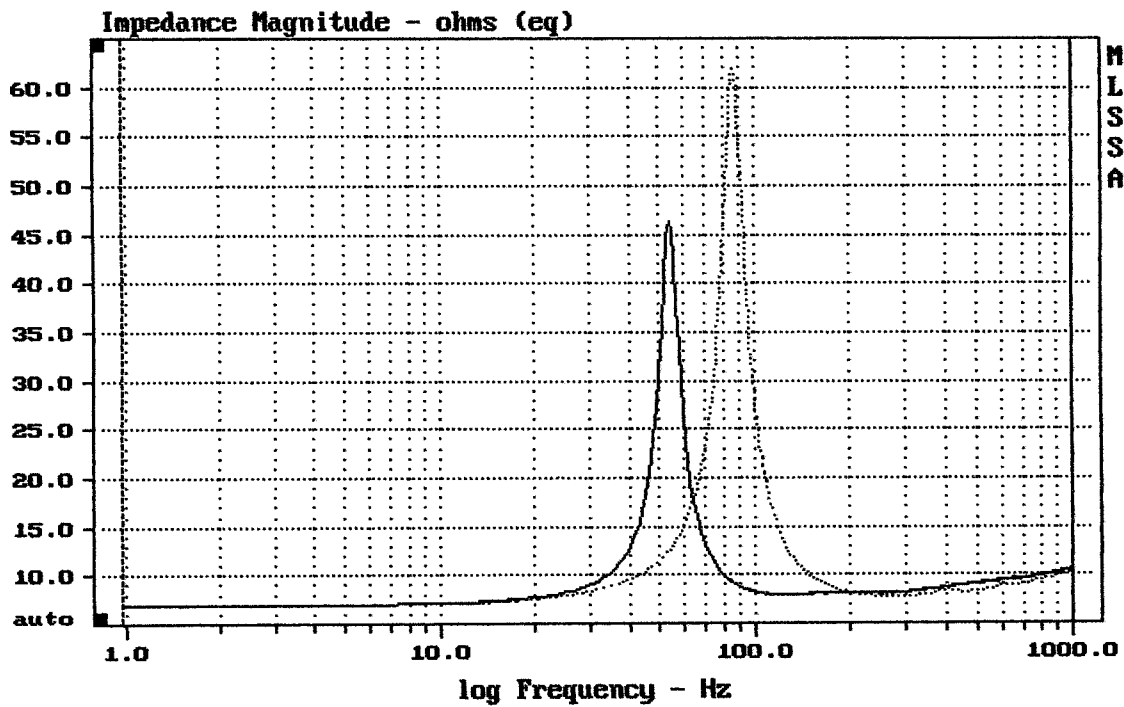

mean: 10.27, rms: 12.13, std: 6.467, max: 61.82, min: 6.894

MLSSA: Frequency Domain