

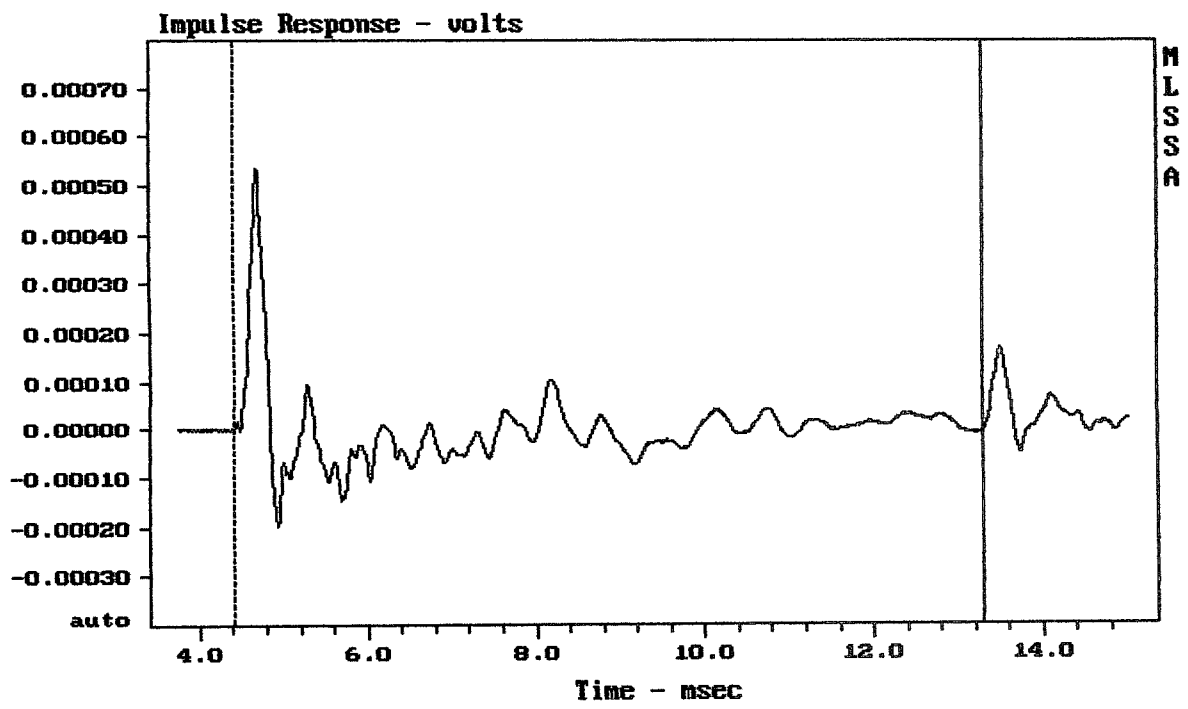

---

Level (55:2009 Hz) = 91.79 dB SPL/watt (8 ohms, @1.50 meters)

---

PD.186/2

MLSSA: Frequency Domain




---

mean: -1.644e-006, rms: 7.711e-005, std: 7.709e-005, max: 0.0005364, min: -0.0

---

PD.186/2

MLSSA: Time Domain

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.80	Ohms
2	Fs	40.53	Hz
3	Re	6.24	Ohms[dc]
4	Res	107.68	Ohms
5	Qms	12.17	
6	Qes	0.71	
7	Qts	0.67	
8	L1	1.92	mH
9	L2	2.83	mH
10	R2	10.39	Ohms
11	RMSE-load	0.74	Ohms
12	Vas(Sd)	154.22	liters
13	Mms	190.34	grams
14	Cms	81	$\mu\text{M}/\text{Newton}$
15	B1	20.71	Tesla-M
16	SPLref(Sd)	93.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1164.16 sq cm

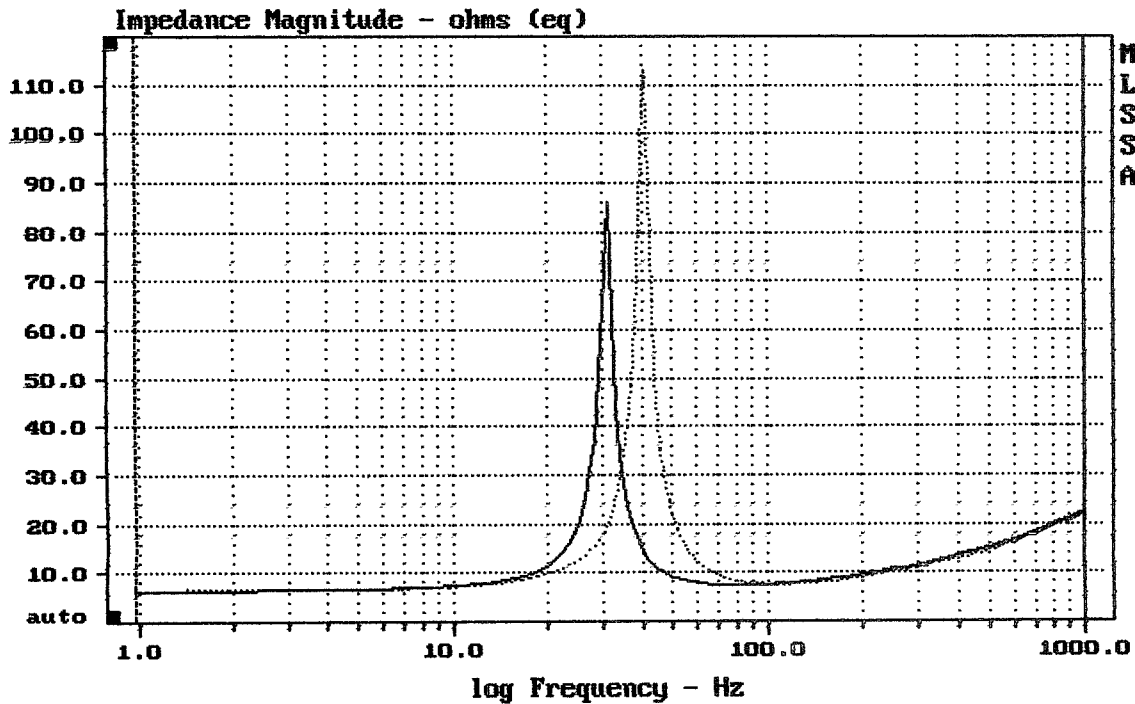
DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.6% (-20% to -50% is recommended).

PD.186/2

MLSSA: Parameters



mean: 15.49, rms: 17.23, std: 7.539, max: 112.9, min: 6.328

MLSSA: Frequency Domain