


mean: 98.28, rms: 98.48, std: 2.00, max: 101.27, min: 85.58


ART315-A MK III NEW

MLSSA: Frequency Domain

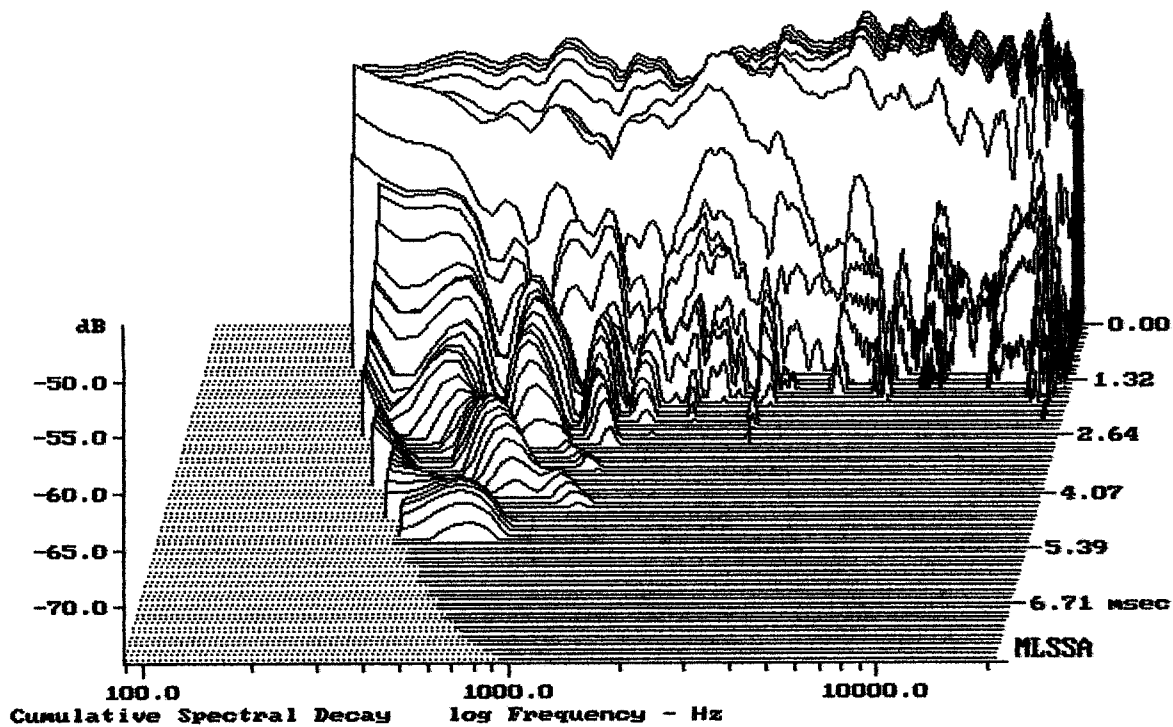

-75.00 dB, 3018 Hz (68), 2.530 msec (24)


DT10

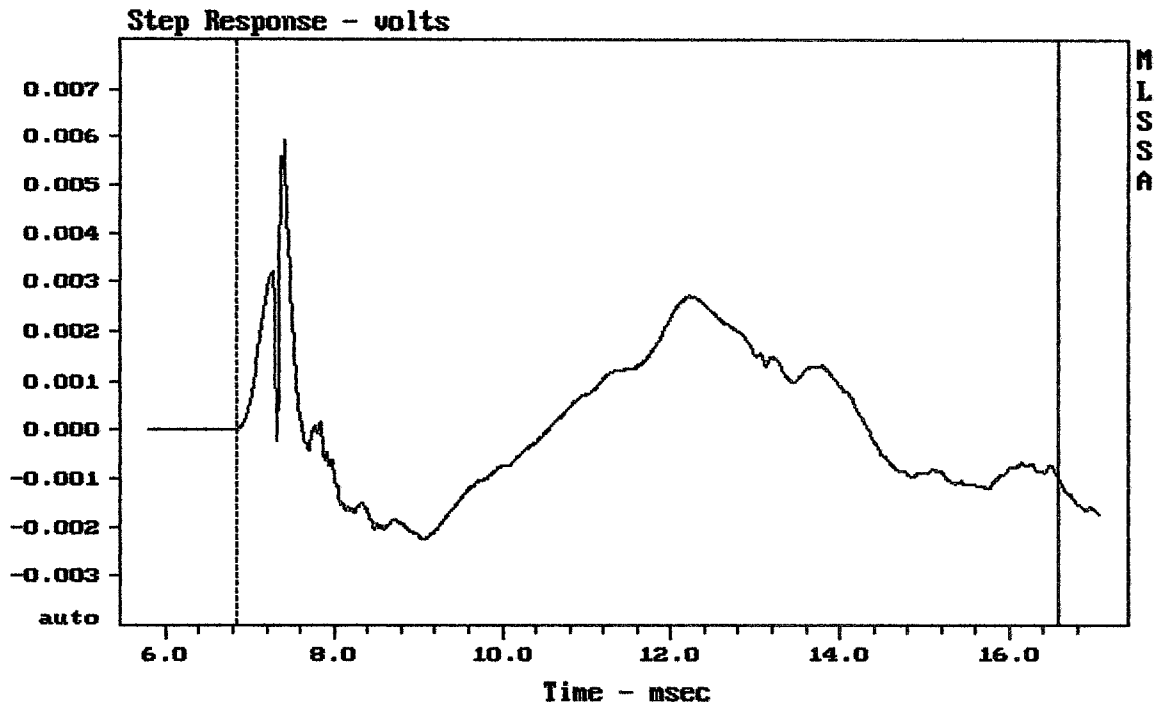

mean: 0.0001286, rms: 0.001503, std: 0.001497, max: 0.005945, min: -0.002266

ART315-A MK III NEW


MLSSA: Time Domain

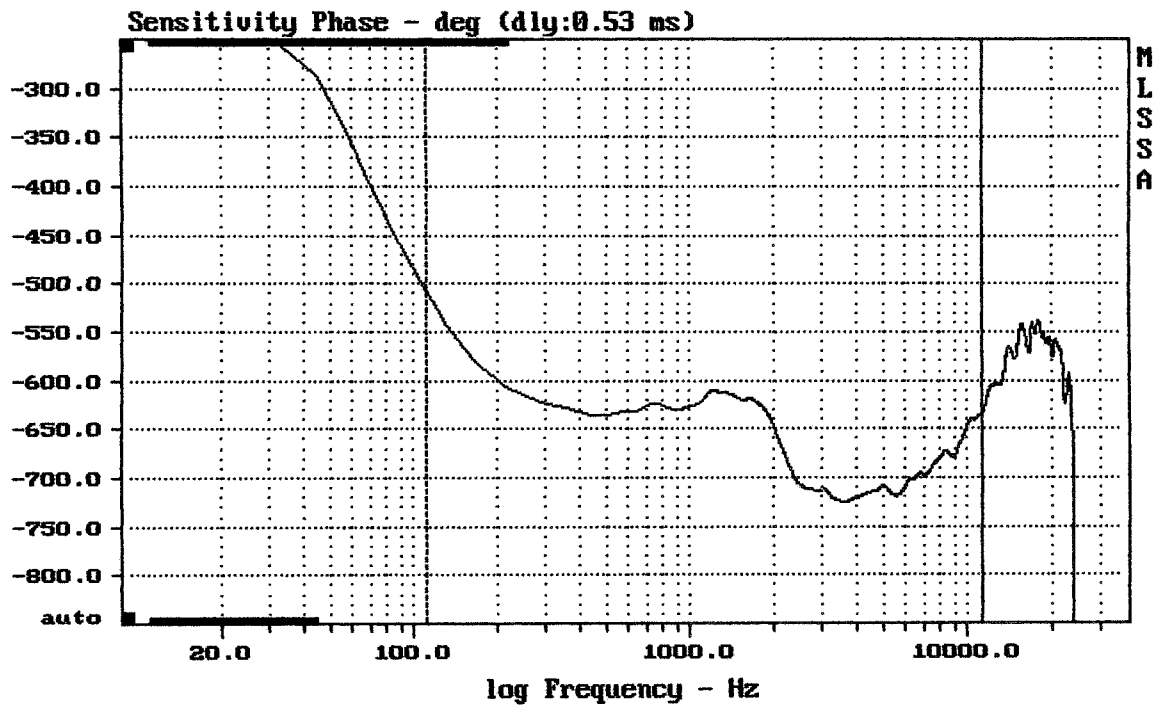

mean: -676.8, rms: 677.8, std: 36.73, max: -507.2, min: -725.5

ART315-A MK III NEW


MLSSA: Frequency Domain

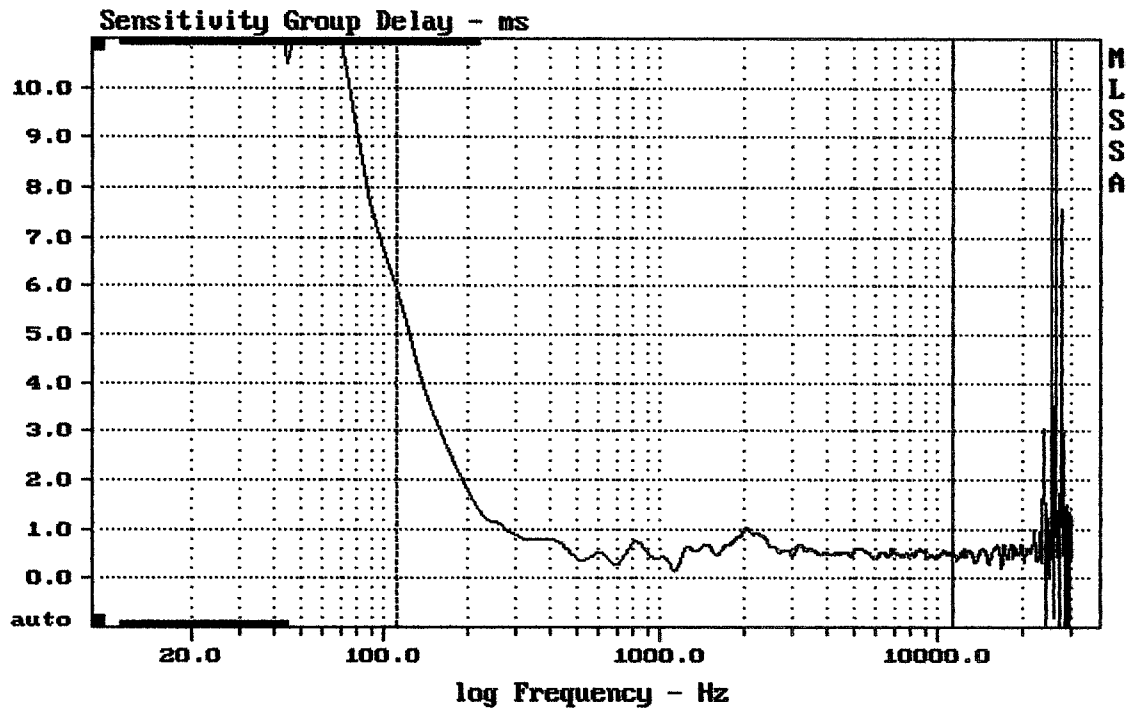

mean: 0.5653, rms: 0.654, std: 0.3288, max: 5.932, min: 0.1528

ART315-A MK III NEW


MLSSA: Frequency Domain

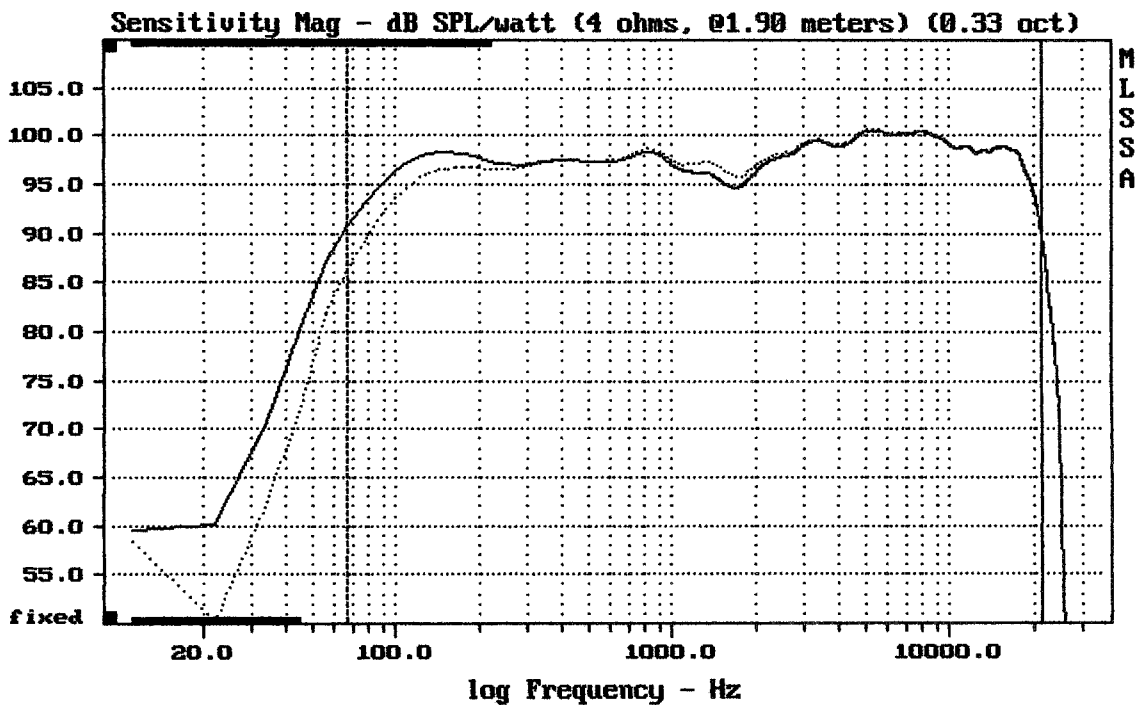

Overlay Compare: dev= +4.5/-1.3, std= 0.3, avg= -0.086

ART315-A MK III NEW


MLSSA: Frequency Domain

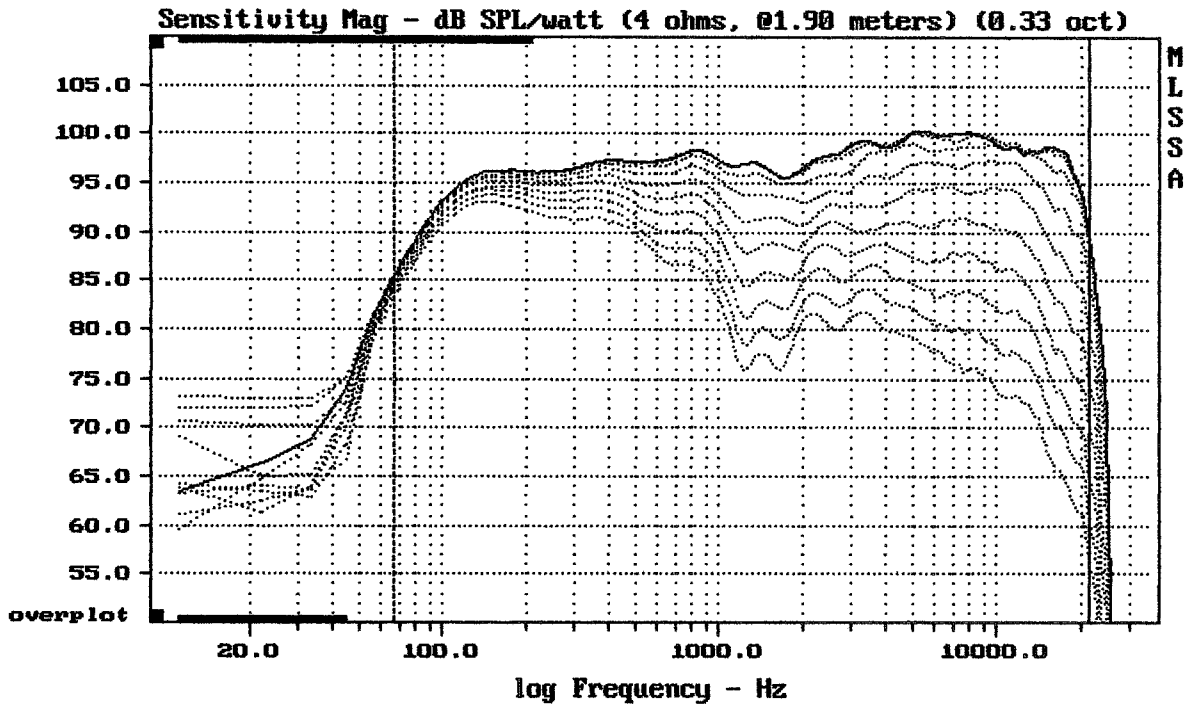

Overlay Compare: dev= +23/-8.5, std= 6.5, avg= -25

ART315-A MK III NEW


MLSSA: Frequency Domain

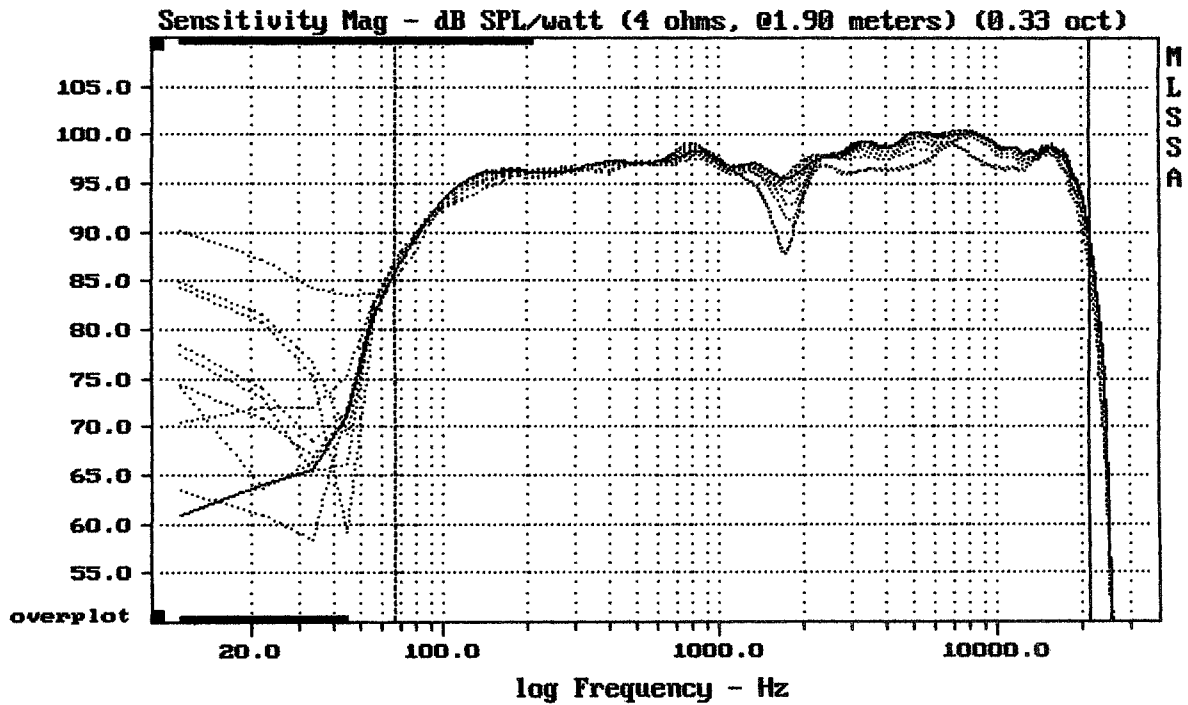

CURSOR: y = 84.728 x = 21606.4447 (1947)

ART315-A MK III NEW


MLSSA: Frequency Domain

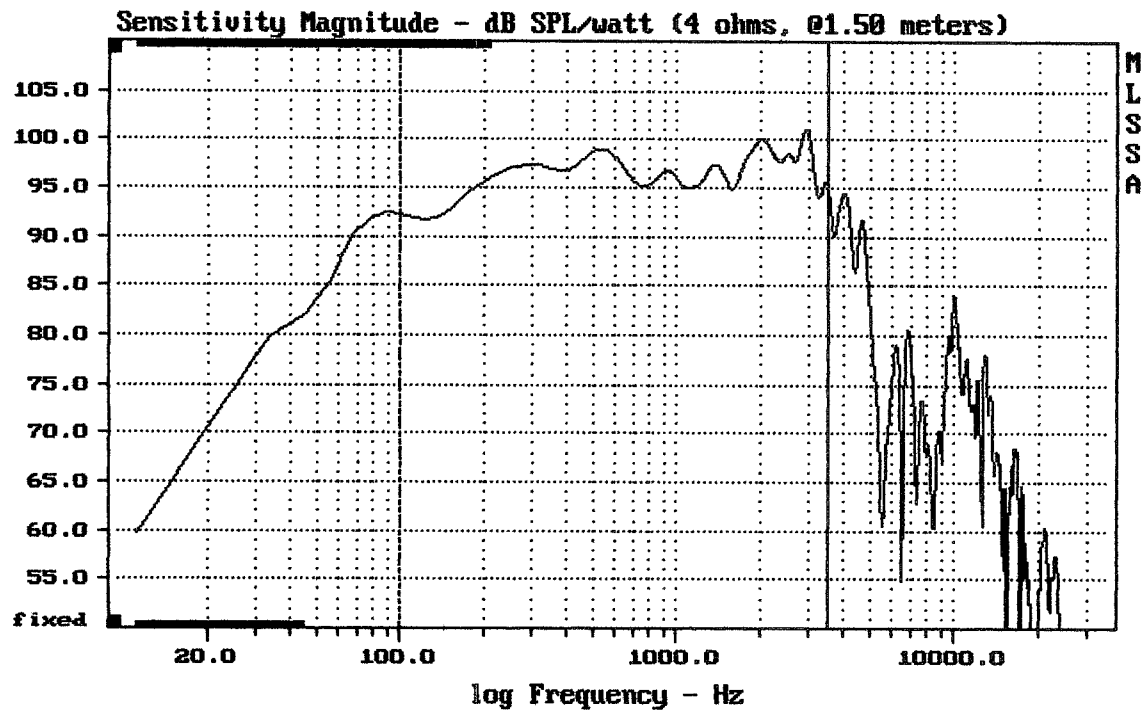

Level (100:3507 Hz) = 96.73 dB SPL/watt (4 ohms, @1.50 meters)


ART315-A MK III NEW

MLSSA: Frequency Domain

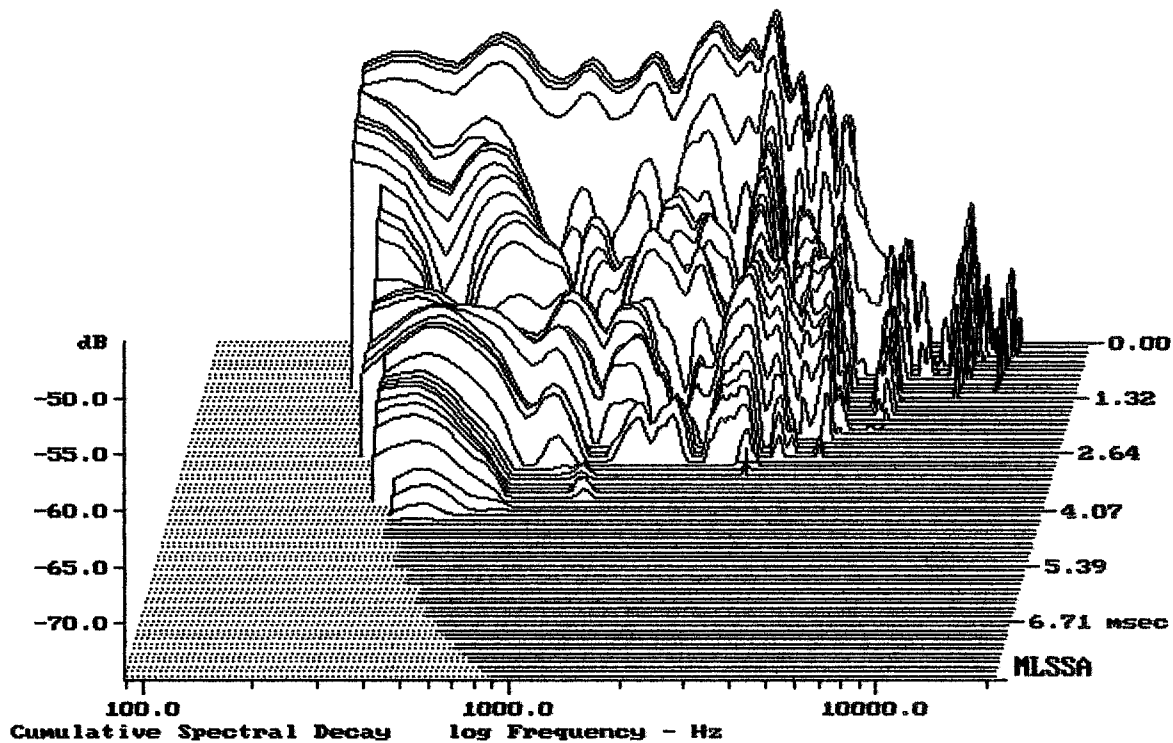

-74.19 dB, 3063 Hz (69), 3.000 msec (29)


DTTO

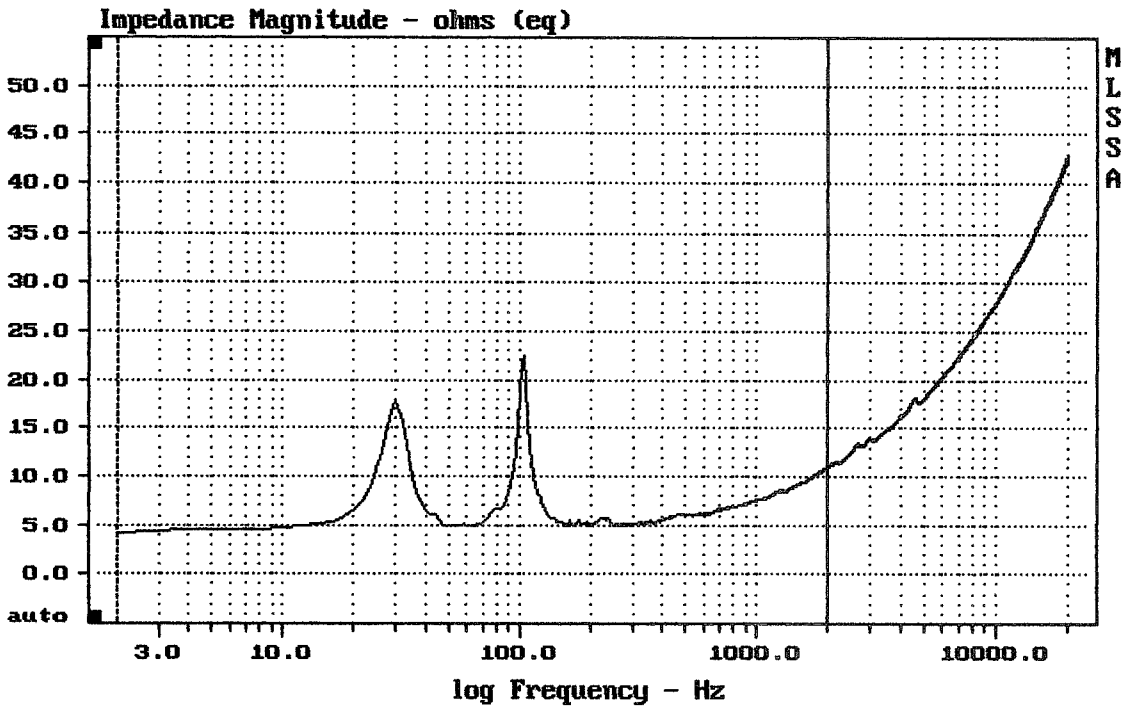

mean: 7.858, rms: 8.124, std: 2.062, max: 22.53, min: 4.121

ART315-A MK III NEW

MLSSA: Frequency Domain

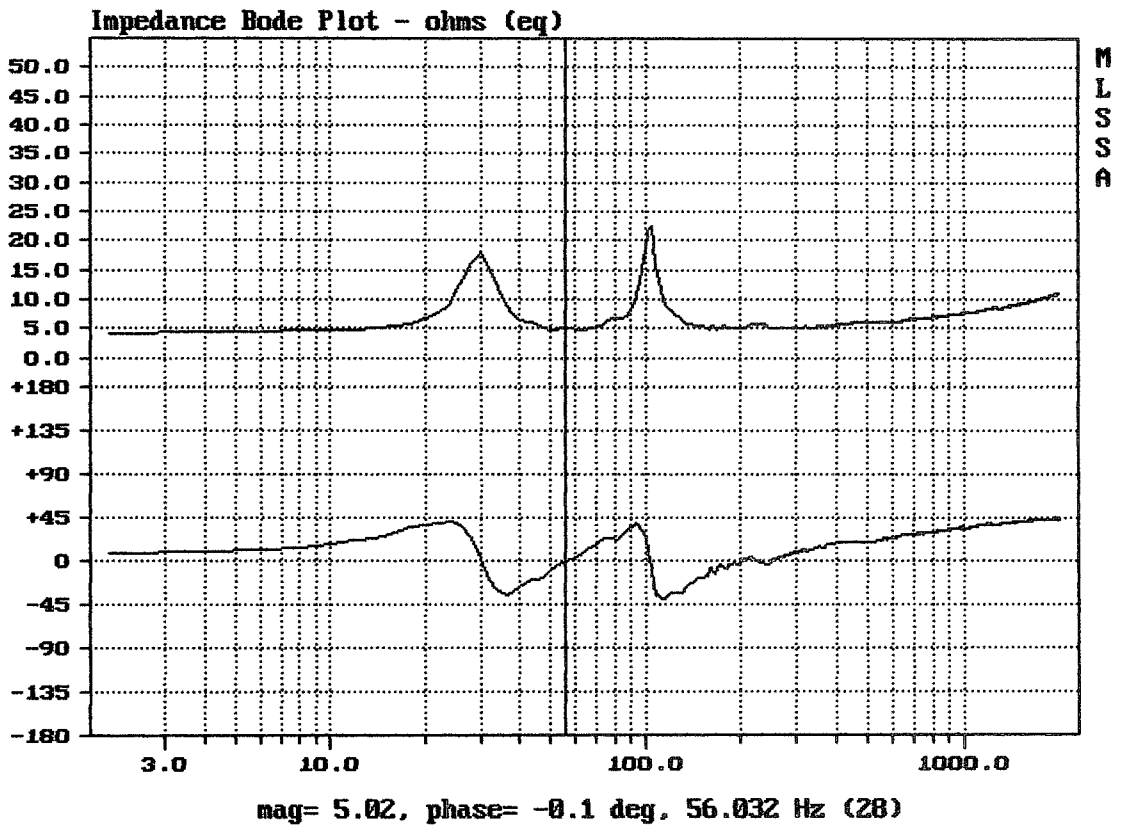

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.27	Ohms
2	Fs	51.33	Hz
3	Re	3.30	Ohms[dc]
4	Res	38.22	Ohms
5	Qms	6.17	
6	Qes	0.53	
7	Qts	0.49	
8	L1	0.51	mH
9	L2	0.73	mH
10	R2	3.00	Ohms
11	RMSE-load	0.17	Ohms
12	Vas(Sd)	125.92	liters
13	Mms	78.45	grams
14	Cms	123	$\mu\text{M}/\text{Newton}$
15	B1	12.52	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.6% (-20% to -50% is recommended).

ART315-A MK III NEW

MLSSA: Parameters

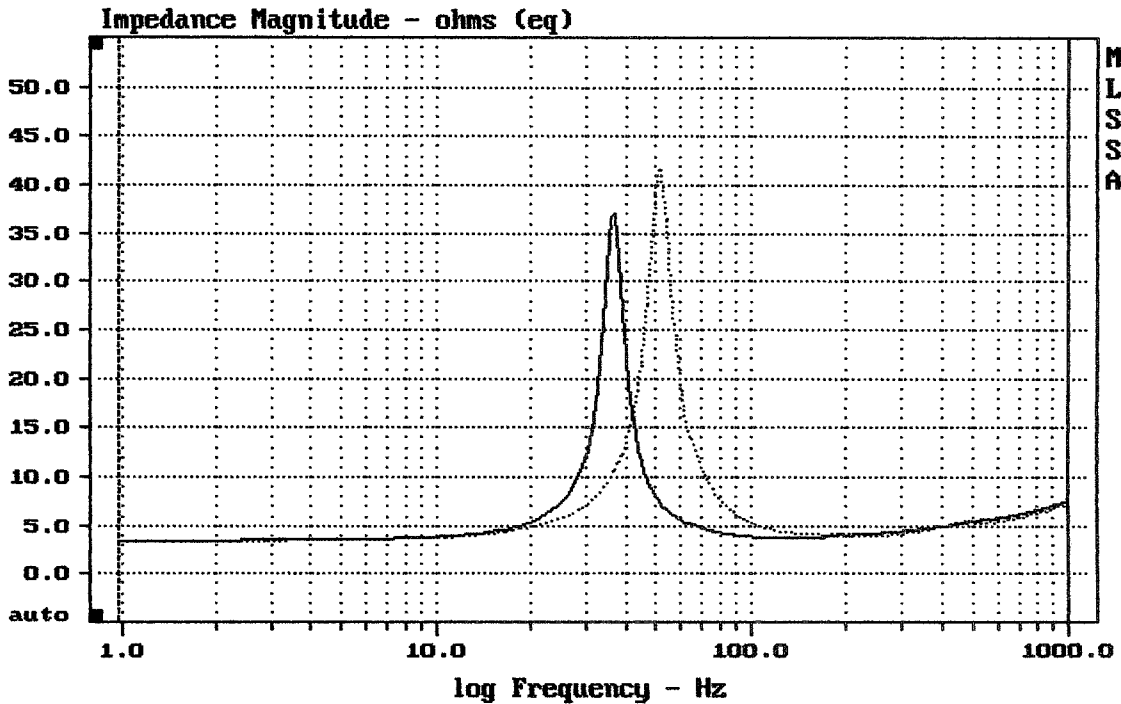

mean: 6.02, rms: 7.031, std: 3.632, max: 41.6, min: 3.411

MLSSA: Frequency Domain